



Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

TO
PCK

A
B
C
D
E
F

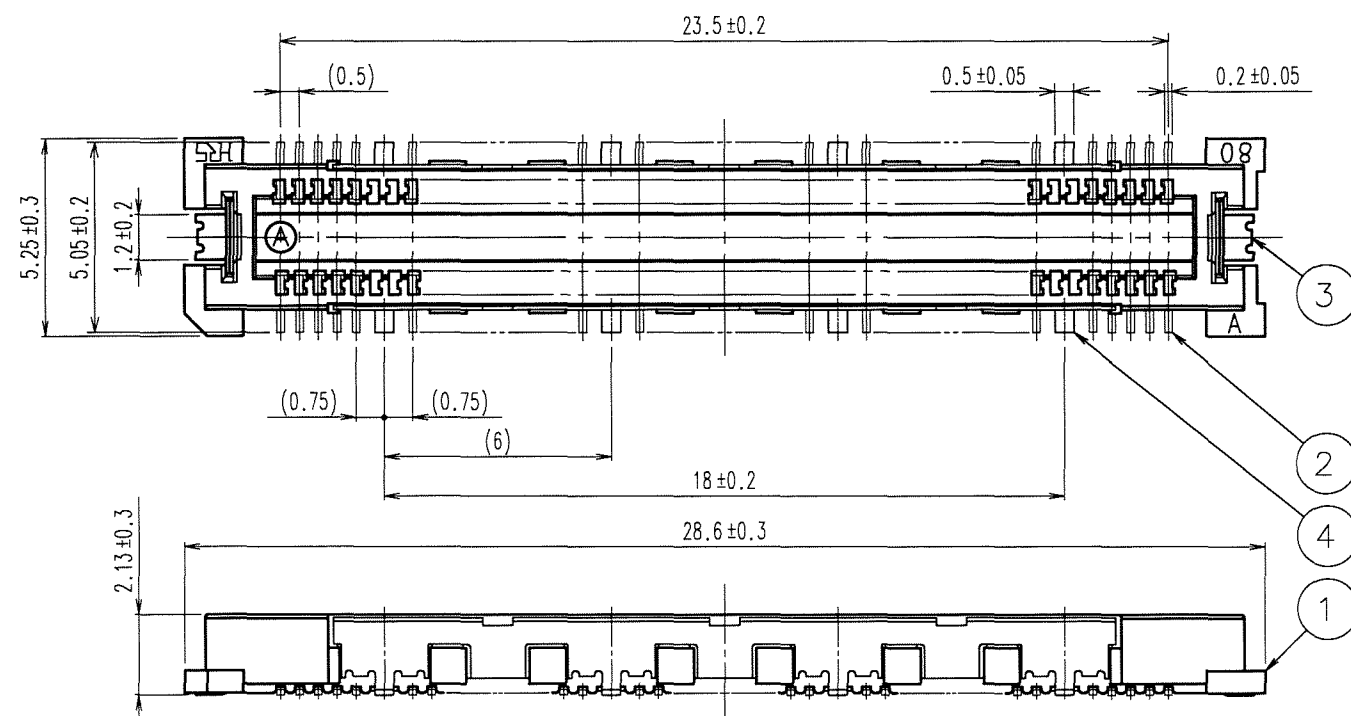


RECOMMENDED LAND PATTERN DIMENSION OF PCB

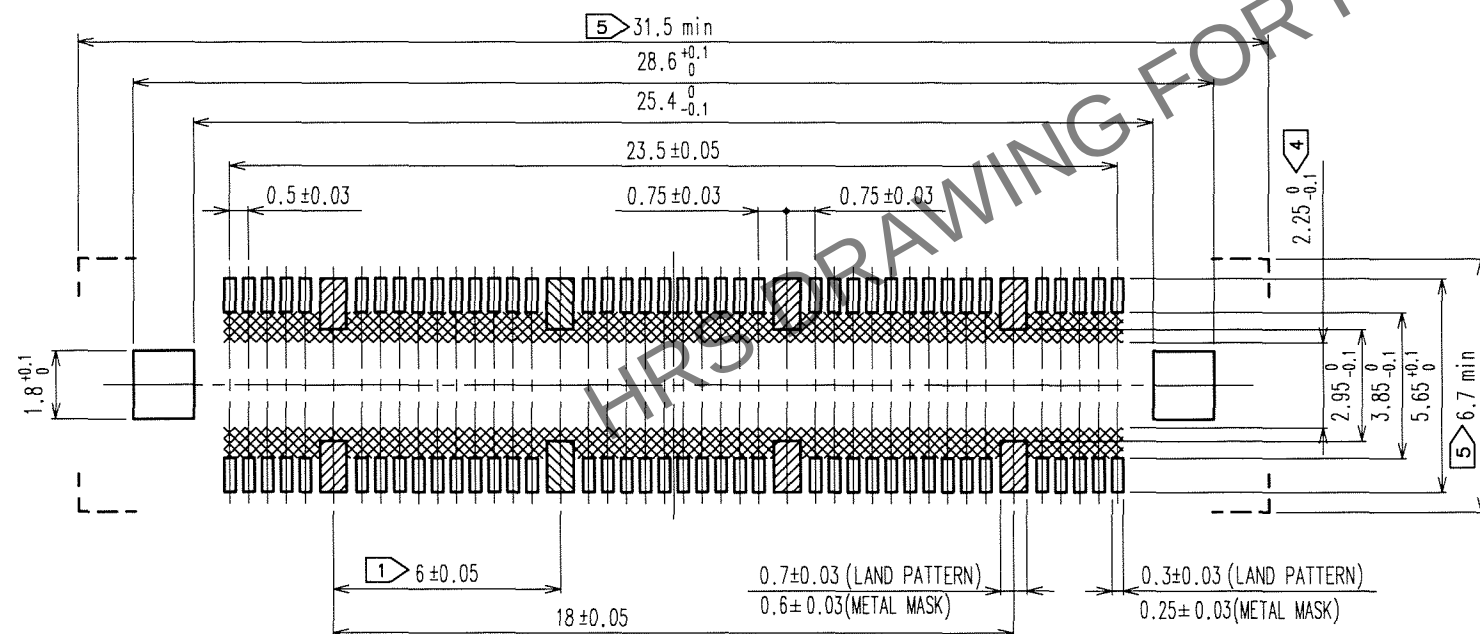


- NOTES
- ① 8 HATCHED PARTS:GROUND CIRCUIT.
 - ② SMT LEAD-COPLANARITY:0.1 MAX.
 - ③ THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - ④ MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND ,OR LEAD MAY TOUCH PATTERN.(THIS APPLIES TO HATCHED AREA.)
 - ⑤ DO NOT MOUNT OTHER DEVICES ONTO AREA ,OR MATING PAIR CANNOT BE MATED.
 - ⑥ THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△				.	△				.
△				.	△				.
△				.	△				.

SIGNAL PORTION CROSS SECTION (10:1)

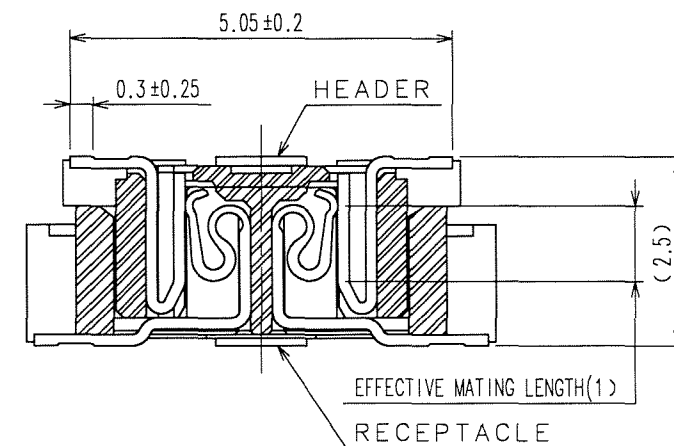

GROUND PORTION CROSS SECTION (10:1)

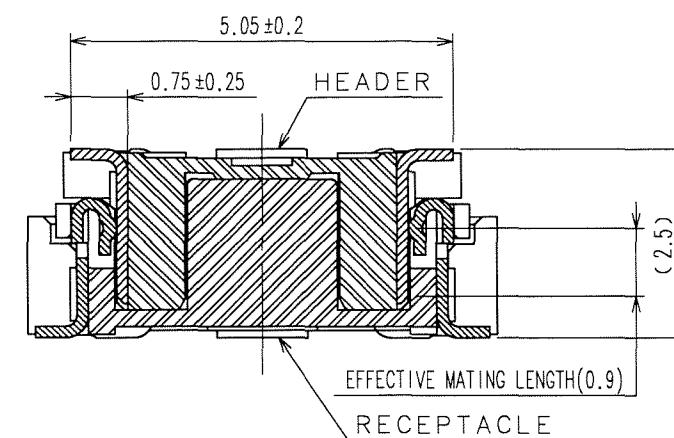

3, 4	PHOSPHOR BRONZE	TIN-PLATING	2	COPPER ALLOY	CONTACT AREA:GOLD 0.1 μm min.
1	LCP	BEIGE UL94V-0			LEAD AREA:GOLD FLASH
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	UNDER PLATING:NICKEL 1 μm min.
CODE NO.(OLD)	CL		DRAWN	DESIGNED	CHECKED
			S.KAMIGA	H.Nakamura	J.-C.Ogawa
			06.05.13	06.05.13	06.05.13
APPROVED	RELEASED				
SCALE	DRAWING NO.	PART NO.			
5 : 1	EDC3-152602-25	FX11B-80P/8-SV(71)			
UNITS	mm	CODE NO.			
		CL573-0513-6-71			