


Dec.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

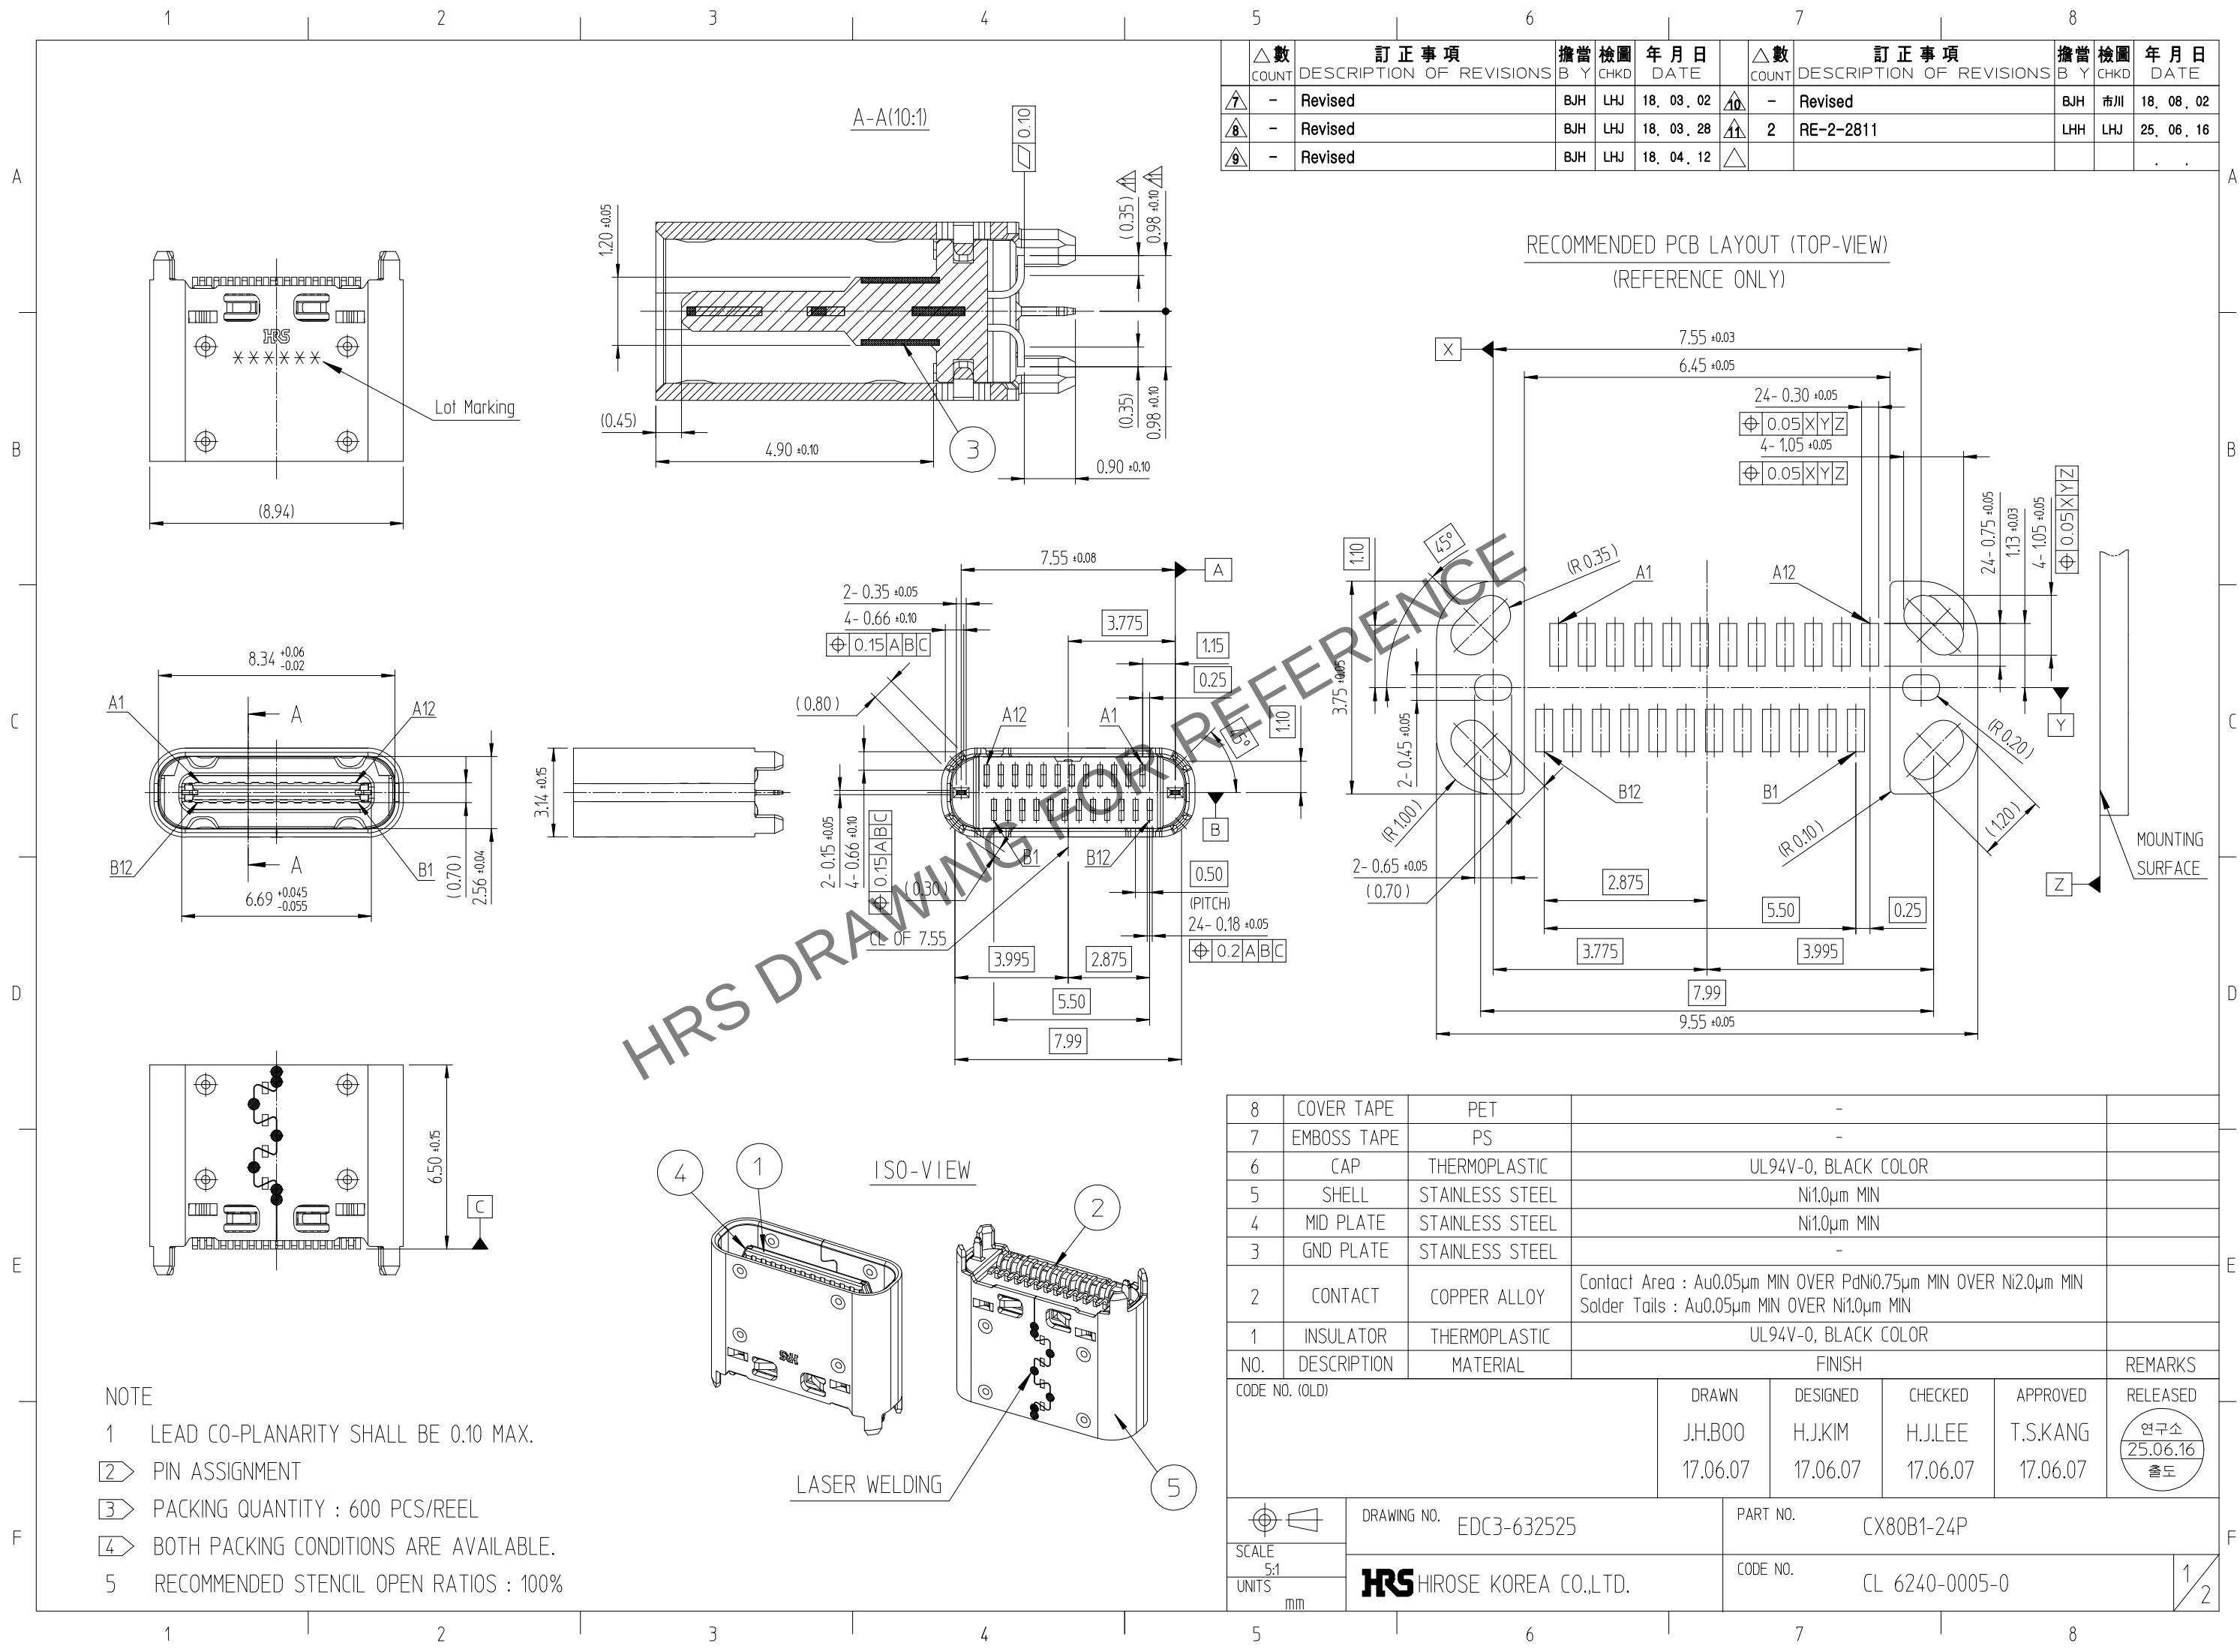

△數		訂正事項	擔當		檢圖	年月日	△數		訂正事項	擔當		檢圖	年月日
COUNT		DESCRIPTION OF REVISIONS	B	Y	CHKD	DATE	COUNT		DESCRIPTION OF REVISIONS	B	Y	CHKD	DATE
△7	-	Revised	BJH		LHJ	18. 03. 02	△10	-	Revised	BJH		市川	18. 08. 02
△8	-	Revised	BJH		LHJ	18. 03. 28	△11	2	RE-2-2811	LHH		LHJ	25. 06. 16
△9	-	Revised	BJH		LHJ	18. 04. 12	△						

RECOMMENDED PCB LAYOUT (TOP-VIEW)
(REFERENCE ONLY)

8	COVER TAPE	PET					
7	EMBOSS TAPE	PS					
6	CAP	THERMOPLASTIC	UL94V-0, BLACK COLOR				
5	SHELL	STAINLESS STEEL	Ni1.0μm MIN				
4	MID PLATE	STAINLESS STEEL	Ni1.0μm MIN				
3	GND PLATE	STAINLESS STEEL	-				
2	CONTACT	COPPER ALLOY	Contact Area : Au0.05μm MIN OVER PdNi0.75μm MIN OVER Ni2.0μm MIN Solder Tails : Au0.05μm MIN OVER Ni1.0μm MIN				
1	INSULATOR	THERMOPLASTIC	UL94V-0, BLACK COLOR				
NO.	DESCRIPTION	MATERIAL	FINISH				REMARKS
CODE NO. (OLD)			DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
			J.H.BOO	H.J.KIM	H.J.LEE	T.S.KANG	연구소 25.06.16 출도
			17.06.07	17.06.07	17.06.07	17.06.07	
	DRAWING NO.		PART NO.				
SCALE	EDC3-632525		CX80B1-24P				
5:1							
UNITS	HRS HIROSE KOREA CO.,LTD.		CODE NO.		CL 6240-0005-0		
mm					1/2		

Dec.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

