



A


A±0.3

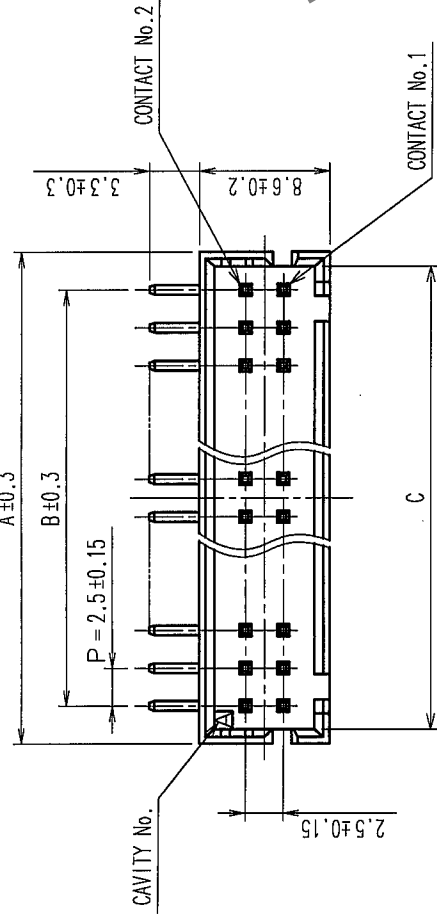


B

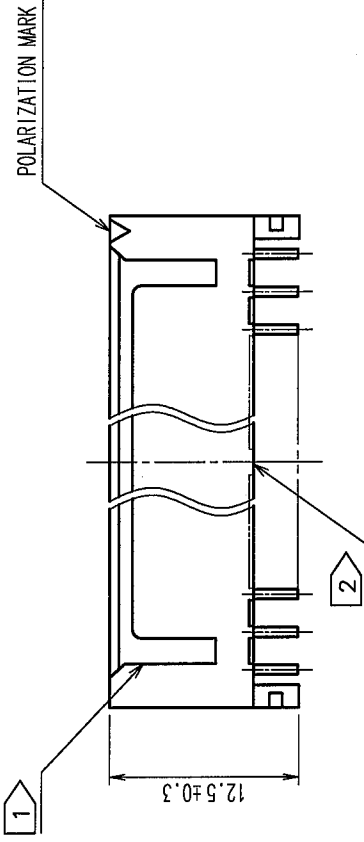

C

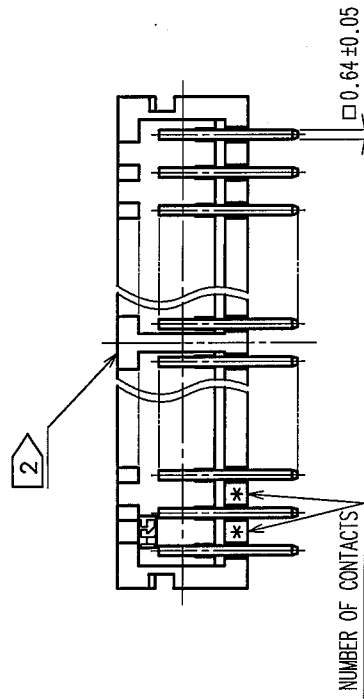

D

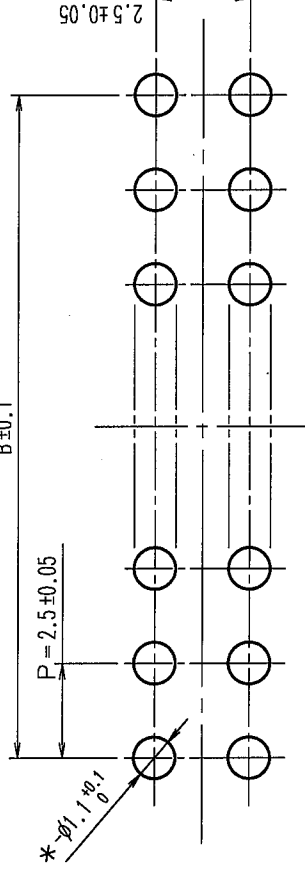

NOTE 1: FOR 4 AND 6 CONTACTS, ONE MIS-INSERTION DEPRESSION SHALL BE MADE, FOR OTHERS, 2 MIS-INSERTION DEPRESSION AS SHOWN IN FIGURE 2.
2: STAND-OFF SHALL MOVE RIGHT FOR 1.25 WHEN ONE-SIDE, ONE-ROW IS ODD. (Stand-off design shall be available for eight contacts and over)

E

2	BRASS	SURFACE: GOLD PLATED 0.2μm min UNDER PLATING: NICKEL PLATED 1μm min	3	BRASS	SURFACE: GOLD PLATED 0.2μm min UNDER PLATING: NICKEL PLATED 1μm min
1	POLYAMIDE	NATURAL (WHITE), UL 94V-0			
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD)		DRAWN	DESIGNED	CHECKED	APPROVED
		A. Miura	S. Benkeppa H. Hachara	J. Ona	
		'06.02.15	'06.02.15	'06.02.20	'06.02.20
DRAWING NO.		PART NO.		RELEASED	
EDC3-071801-03		DF1B-*DP-2.5DS(01)			
SCALE		CODE NO.			
2 : 1					
UNITS					
mm					

F

TO

HRS

HIROSE ELECTRIC CO., LTD

CL541

1/1

1

2

3

4

5

6

7

8

9