

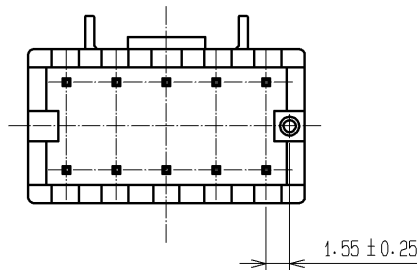
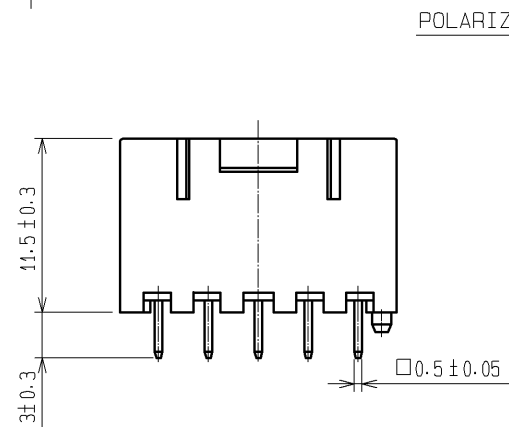



Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

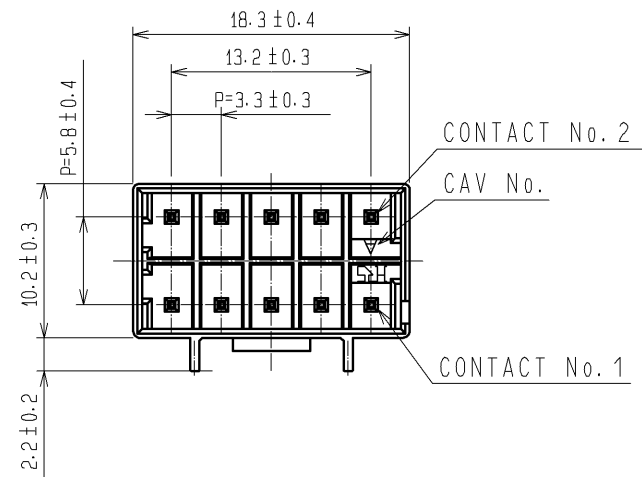


POLARIZATION MARK

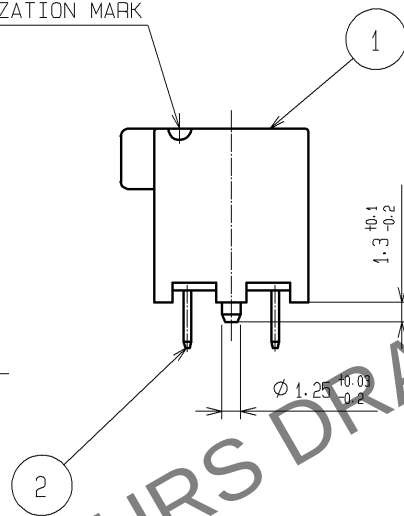

APRICATION DIAGRAM

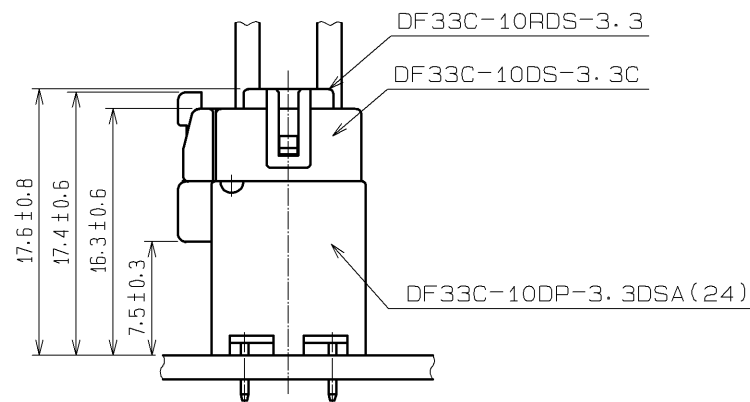


RECOMMENDED PATTERN(5:1)
(RECOMMENDED BOARD THICKNESS t=1.6mm)

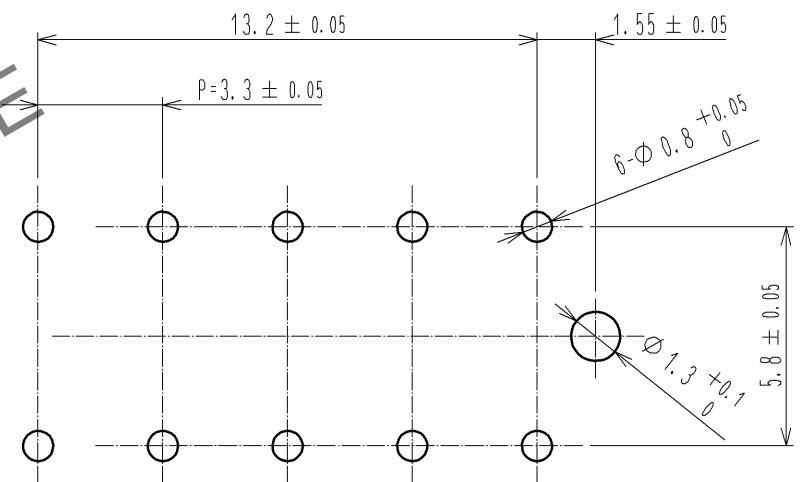

NOTES 1 :IMMERSION DEPTH INTO POTTIING SOLUTION:6.5mm

1	PBT	WHITE, UL94V-0	3	HIPS	TRAY
			2	BRASS	SURFACE:TIN PLATED 1μm min UNDER PLATING:NICKEL PLATED 0.5μm min
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	
HIROSE ELECTRIC CO., LTD.		APPROVED : KI. AKIYAMA	13. 03. 11	DRAWING NO. EDC3-338390-02	
		CHECKED : TS. KUMAZAWA	13. 03. 11	PART NO. DF33C-10DP-3. 3DSA(24)	
		DESIGNED : HT. SATO	13. 03. 11	CODE NO. CL676-1116-9-24	
		DRAWN : MI. SAKIMURA	13. 03. 08		

Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

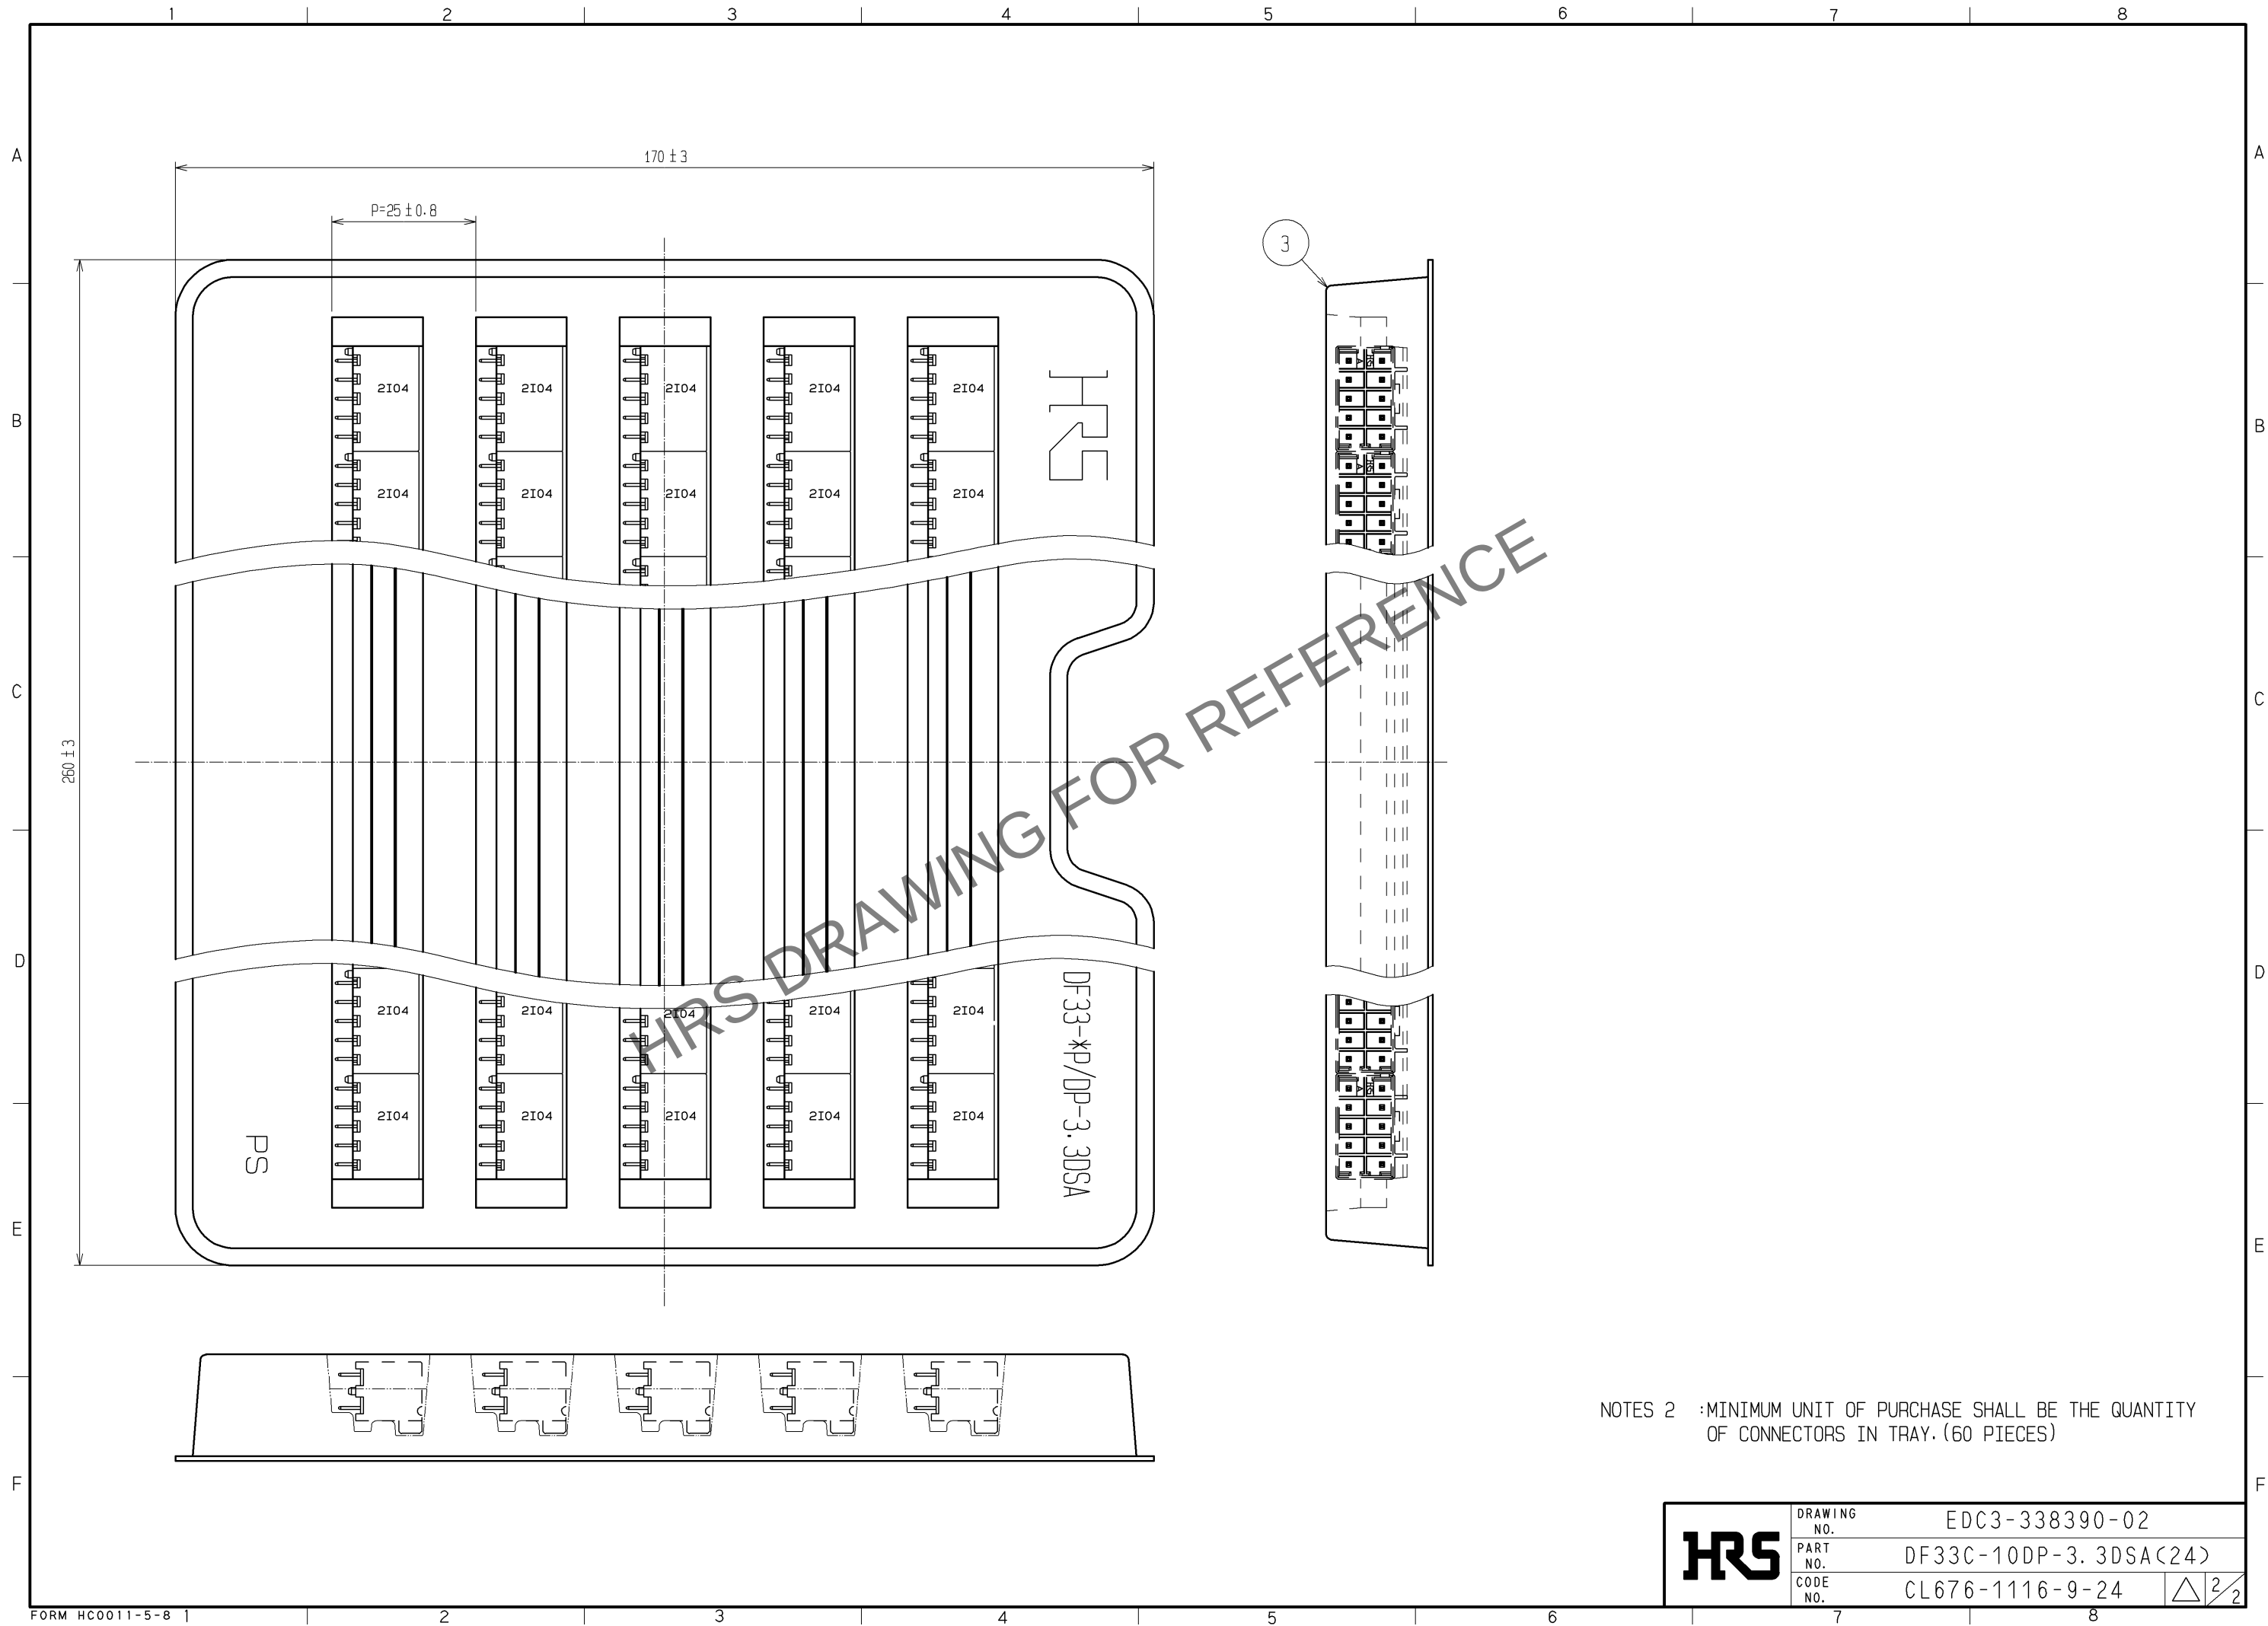

NOTES 2 :MINIMUM UNIT OF PURCHASE SHALL BE THE QUANTITY
OF CONNECTORS IN TRAY.(60 PIECES)

HRS	DRAWING NO.	EDC3-338390-02	
	PART NO.	DF33C-10DP-3. 3DSA(24)	
	CODE NO.	CL676-1116-9-24	△2/2