

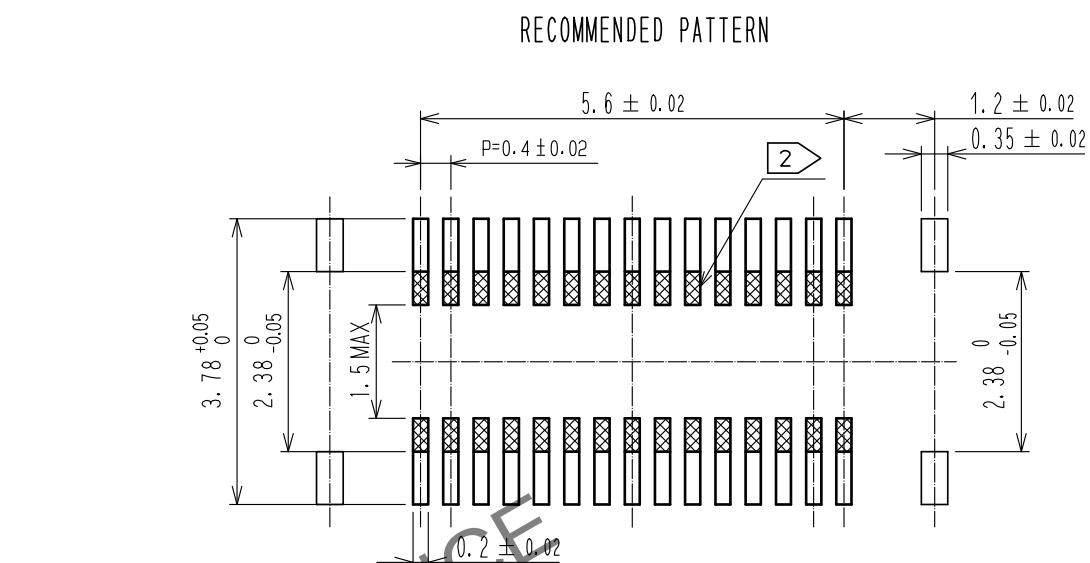
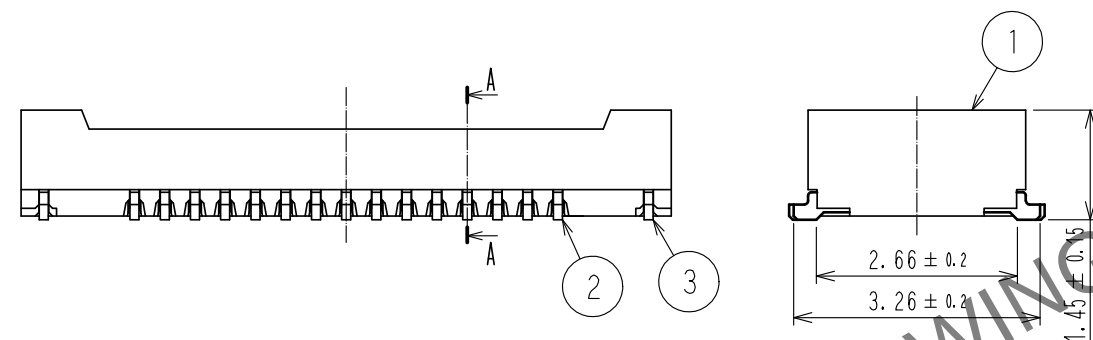
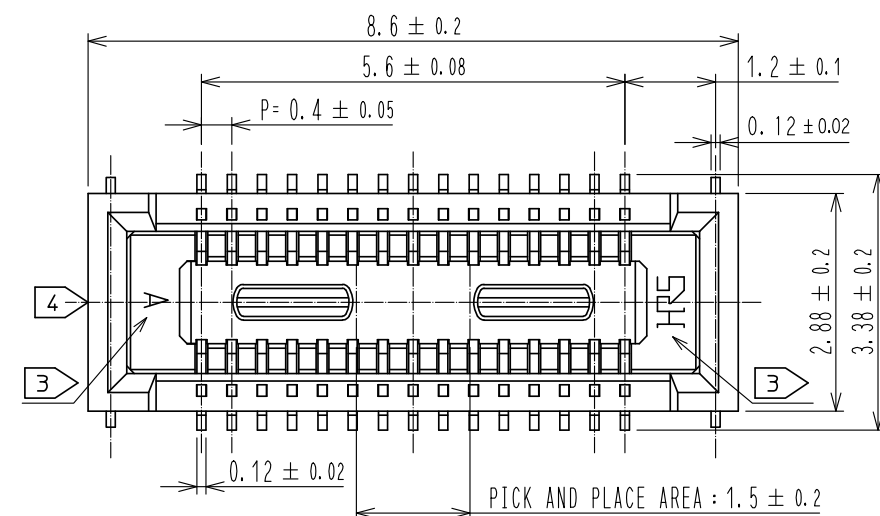


Dec.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

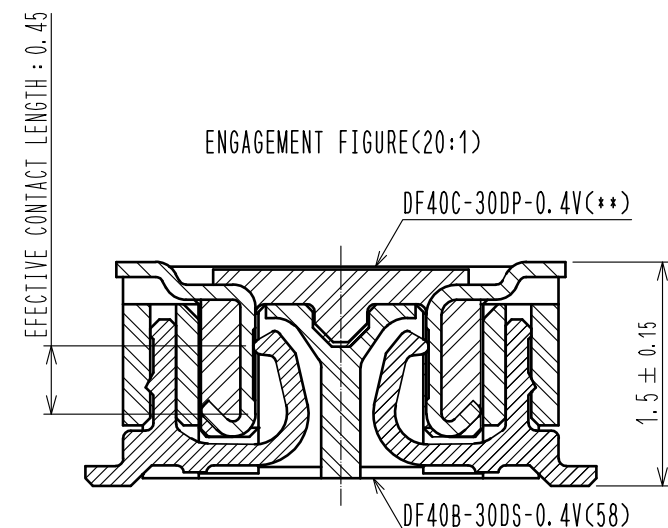


RECOMMENDED METAL MASK THICKNESS: $120 \mu\text{m}$
RECOMMENDED MASK OPENING RATIO: 80% FOR LEAD PAD

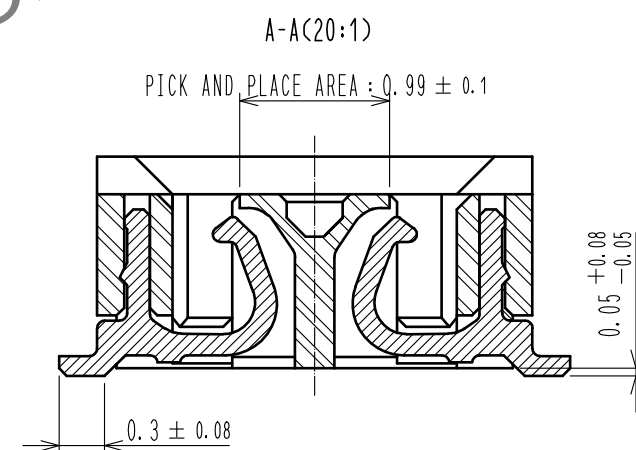

- NOTES) 1. ALL LEADS METAL FITTINGS CO-PLANARITY SHALL BE 0.1mm MAX.
2. IS NO PATTERN AREA OTHER THAN THE SAME CIRCUIT.
3. HRS MARK AND CAV NO. IS INDICATED IN APPROXIMAL POSITION SHOWN.
4. GATE POSITION IS POSITIONED IN APPROXIMAL AREA SHOWN.

			7	PS	CLEAR, REINFORCEMENT COLLAR
			6	PS	BLACK
2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.05μm MIN	5	POLYESTER	CLEAR, COVER TAPE
		SMT LEAD:GOLD 0.05μm MIN	4	PS	CLEAR, EMBOSSED CARRIER TAPE
		UNDERPLATING:NICKEL 1μm MIN	3	PHOSPHOR BRONZE	GOLD 0.05μm MIN
1	LCP	BLACK, UL94V-0			UNDERPLATING:NICKEL 1μm MIN
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS

UNITS mm		SCALE 10 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED :WR. FUKUCHI		20191219	DRAWING NO.	EDC-316874-58-00		
		CHECKED :TS. MIYAZAKI		20191219	PART NO.	DF40B-30DS-0.4V(58)		
		DESIGNED :RH. KAGAMI		20191219	CODE NO.	CL684-4090-8-58		
		DRAWN :RH. KAGAMI		20191219			 1/2	

Dec.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

