



Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

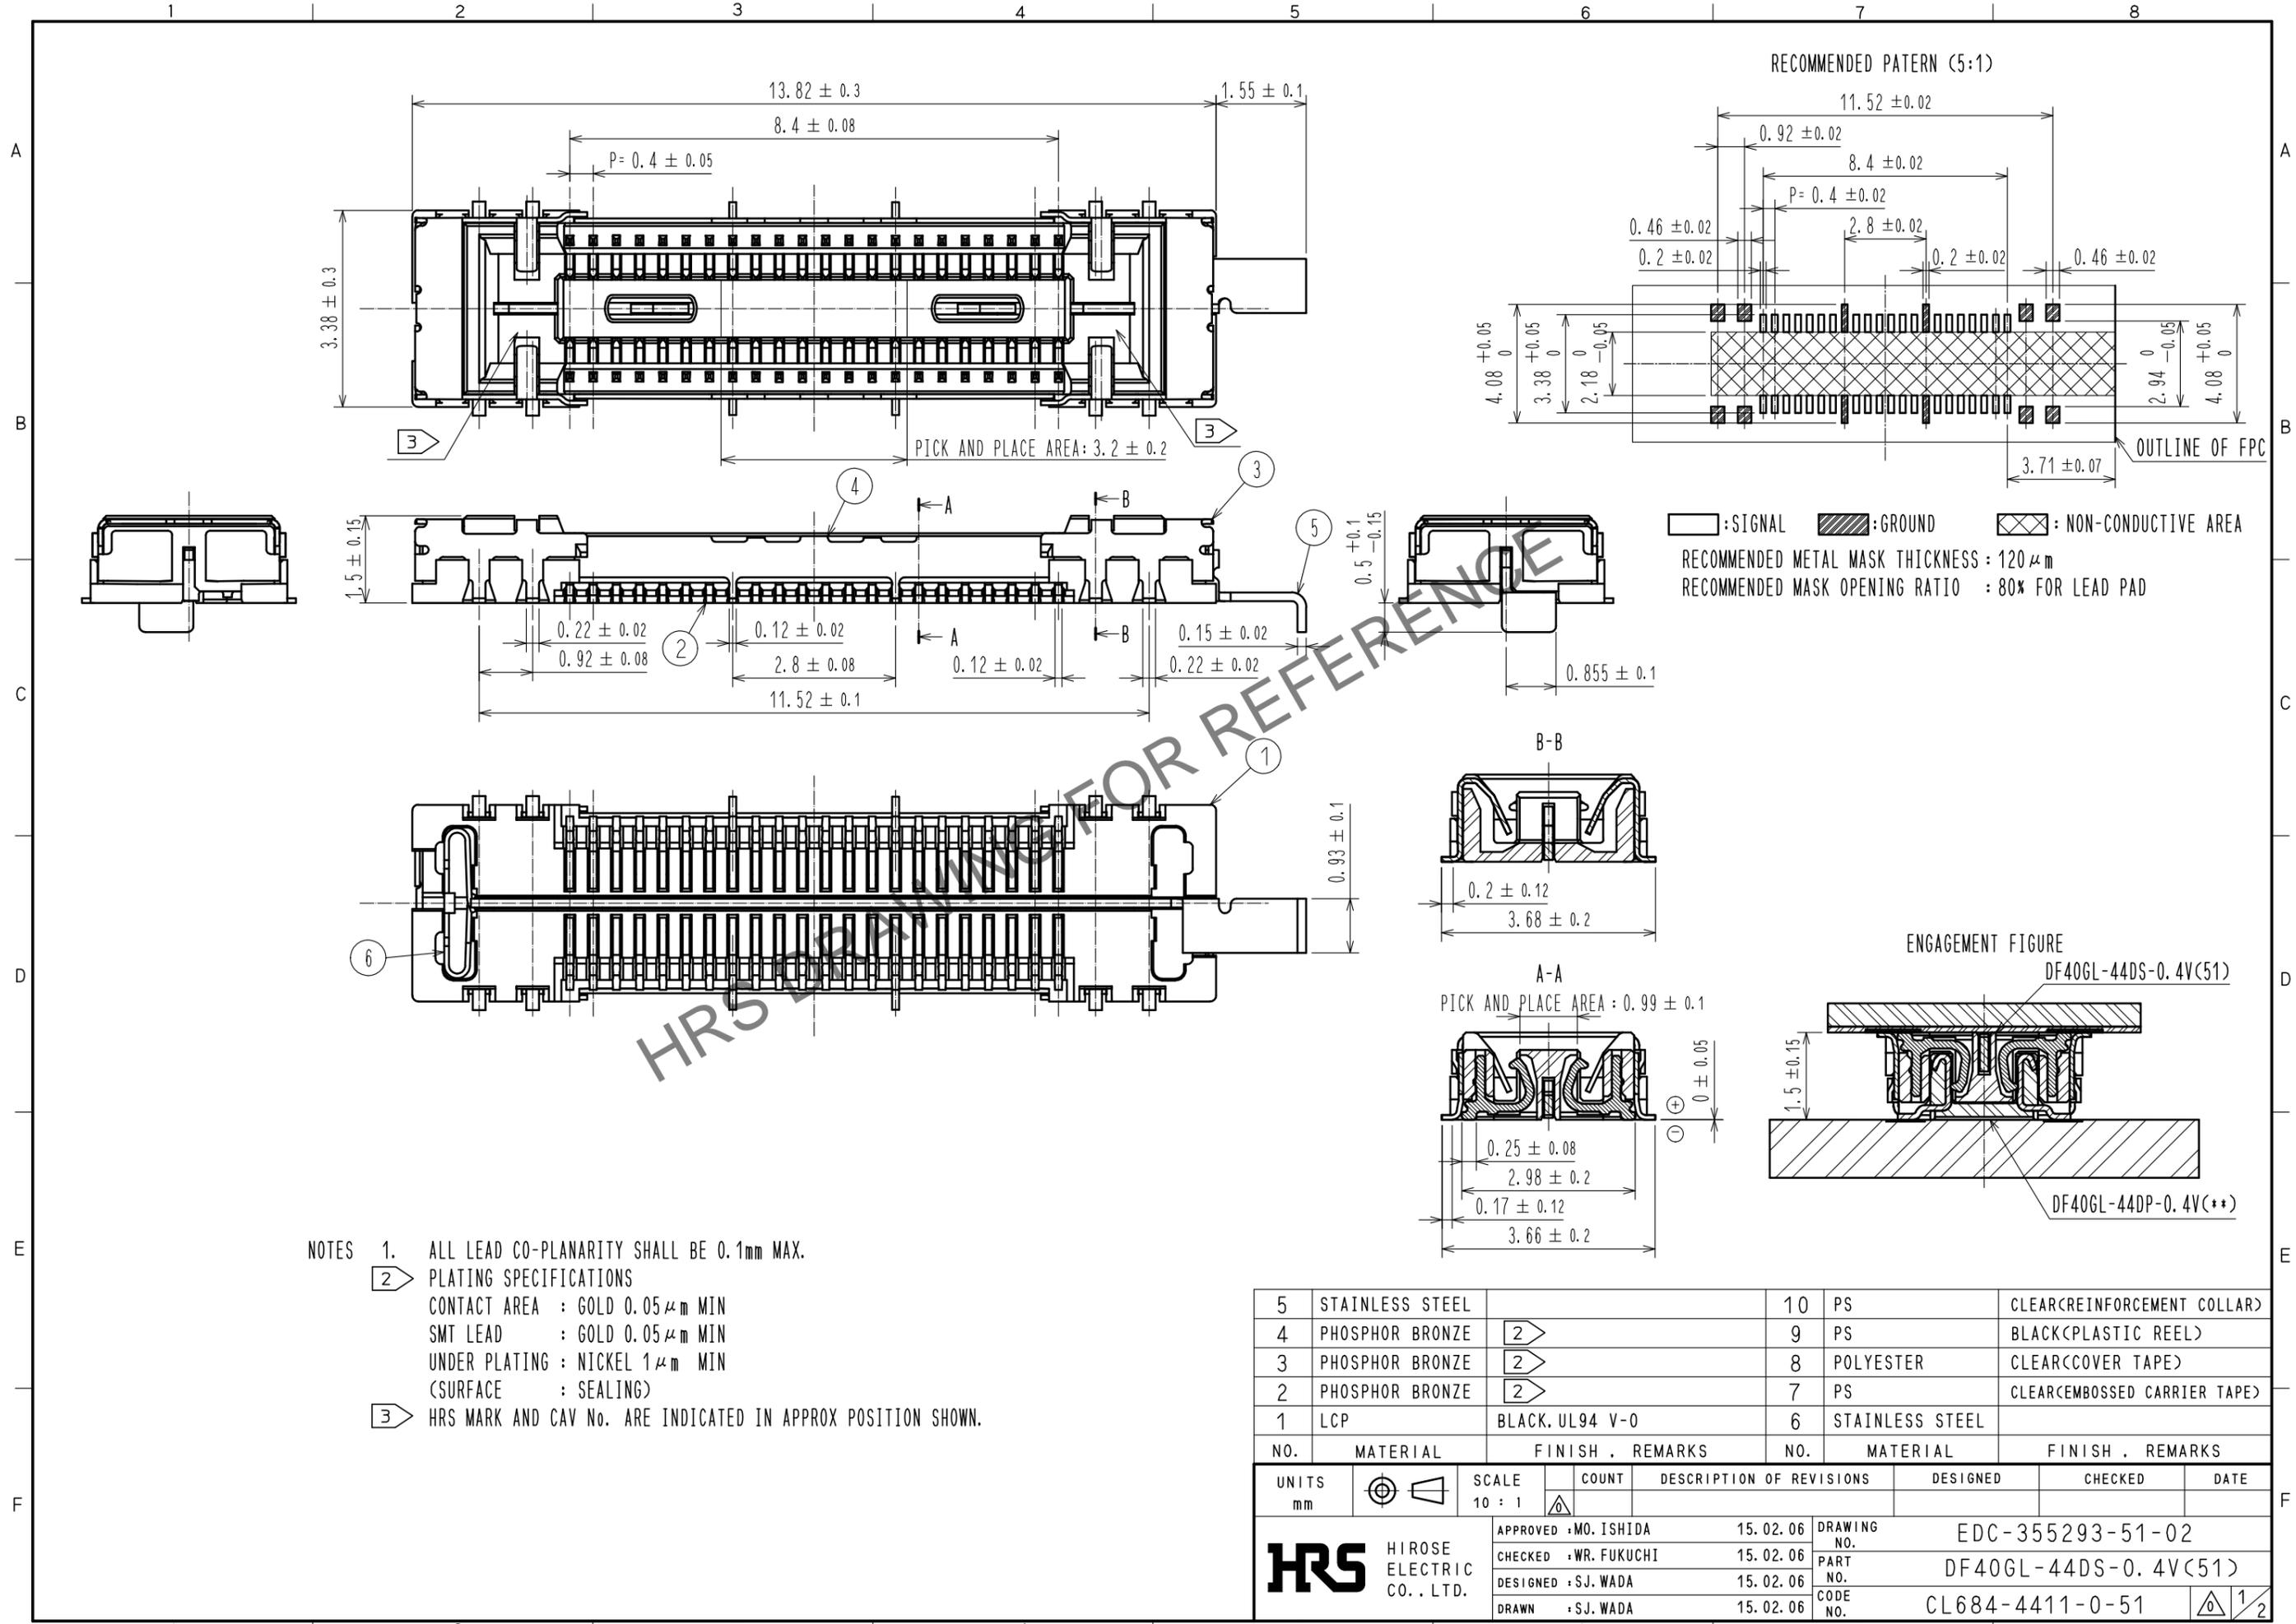

- NOTES
1. ALL LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
 2. PLATING SPECIFICATIONS
CONTACT AREA : GOLD 0.05 μm MIN
SMT LEAD : GOLD 0.05 μm MIN
UNDER PLATING : NICKEL 1 μm MIN
(SURFACE : SEALING)
 3. HRS MARK AND CAV No. ARE INDICATED IN APPROX POSITION SHOWN.

5	STAINLESS STEEL		10	PS	CLEAR(REINFORCEMENT COLLAR)
4	PHOSPHOR BRONZE	2	9	PS	BLACK(PLASTIC REEL)
3	PHOSPHOR BRONZE	2	8	POLYESTER	CLEAR(COVER TAPE)
2	PHOSPHOR BRONZE	2	7	PS	CLEAR(EMBOSSED CARRIER TAPE)
1	LCP	BLACK, UL94 V-0	6	STAINLESS STEEL	
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS		SCALE	COUNT	DESCRIPTION OF REVISIONS	
mm		10 : 1	△	DESIGNED	CHECKED
HIROSE ELECTRIC CO., LTD.		APPROVED : MO. ISHIDA	15.02.06	DRAWING NO. EDC-355293-51-02	
		CHECKED : WR. FUKUCHI	15.02.06	PART NO. DF40GL-44DS-0.4V(51)	
		DESIGNED : SJ. WADA	15.02.06	CODE NO. CL684-4411-0-51	
		DRAWN : SJ. WADA	15.02.06	1/2	

Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

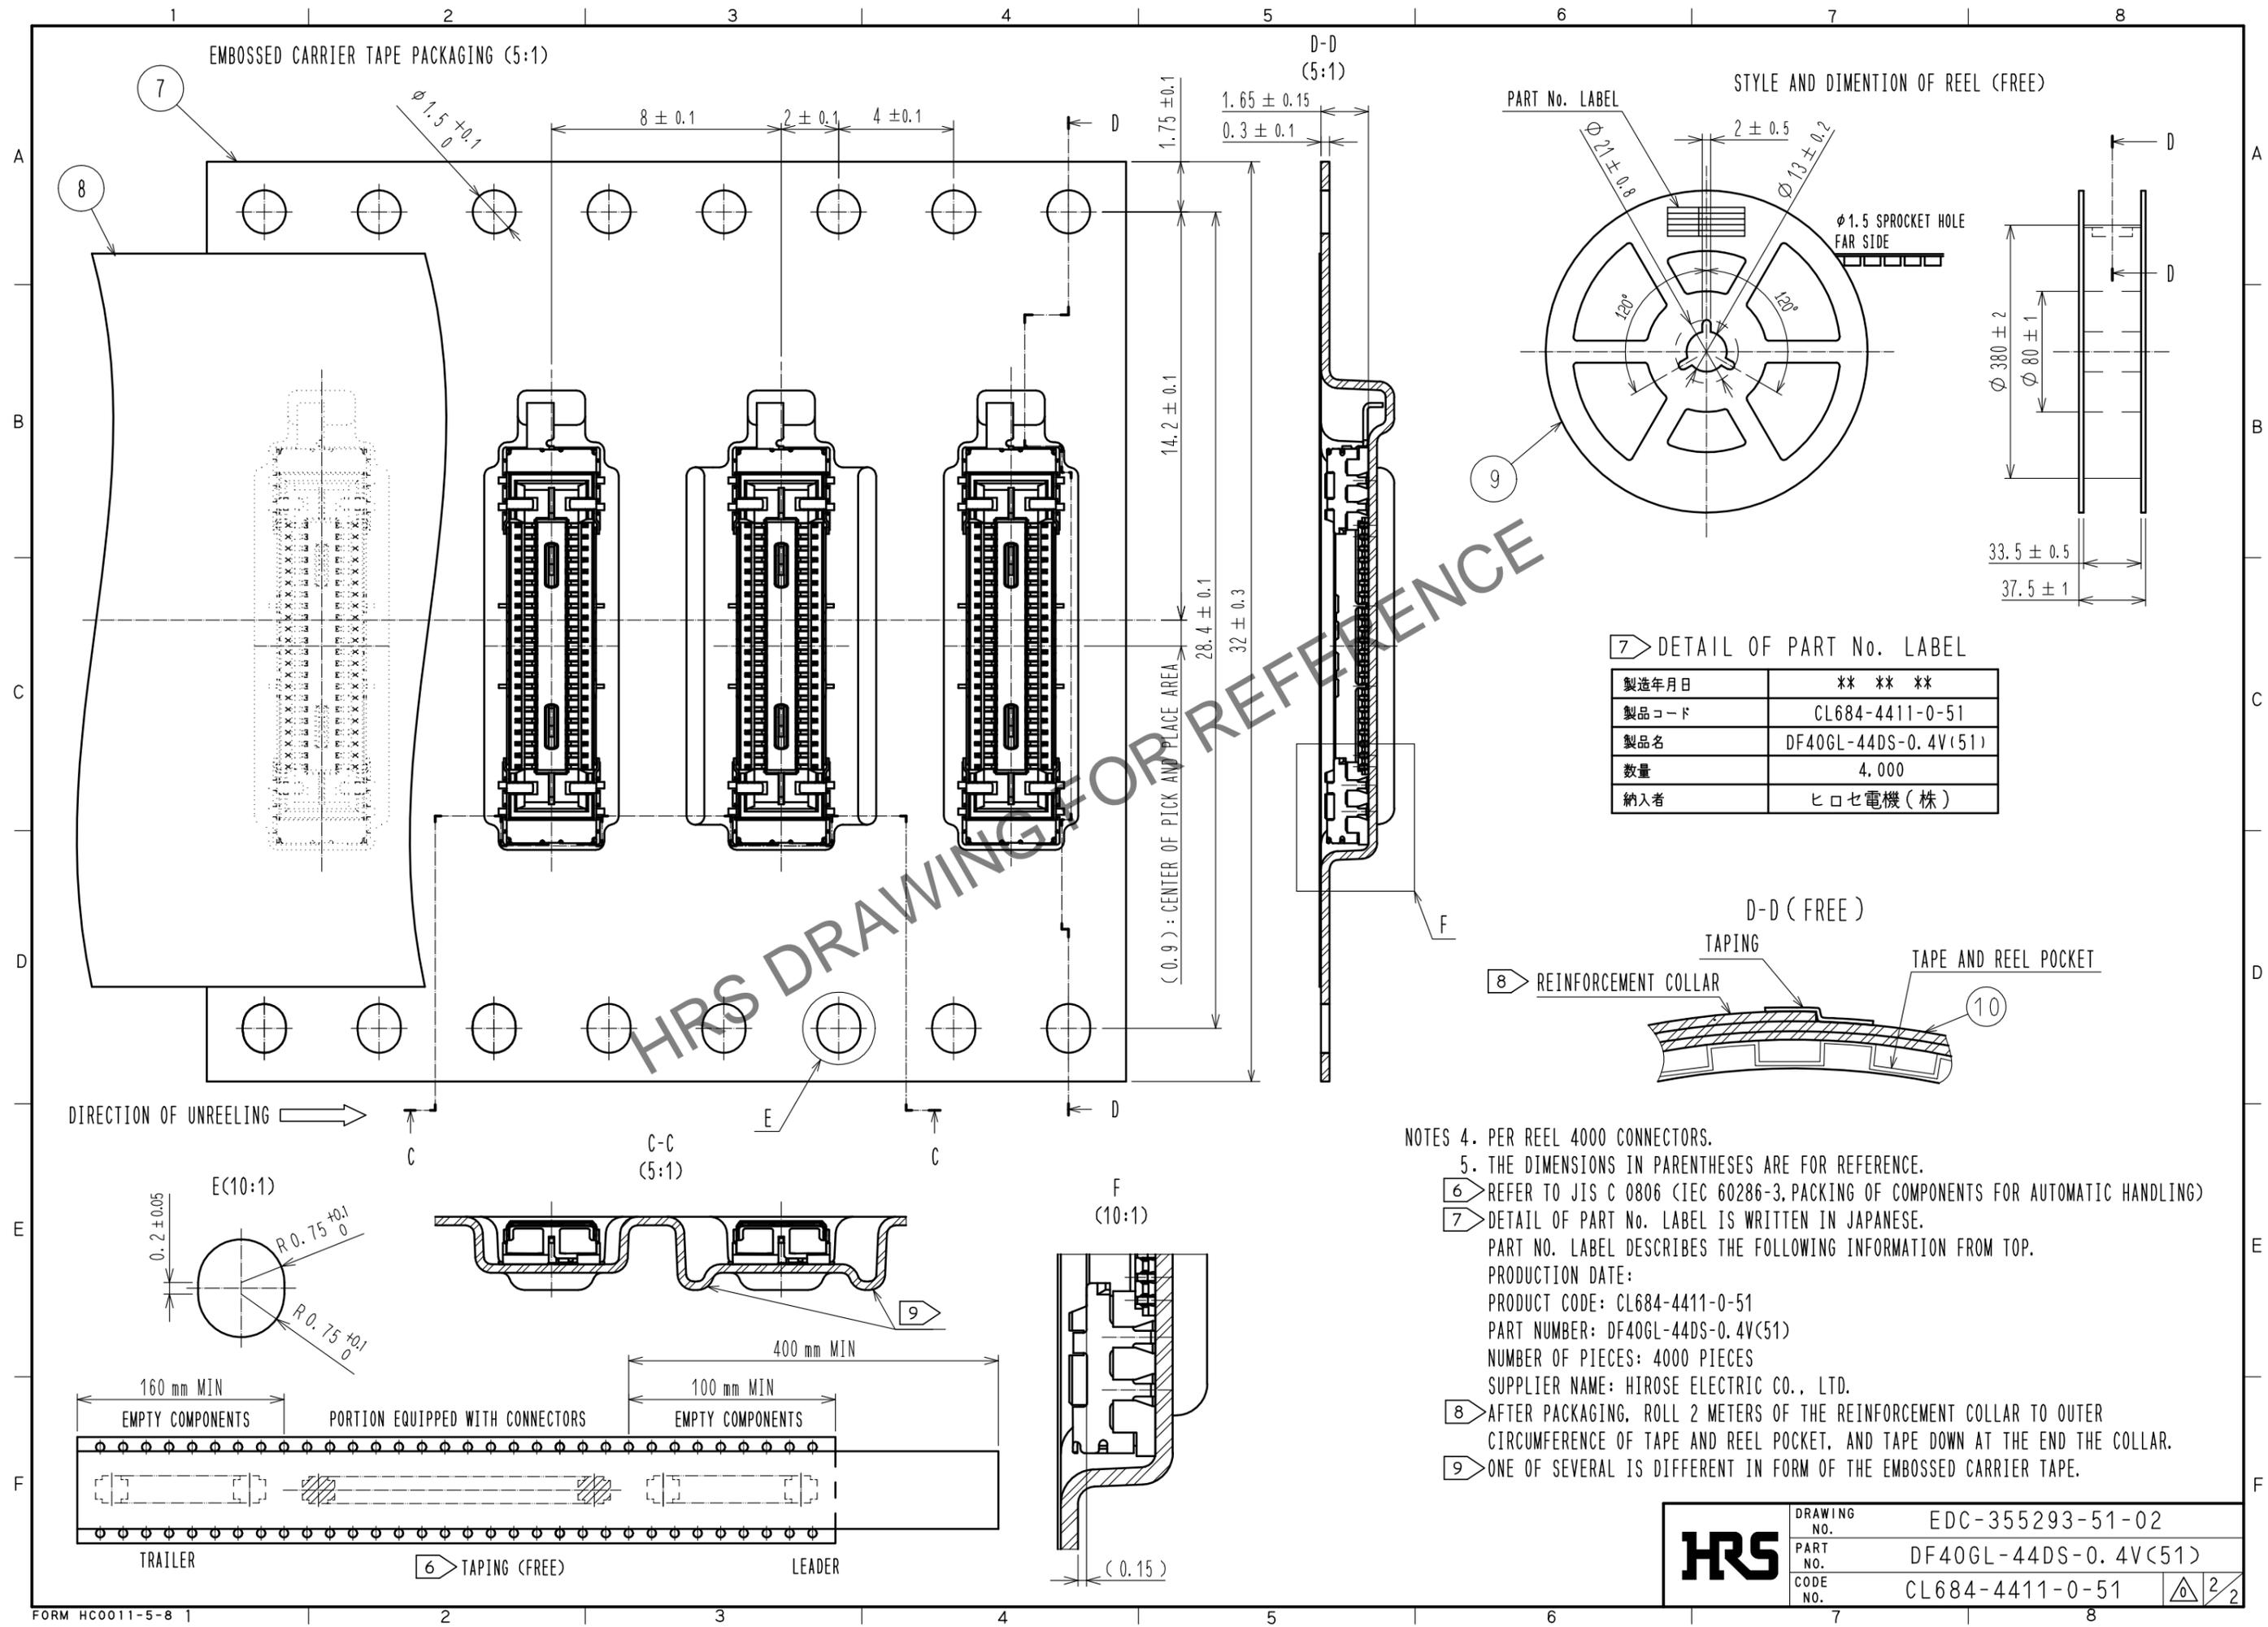

HRS	DRAWING NO.	EDC-355293-51-02
	PART NO.	DF40GL-44DS-0.4V(51)
	CODE NO.	CL684-4411-0-51
		2/2