




- NOTES
- ALL LEADS CO-PLANARITY SHALL BE 0.1mm MAX.
 - EACH ONE CONTACT AT 4 CORNERS SHALL BE METAL HOLD DOWN.
 - HRS MARK AND CAV NO. ARE LOCATED IN APPROXIMAL AREA.
 - THERE IS A POSSIBILITY THAT THE RESIN WILL BE EXPOSED AT THIS AREA. BUT THIS WILL NOT AFFECT THE CONTACT RELIABILITY.

2	COPPER ALLOY	CONTACT AREA: GOLD $0.05 \mu\text{m}$ MIN	6	PS	CLEAR, REINFORCEMENT COLLAR
		SMT LEAD: GOLD $0.05 \mu\text{m}$ MIN	5	PS	BLACK, PLASTIC REEL
		UNDERPLATING: NICKEL $1 \mu\text{m}$ MIN	4	POLYESTER	CLEAR, COVER TAPE
1	LCP	BLACK, UL94V-0	3	PS	CLEAR, EMBOSSED CARRIER TAPE
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 10 : 1	COUNT 	DESCRIPTION OF REVISIONS	
HIROSE ELECTRIC CO., LTD.		APPROVED : WR. FUKUCHI	20210303	DRAWING NO.	EDC-386695-58-00
		CHECKED : TS. MIYAZAKI	20210303	PART NO.	DF40TC-40DP-0.4V(58)
		DESIGNED : YK. SATAKE	20210303	CODE NO.	CL0684-4264-0-58
		DRAWN : YK. SATAKE	20210303		

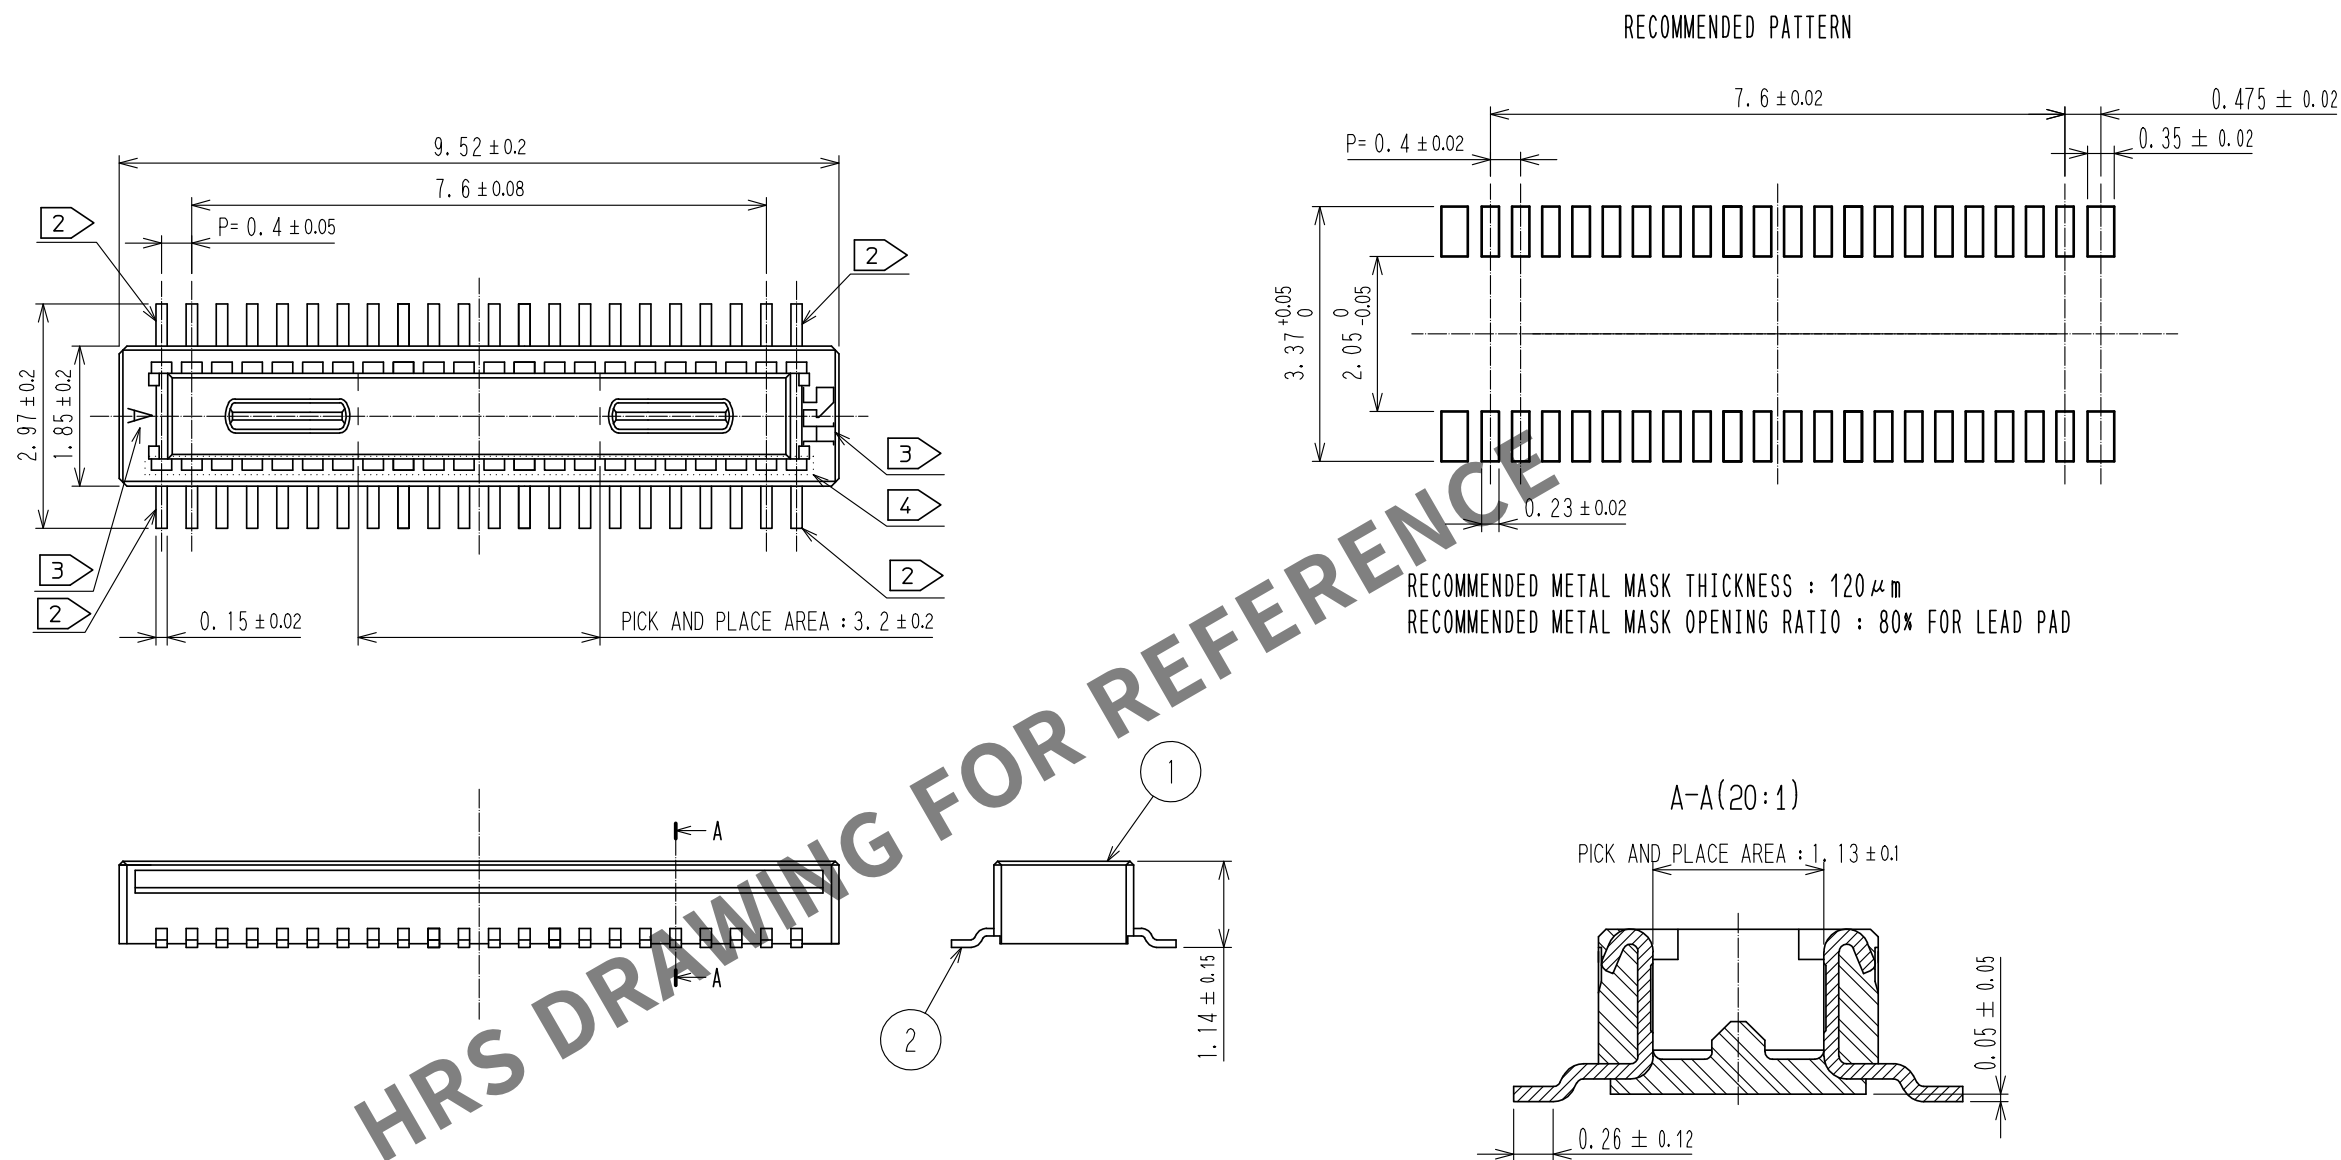