

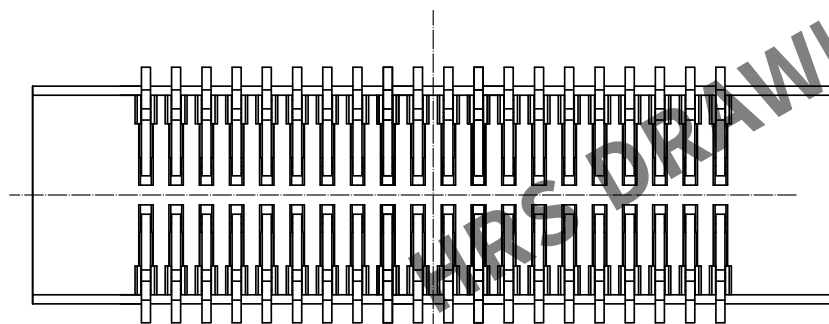
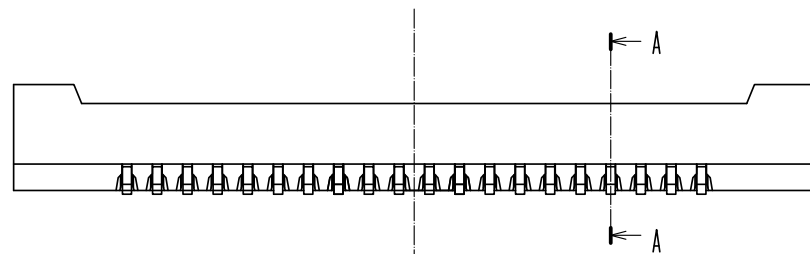




Sep.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

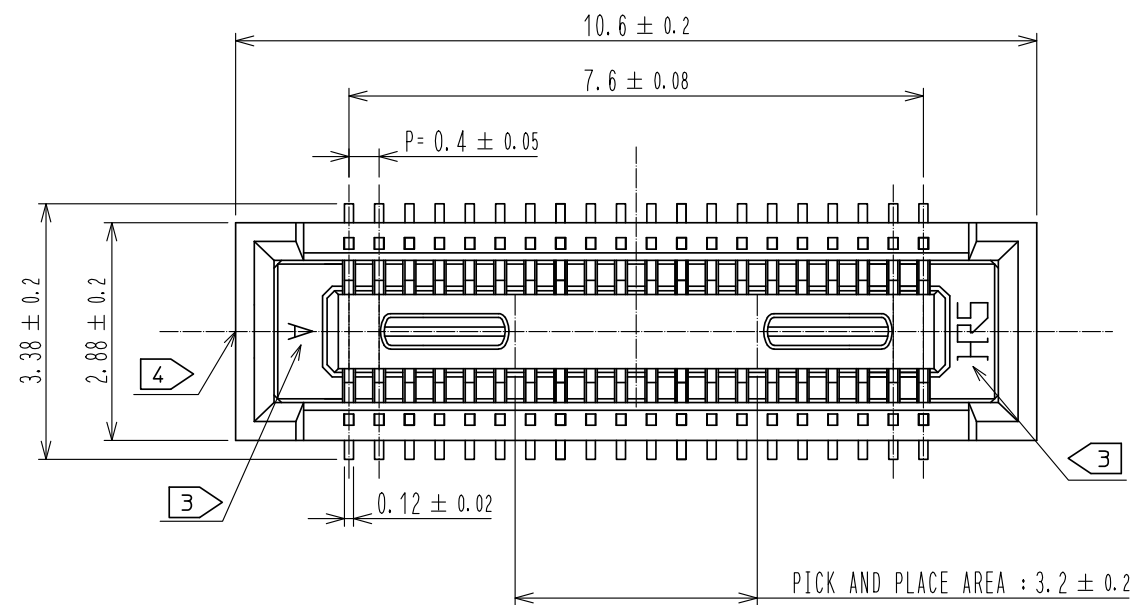


- NOTES)
- ALL LEADS METAL FITTINGS CO-PLANARITY SHALL BE 0.1mm MAX.
 - IS NO PATTERN AREA OTHER THAN THE SAME CIRCUIT.
 - HRS MARK AND CAV NO. ARE INDICATED IN APPROXIMAL POSITION SHOWN.
 - GATE IS LOCATED IN APPROXIMAL AREA.

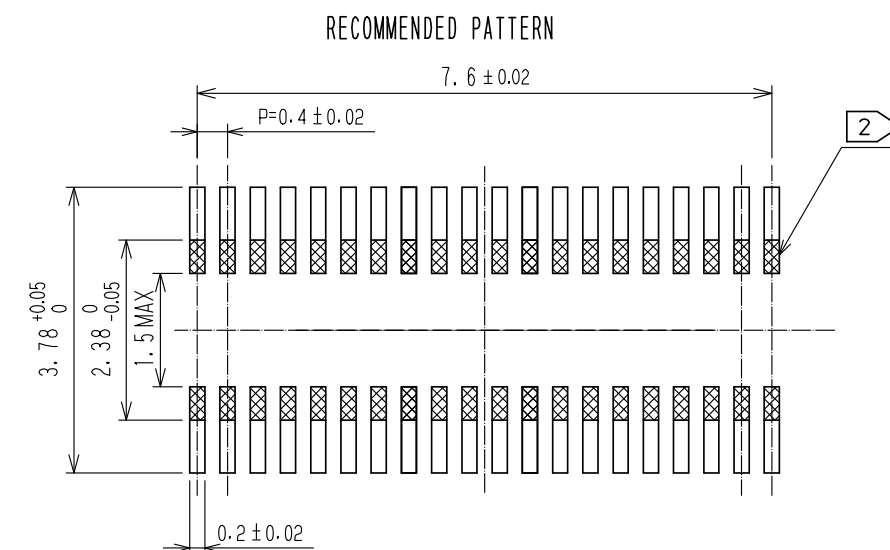

RECOMMENDED METAL MASK THICKNESS: $120 \mu\text{m}$
RECOMMENDED MASK OPENING RATIO: 80% FOR LEAD PAD



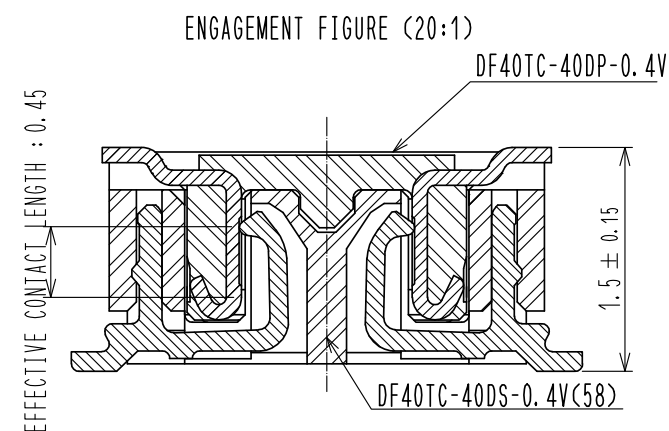
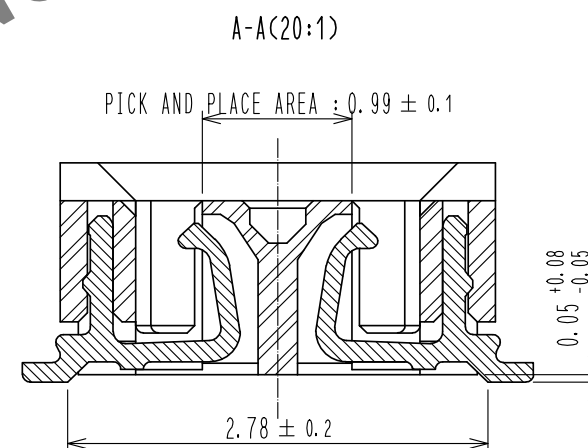


2	COPPER ALLOY	CONTACT AREA:GOLD 0.05μm MIN	6	PS	CLEAR, REINFORCEMENT COLLAR			
		SMT LEAD:GOLD 0.05μm MIN	5	PS	BLACK, PLASTIC REEL			
		UNDERPLATING:NICKEL 1μm MIN	4	POLYESTER	CLEAR, COVER TAPE			
1	LCP	BLACK, UL94V-0	3	PS	CLEAR, EMBOSSED CARRIER TAPE			
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS			
UNITS mm		SCALE 10 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
	HIROSE ELECTRIC CO., LTD.	APPROVED :WR. FUKUCHI	20210303	DRAWING NO.	EDC-388249-58-00			
		CHECED :TS. MIYAZAKI	20210303	PART NO.	DF40TC-40DS-0.4V(58)			
		DESIGNED :YK. SATAKE	20210303	CODE NO.	CL0684-4272-0-58			
		DRAWN :YK. SATAKE	20210303	 				

Sep.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

EMBOSSED CARRIER TAPE PACKAGING (5:1)

STYLE AND DIMENSION OF REEL(FREE)

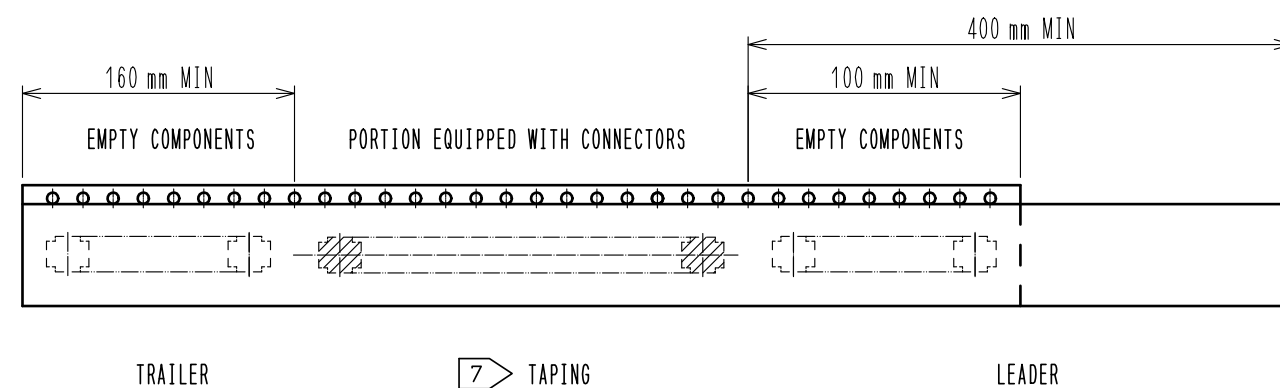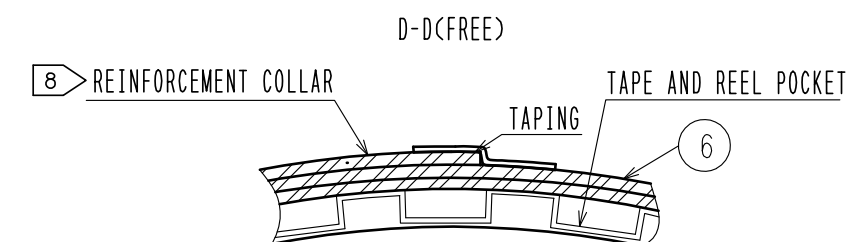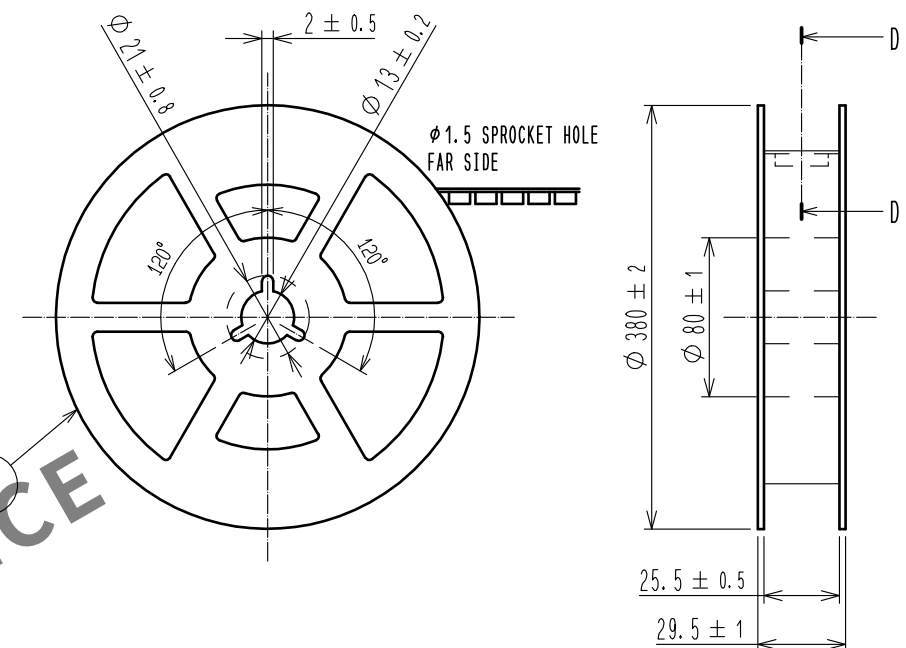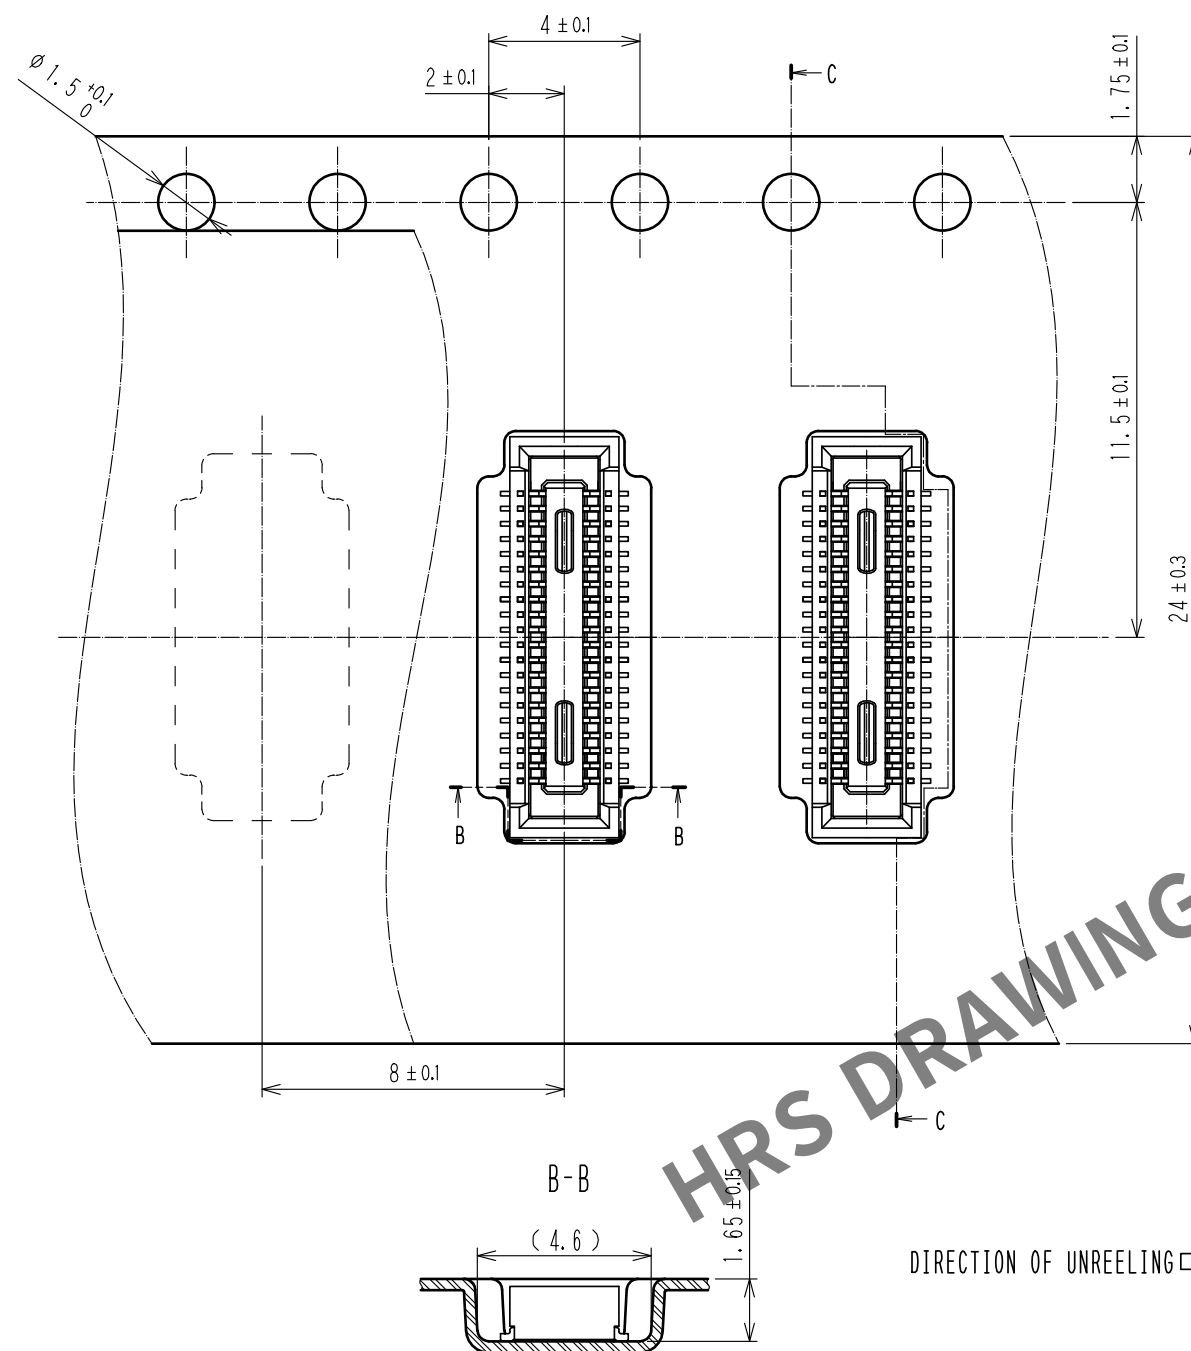

- NOTES
5. PER REEL 1000 CONNECTORS.
 6. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
 7. REFER TO JIS C 0806, IEC 60286-3 (PACKING OF COMPONENTS FOR AUTOMATIC HANDLING)
 8. AFTER PACKAGING, ROLL 2 METERS OF THE REINFORCEMENT COLLAR TO OUTER CIRCUMFERENCE OF TAPE AND REEL POCKET. AND TAPE DOWN AT THE END THE COLLAR.

HRS

DRAWING NO.	EDC-388249-58-00
PART NO.	DF40TC-40DS-0.4V(58)
CODE NO.	CL0684-4272-0-58

2/2