

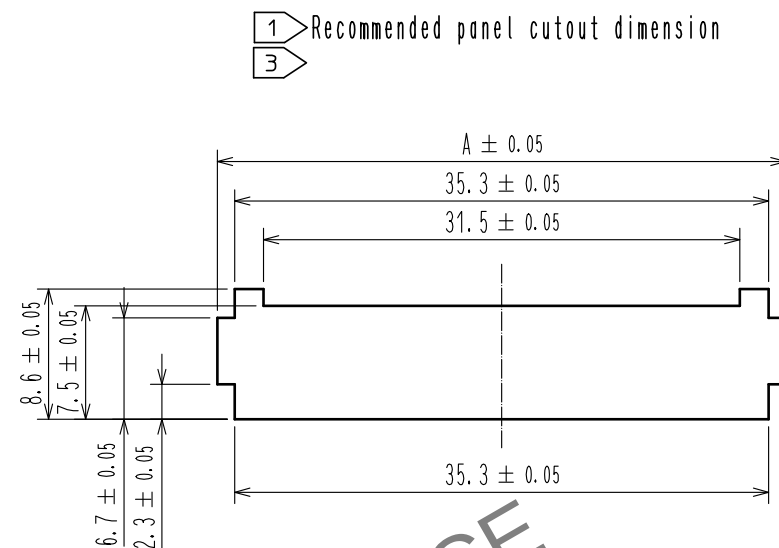
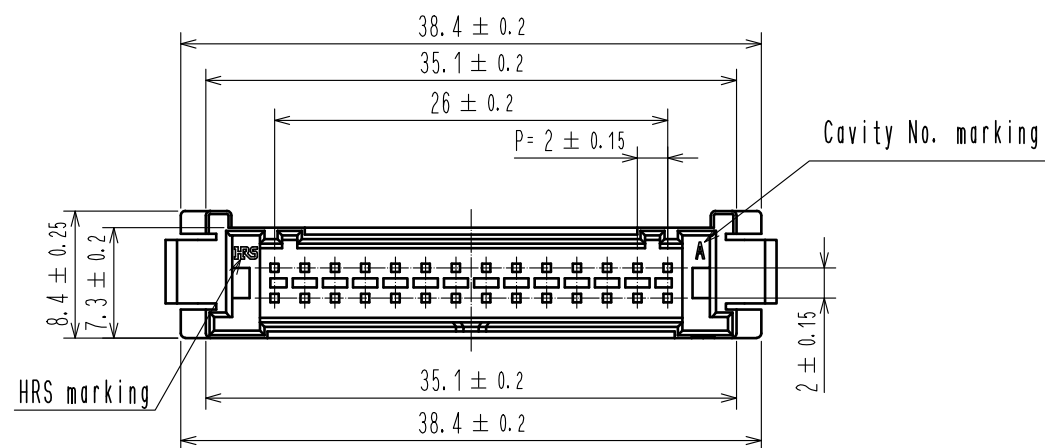
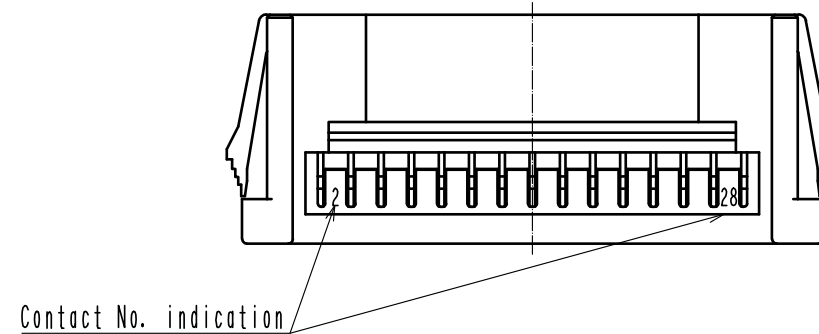


Dec.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



Panel thickness	A
0.5~0.8	37.6
0.9~1.3	38.1
1.4~1.8	38.5
1.9~2.3	38.9

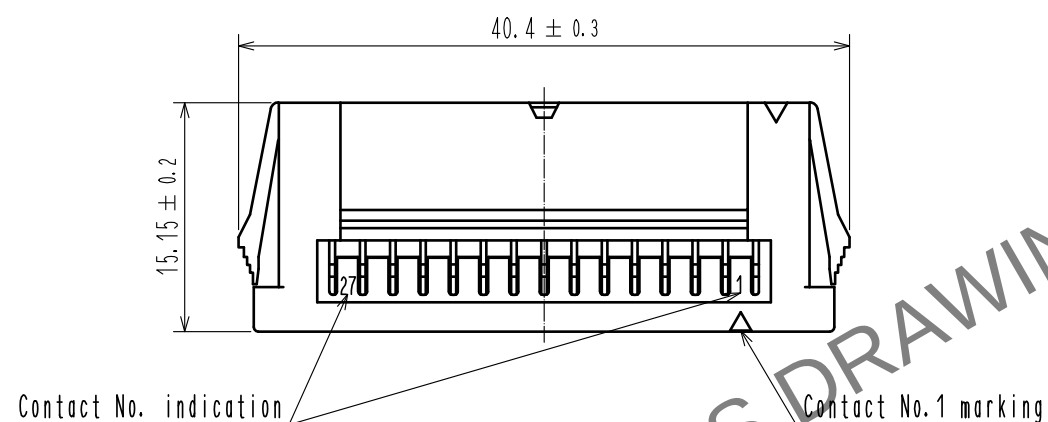

- Note
- 1 Please use non-radius side for the panel hooking area.
 - 2 Applicable panel thicknessing is 2.3 to 0.5 mm.
 - 3 Consult hirose for the other panel cutout designs than recommended one.
 4. Per pack : 100 pieces.
 5. UL(File No.E52653),
C-UL(File No.E52653) authorization article



NO.				1			
MATERIAL				PBT			
FINISH . REMARKS				UL94V-0. BLACK			
UNITS		SCALE	COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED
mm		2 : 1	1	DIS-H-00004547		TS.MIYAKI	SZ.ONO
				APPROVED : HS. OKAWA		20160601	
				CHECKED : YN. TAKASHITA		20160601	
				DESIGNED : TT. OHSAKO		20160601	
				DRAWN : TT. OHSAKO		20160601	
				DRAWING NO.		EDC-366294-00-00	
				PART NO.		DF51-28DEP-2C	
				CODE NO.		CL543-5083-0-00	
						1/1	