


Oct.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

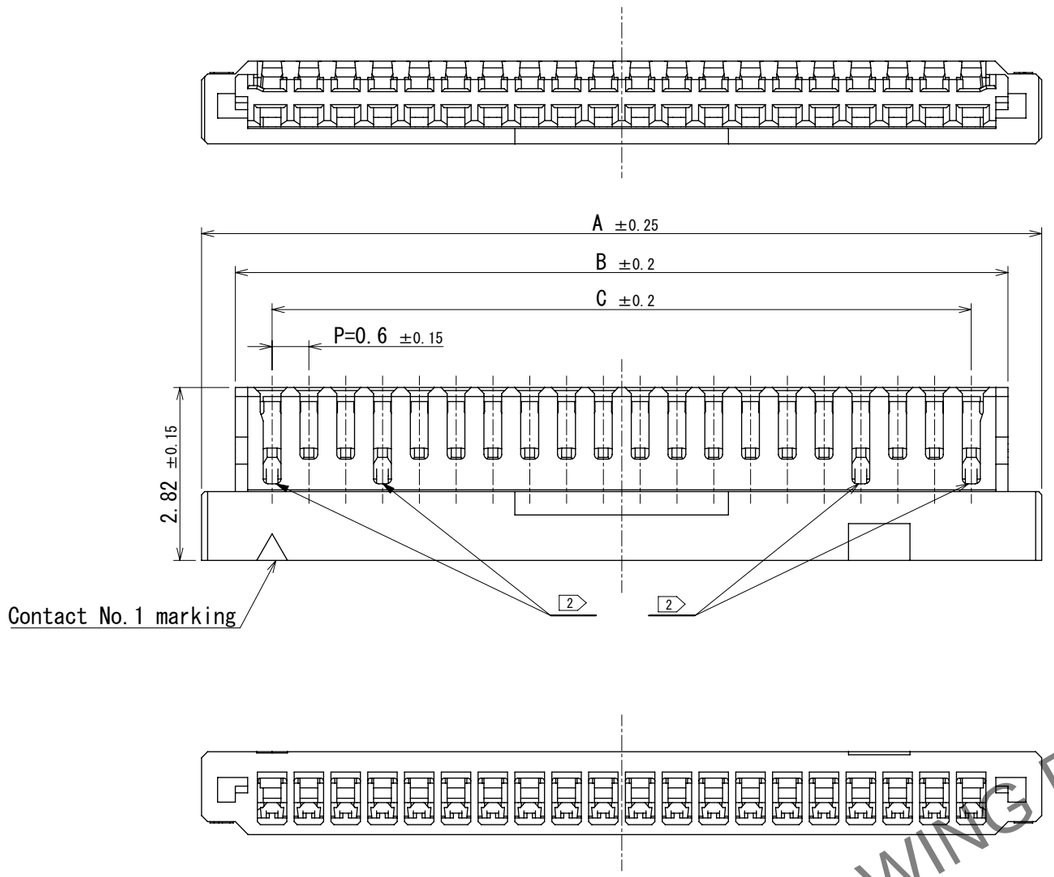



Part No.	Code No.	A	B	C
DF53-2P-0.6C	CL0668-1013-0-00	2.9	1.8	0.6
DF53-3P-0.6C	CL0668-1014-0-00	3.5	2.4	1.2
DF53-4P-0.6C	CL0668-1015-0-00	4.1	3.0	1.8
DF53-5P-0.6C	CL0668-1016-0-00	4.7	3.6	2.4
DF53-6P-0.6C	CL0668-1017-0-00	5.3	4.2	3.0
DF53-8P-0.6C	CL0668-1018-0-00	6.5	5.4	4.2
DF53-10P-0.6C	CL0668-1019-0-00	7.7	6.6	5.4
DF53-12P-0.6C	CL0668-1020-0-00	8.9	7.8	6.6
DF53-14P-0.6C	CL0668-1021-0-00	10.1	9.0	7.8
DF53-16P-0.6C	CL0668-1022-0-00	11.3	10.2	9.0
DF53-18P-0.6C	CL0668-1023-0-00	12.5	11.4	10.2
DF53-20P-0.6C	CL0668-1024-0-00	13.7	12.6	11.4

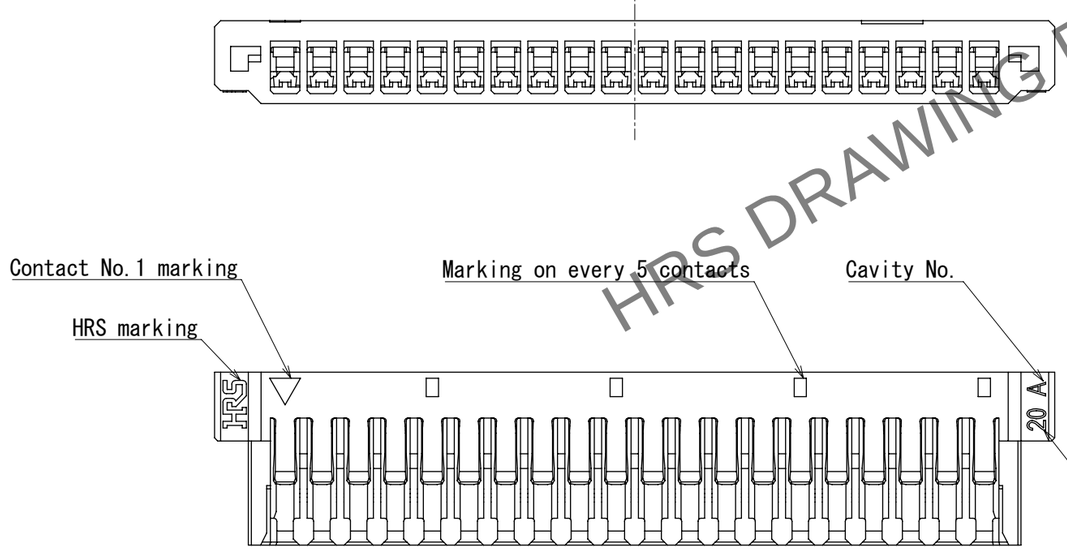

HRS DRAWING FOR REFERENCE

注 1. Per pack:100 picies.
2. A number of slits varies depending on pin count.
・2 slits for 2 to 12 pos.(No.1, No.N)
・4 slits for 14 to 20 pos.(No.1,No.4, No.N-3, No.N)
3. This product satisfies halogen free requirements defined as 900 ppm maximum chlorine, 900 ppm maximum bromine, and 1500 ppm maximum total of cholorine and bromine.
4. Refer to the technical specification(ETAP-H1051-00) for the packing type.
5. Please make sure refer to the manuals below for operation of this product.
For cable assembly procedure ETAD-H0995-00
For operation manual ETAD-H0996-00

NO.	MATERIAL	FINISH , REMARKS
1	PA 9T	BLACK, UL94V-0

UNITS	SCALE		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	10:1	△0	0				2023.03.29

HIROSE ELECTRIC CO.,LTD.

APPROVED	SJ.OKAMURA	2024.06.21
CHECKED	SJ.OKAMURA	2024.06.21
DESIGNED	JN.TONAI	2024.06.21
DRAWN	JN.TONAI	2024.06.21

DRAWING NO.	EDCX-407144-00-00
PART NO.	DF53-P-0.6C
CODE NO.	CL0010-0636-0-00 △0 1/1