


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



- Note
1. Lead co-planarity shall be 0.1 mm MAX.
 2. Please consult HIROSE when the product is mounted to FPC.

3	Brass	Surface:tin plating 1μm MIN Under plating:nickel plating 0.5μm MIN			
2	Copper alloy	Surface:tin plating 1μm MIN Under plating:nickel plating 0.5μm MIN	6	PS	Black, Reel
			5	PET	Clear, Cover tape
1	PA 9T	Black, UL94V-0	4	PS	Clear, Embossed carrier tape
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 10: 1	COUNT	DESCRIPTION OF REVISIONS	DESIGNED
			APPROVED : HS. OKAWA	20200817	DRAWING NO. EDC-380627-00-00
			CHECKED : ST. WADA	20200817	PART NO. DF53-14S-0. 6H
			DESIGNED : TH. SATO	20200817	CODE NO. CL668-1009-0-00
			DRAWN : TH. SATO	20200817	

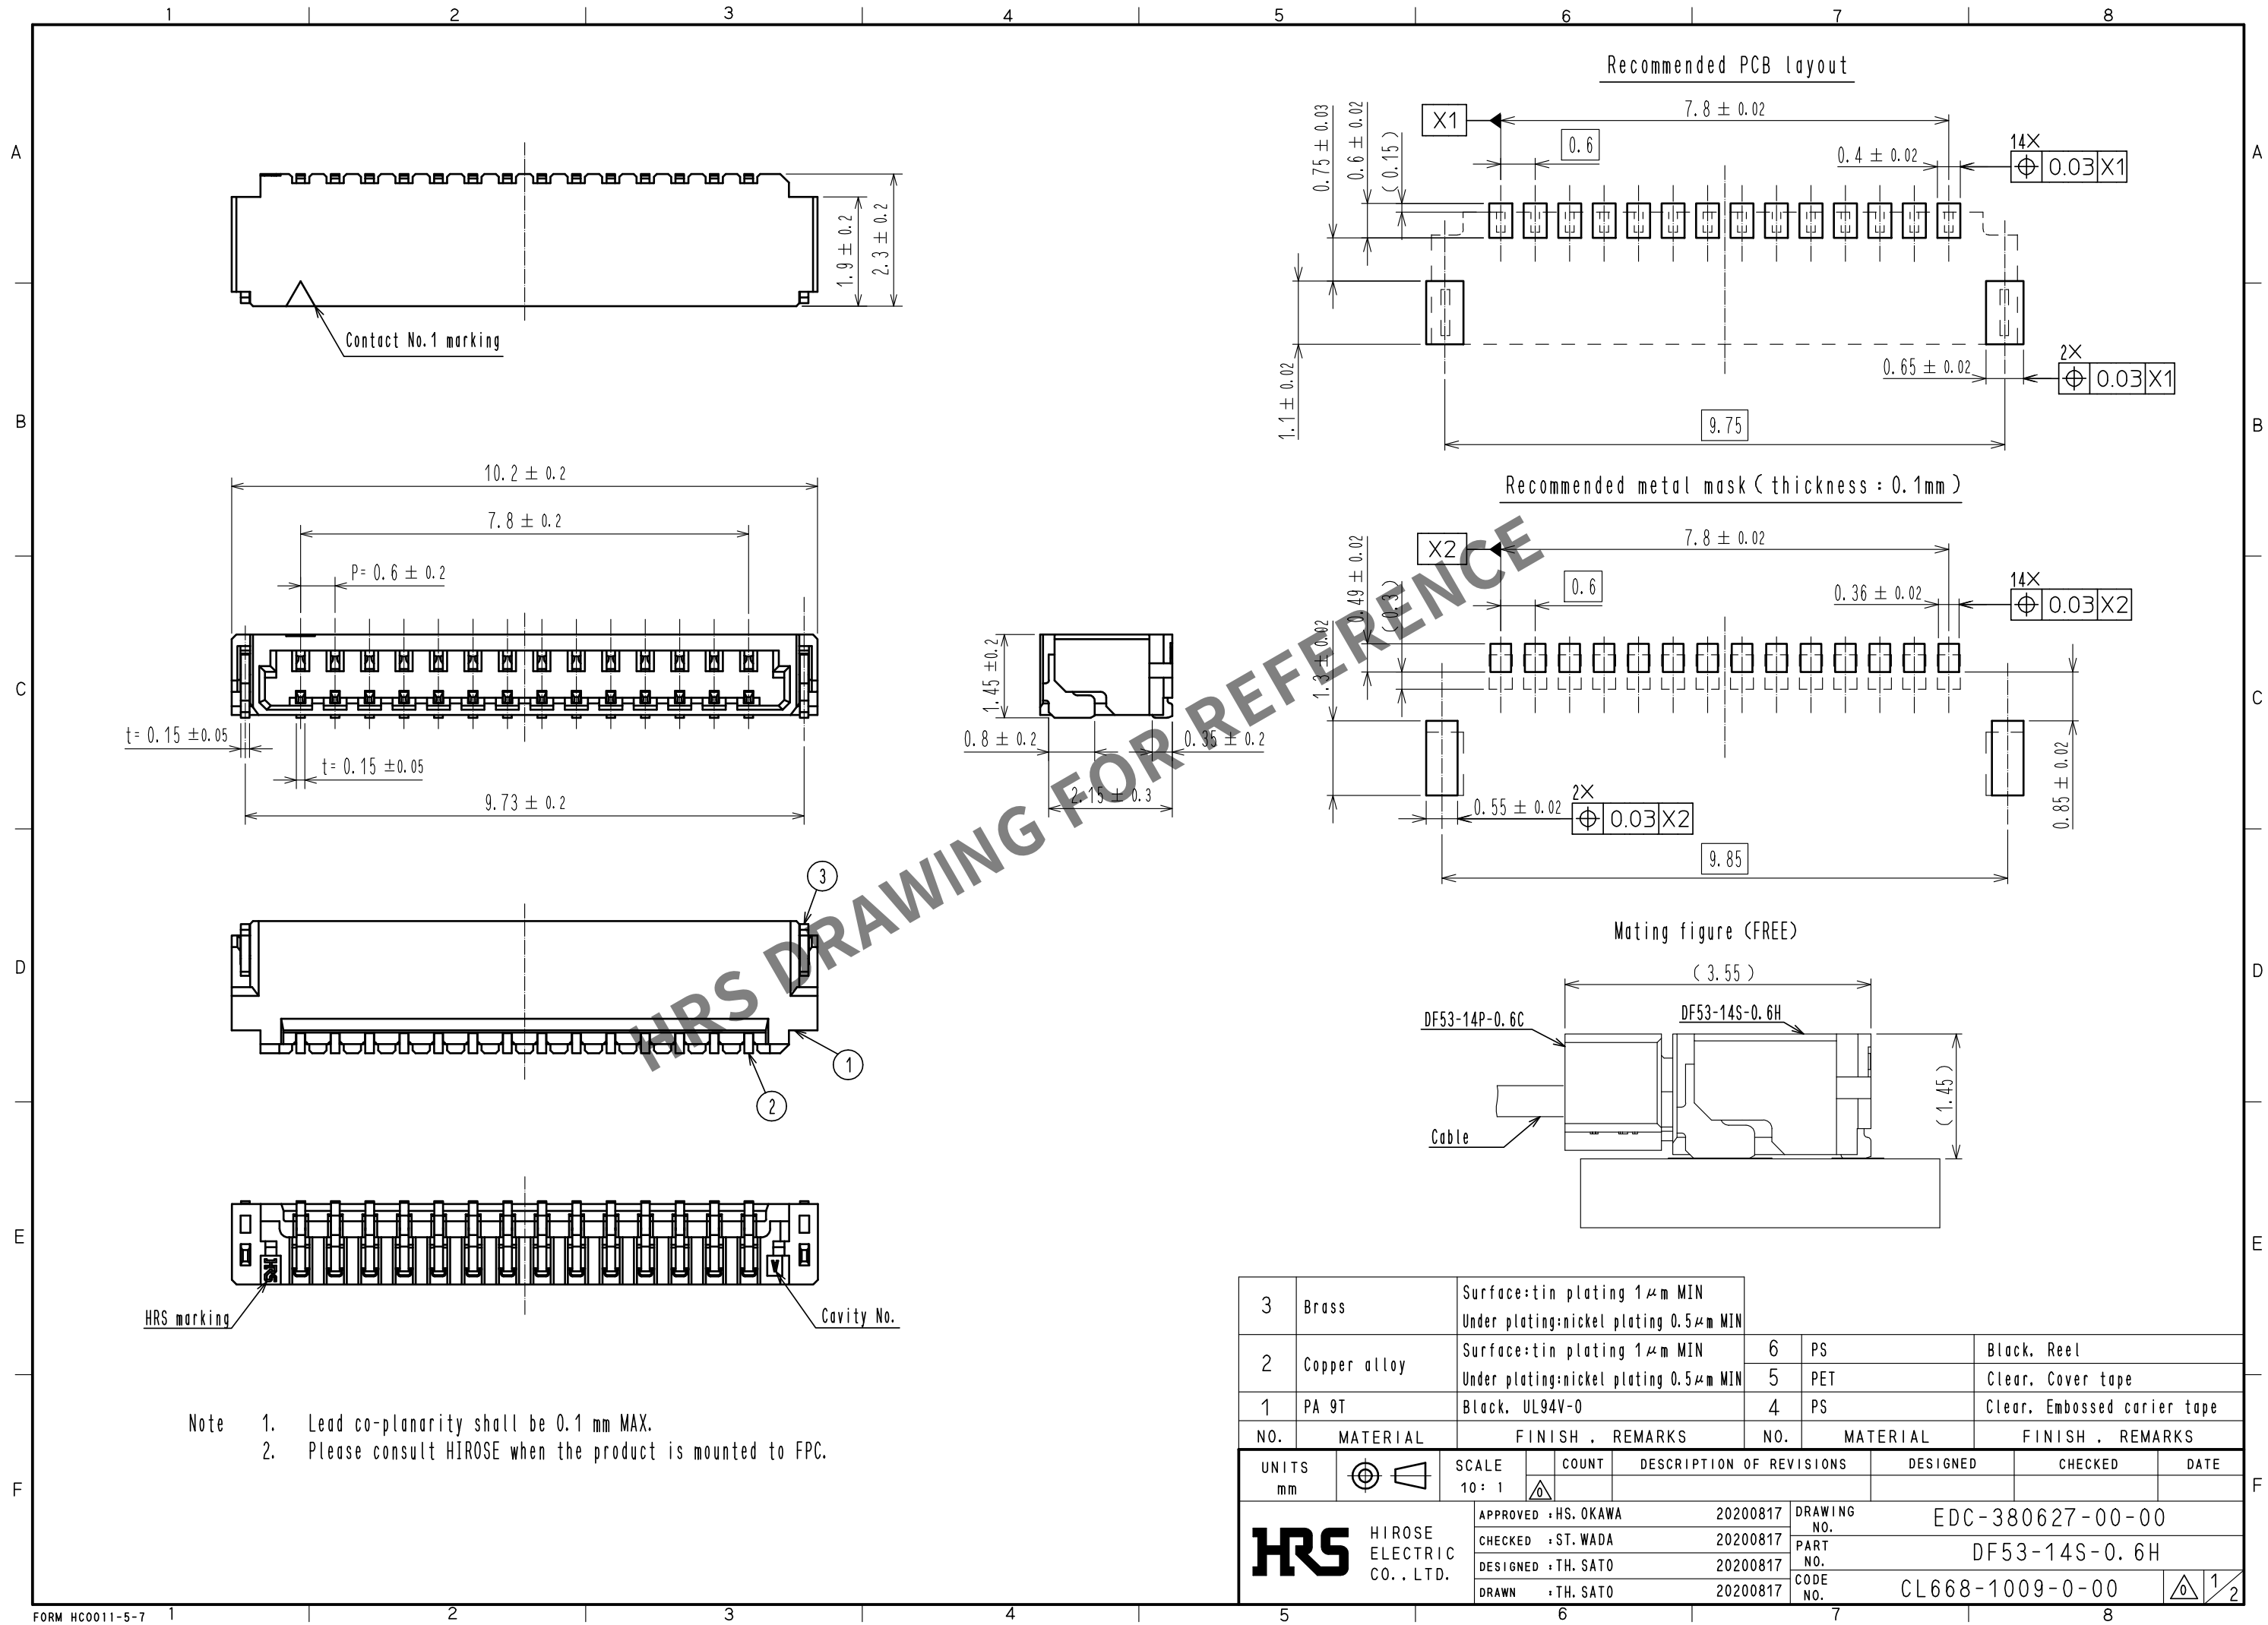