


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

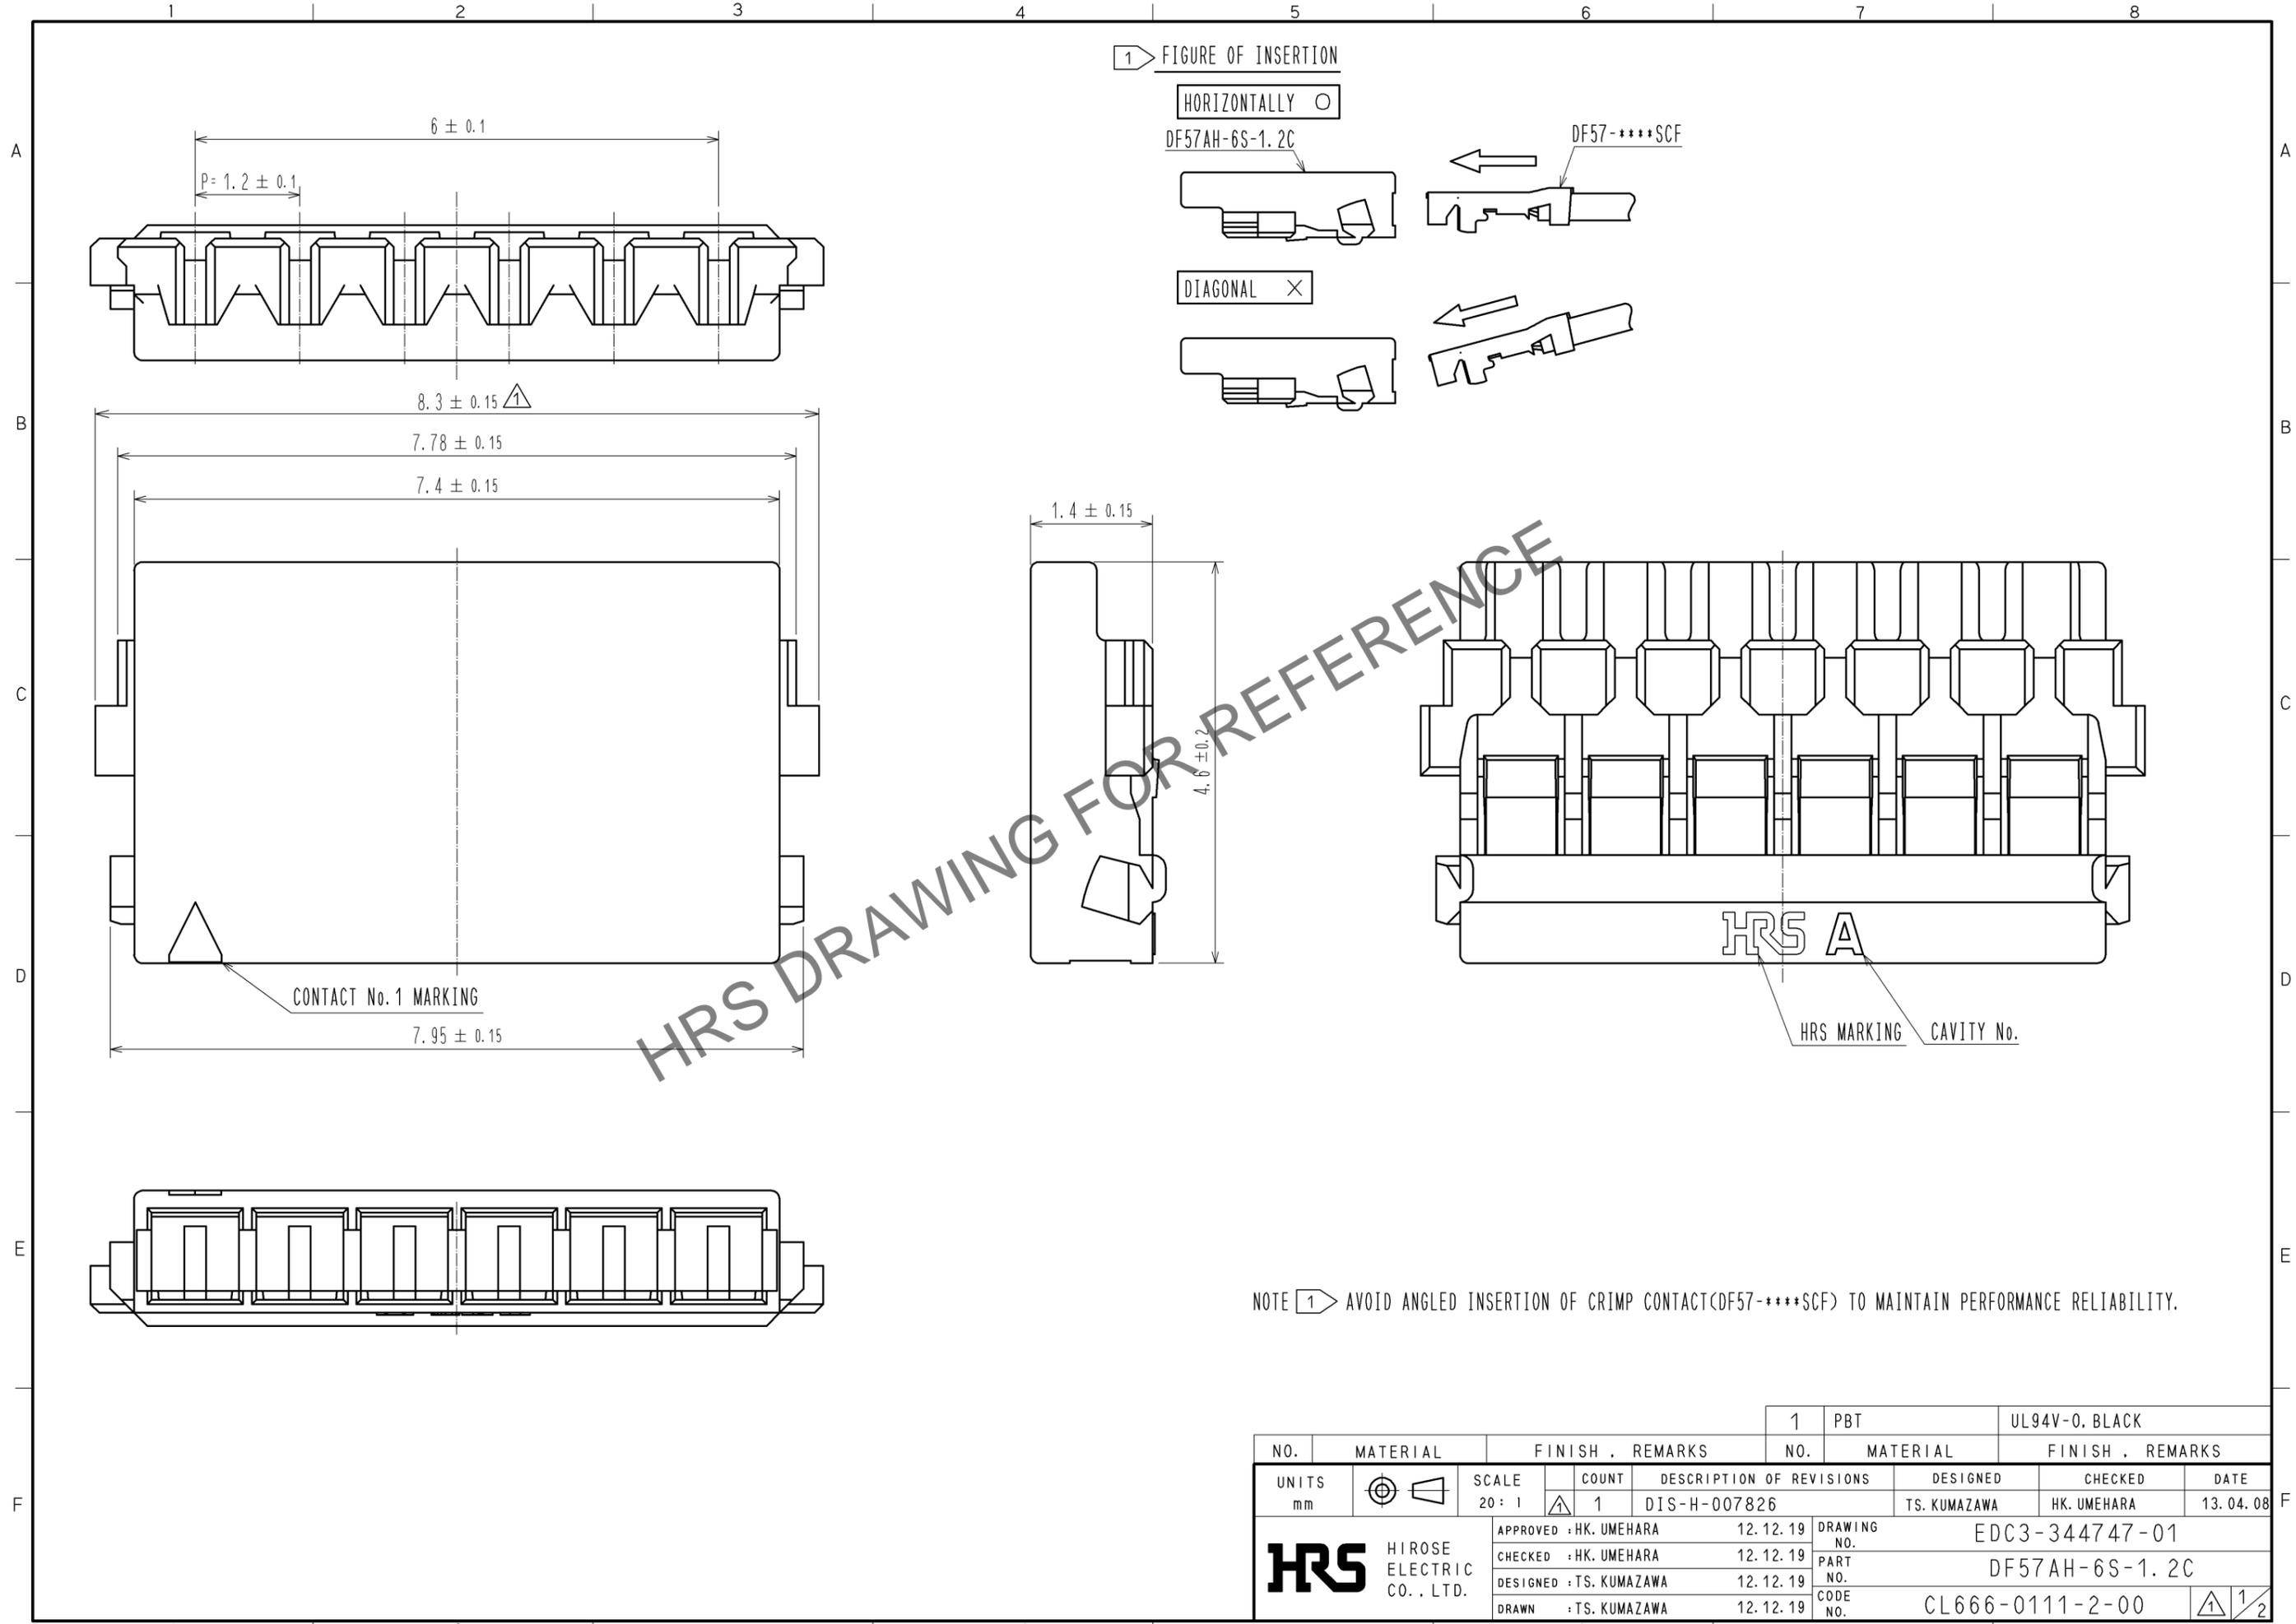


HRS DRAWING FOR REFERENCE

NO.		MATERIAL		FINISH . REMARKS		1		PBT		UL94V-0. BLACK			
UNITS mm		SCALE 20: 1		COUNT 1		DESCRIPTION OF REVISIONS DIS-H-007826		DESIGNED TS. KUMAZAWA		CHECKED HK. UMEHARA		DATE 13. 04. 08	
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : HK. UMEHARA		12. 12. 19		DRAWING NO.		EDC3-344747-01					
		CHECKED : HK. UMEHARA		12. 12. 19		PART NO.		DF57AH-6S-1. 2C					
		DESIGNED : TS. KUMAZAWA		12. 12. 19		CODE NO.		CL666-0111-2-00					
		DRAWN : TS. KUMAZAWA		12. 12. 19				1/2					


DF57 Series Mating / Unmating Operation Instruction

Mating


① By positioning the convexity of the socket sides to the header concavity, align the centers of the socket and the header in pitch direction.

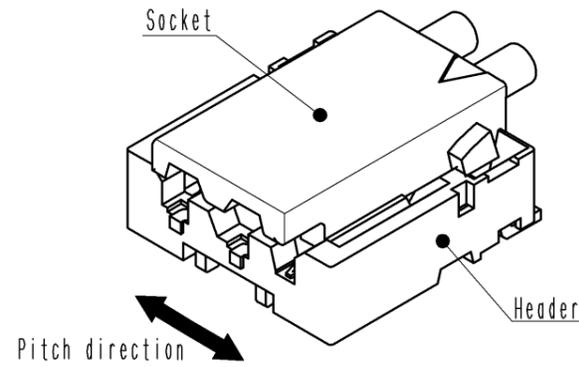

② Slightly press the socket down at cable side to tilted angle.

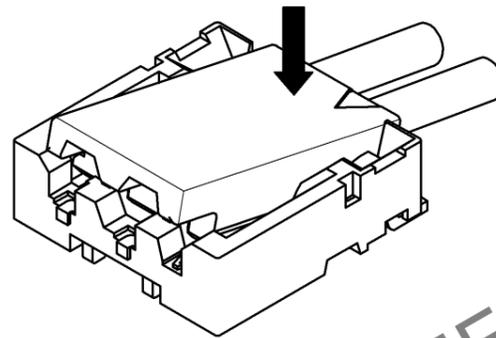


③ Press down at the lever side with stabilizing the cable side to insert. Mating completes.

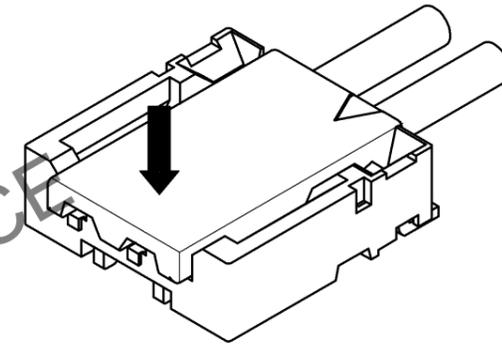


Unmating


① Hook the lever with finger nail.

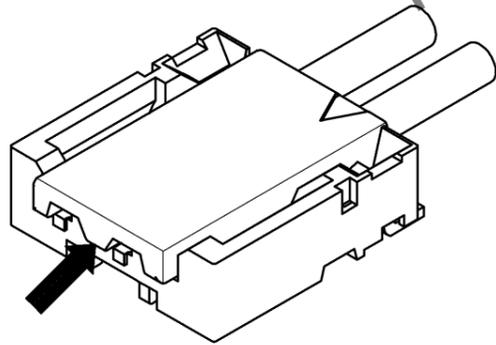

② Lift up to the upper direction and friction lock is released.

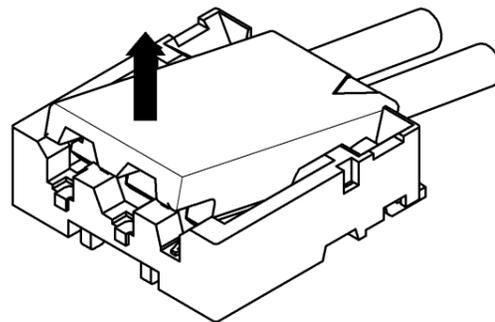

③ Lift up to the upper direction and positive lock is released. Removal completes.

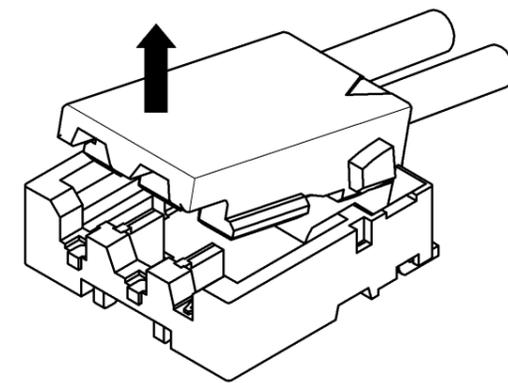

HRS DRAWING FOR REFERENCE

HRS	DRAWING NO.	EDC3-344747-01	
	PART NO.	DF57AH-6S-1.2C	
	CODE NO.	CL666-0111-2-00	

Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved. In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.