
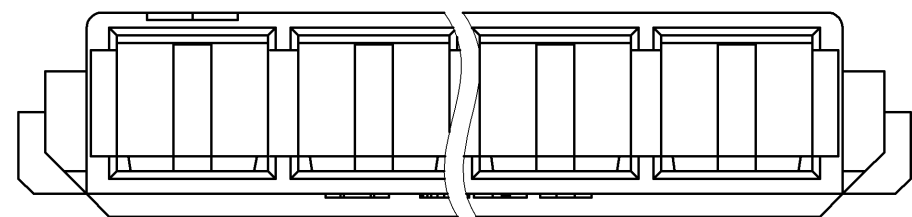
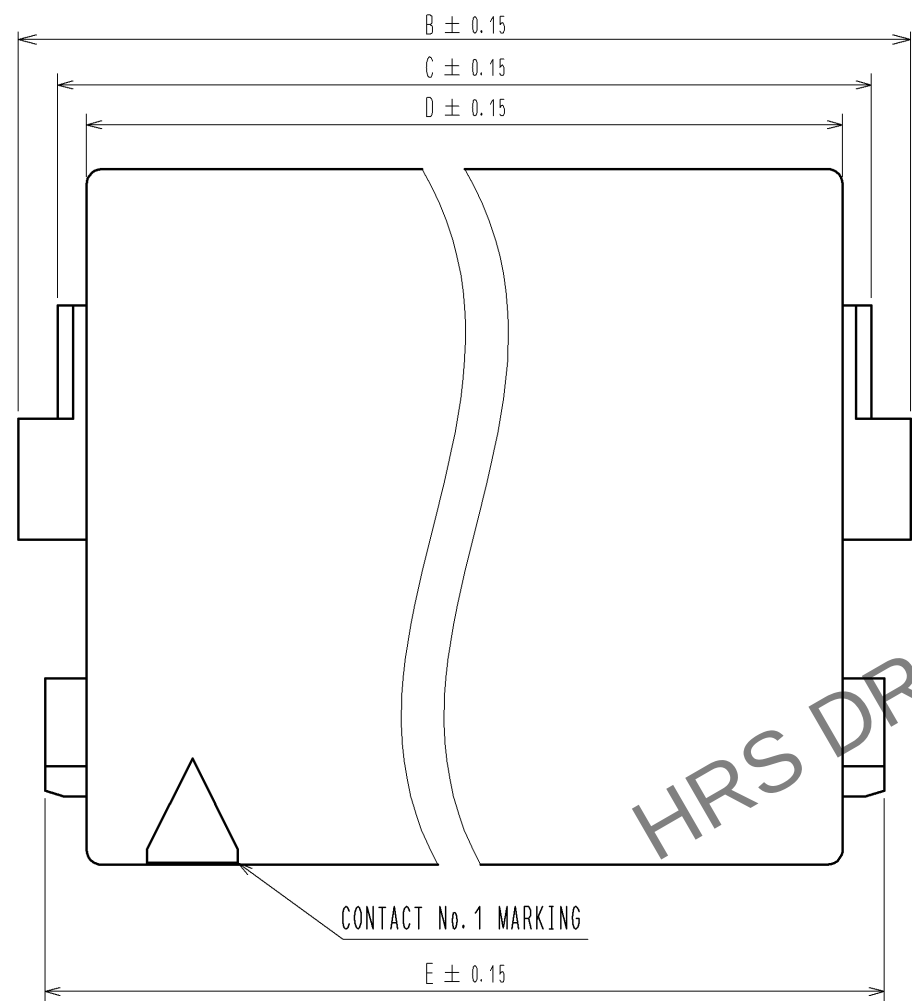


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

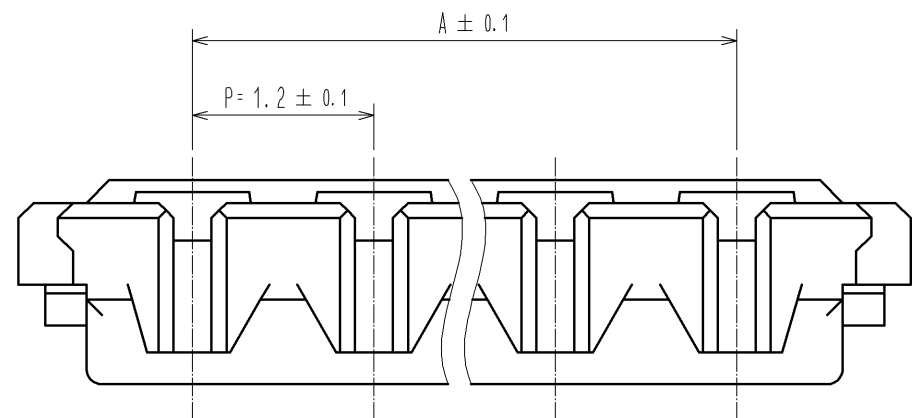



1 FIGURE OF INSERTION

HORIZONTALLY ○

DF57H-*S-1.2C(08)

DIAGONAL ×

DF57-***SCF

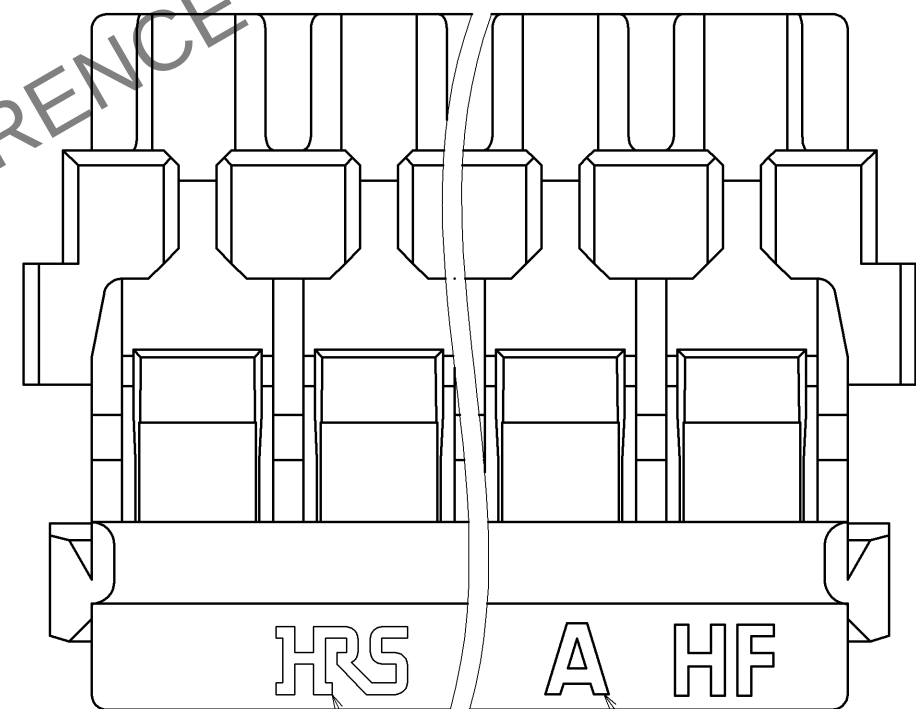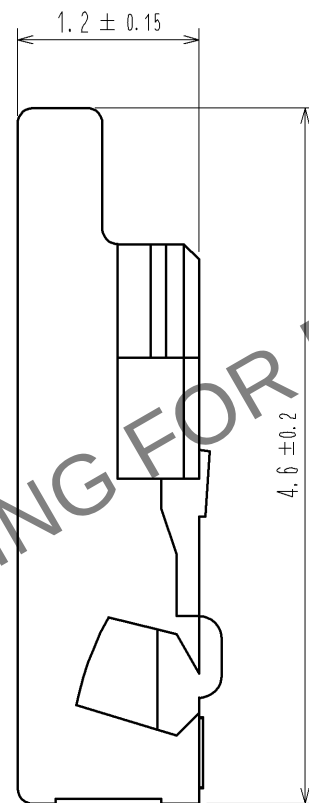


HRS MARKING

CAVITY No.

NOTE 1 AVOID ANGLED INSERTION OF CRIMP CONTACT(DF57-***SCF) TO MAINTAIN PERFORMANCE RELIABILITY.

CODE No.	PART No.	NUMBER OF CONTACTS	A	B	C	D	D
CL666-0100-6-08	DF57H-2S-1.2C(08)	2	1.2	3.5	2.98	2.6	3.15
CL666-0012-0-08	DF57H-3S-1.2C(08)	3	2.4	4.7	4.18	3.8	4.35
△ CL666-0101-9-08	DF57H-4S-1.2C(08)	4	3.6	5.9	5.38	5.0	5.55
CL666-0102-1-08	DF57H-5S-1.2C(08)	5	4.8	7.1	6.58	6.2	6.75
△ CL666-0103-4-08	DF57H-6S-1.2C(08)	6	6.0	8.3	7.78	7.4	7.95


部番		材 質		処 理 , 備 考		1	LCP		UL94V-0, NATURAL(BEIGE)		
部番		材 質		処 理 , 備 考							
UNITS mm				SCALE 20 : 1		△の数 2	訂 正 記 事 DIS-H-008103		設 計 TS. KUMAZAWA	検 図 HK. UMEHARA	年月日 13. 08. 19
 HIROSE ELECTRIC CO., LTD.				承 認 : KI. AKIYAMA		12. 11. 21		図番 : EDC3-349275-01			
				検 図 : HK. UMEHARA		12. 11. 21		製品名 : DF57H-*S-1. 2C(08)			
				設 計 : TS. KUMAZAWA		12. 11. 21		製品 コード			
				製 図 : TS. KUMAZAWA		12. 11. 21		CL666-			
						1		2			

Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


DF57 Series Mating / Unmating Operation Instruction

Mating


①By positioning the convexity of the socket sides to the header concavity, align the centers of the socket and the header in pitch direction.

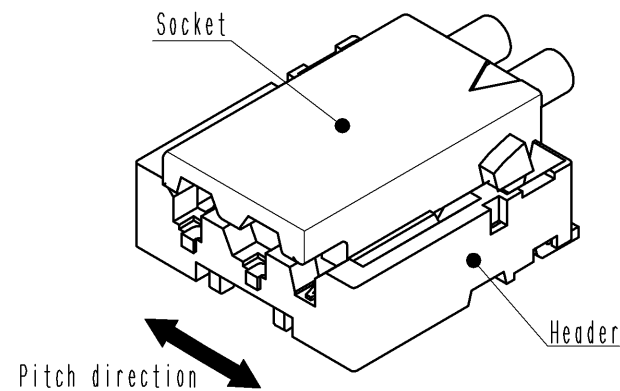

②Slightly press the socket down at cable side to tilted angle.

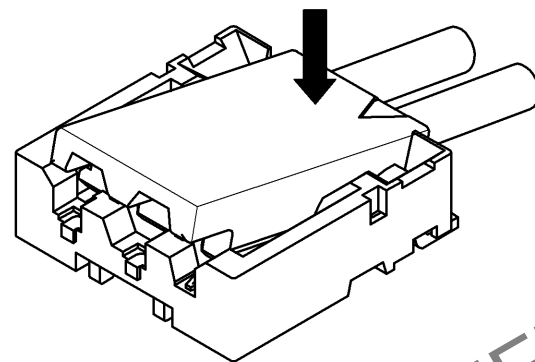


③Press down at the lever side with stabilizing the cable side to insert. Mating completes.

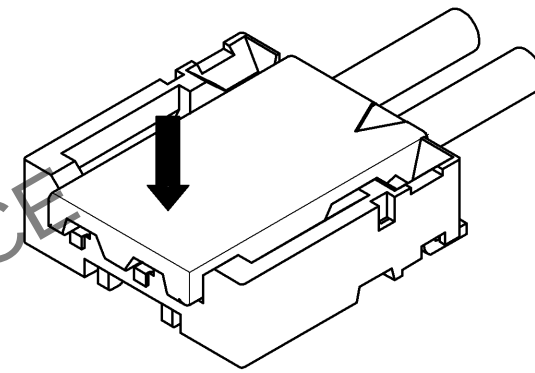


Unmating


①Hook the lever with finger nail.

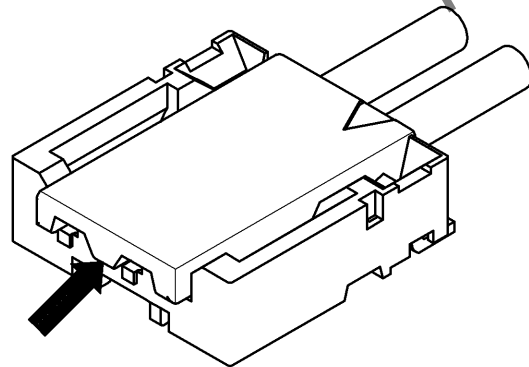

②Lift up to the upper direction and friction lock is released.

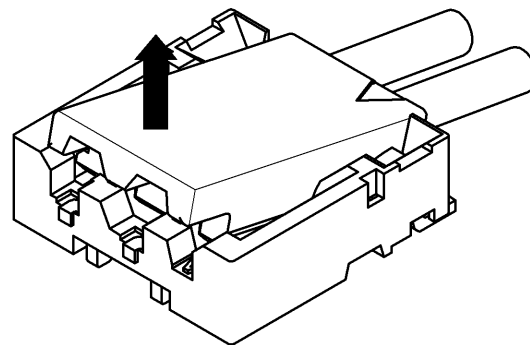

③Lift up to the upper direction and positive lock is released. Removal completes.

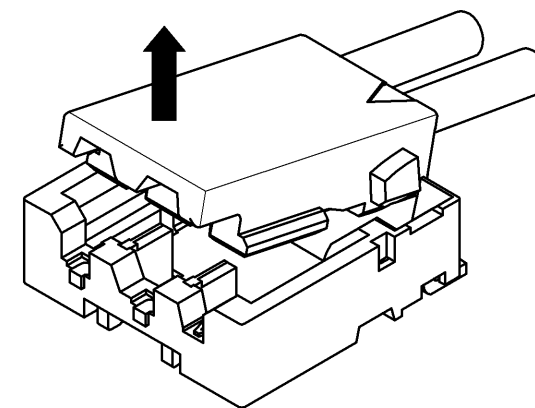

HRS

DRAWING NO.	EDC3-349275-01
PART NO.	DF57H-*S-1.2C<08>
CODE NO.	CL666-

1/2