

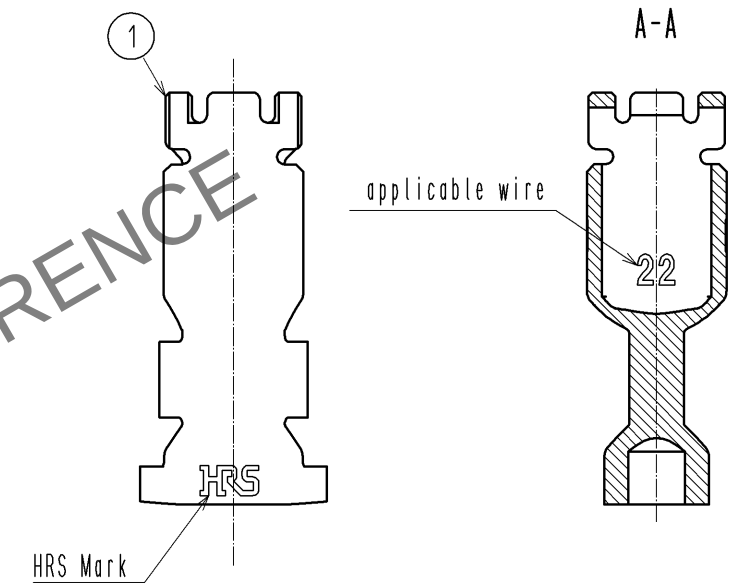



Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

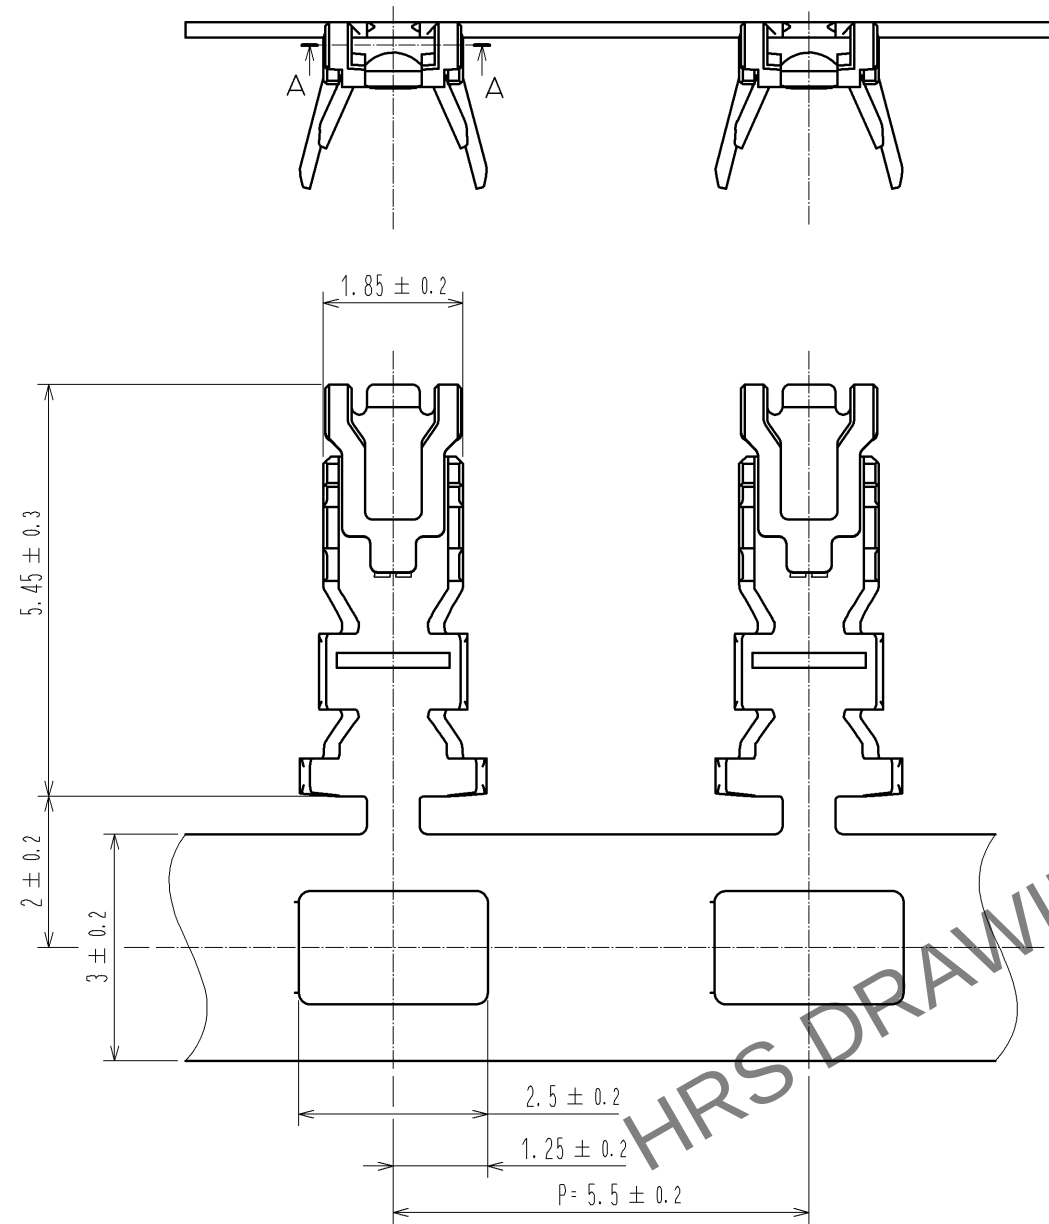


2 Reel style and dimensions

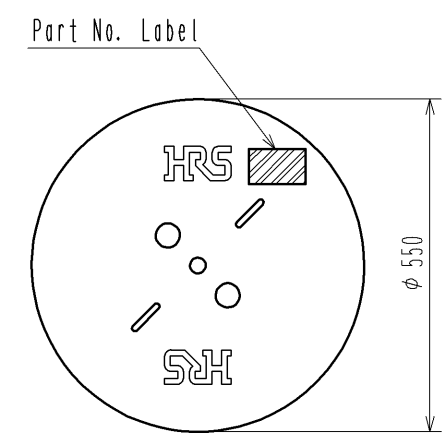

Detail Of Part No. Label

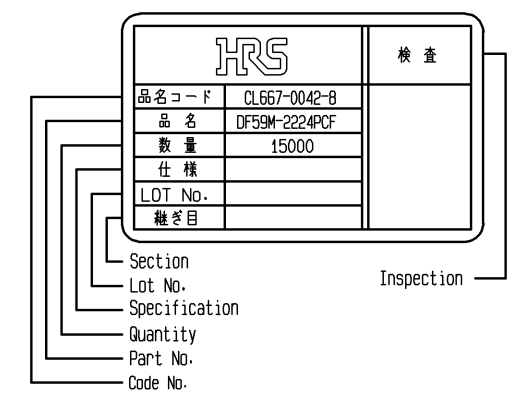

- Notes
- 1RL : 15000 contacts.
 - 2 Style of reel and box are shown in figure.
 3. Please be sure to check the form of crimping using a cable when you adjust applicator.
 4. Always refer to the manuals below for operation of this product.
For Cable assembly / Cable assembly procedure ETAD-H0778
For Mating/Unmating / Operation manual ETAD-H0779

NO.		MATERIAL		FINISH . REMARKS		1	Copper Alloy		Surface :Tin plating 1μm MIN		
NO.		MATERIAL		FINISH . REMARKS							
UNITS mm				SCALE 10 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.				APPROVED : HK. UMEHARA		14. 05. 20	DRAWING NO.		EDC3-356515-01		
				CHECED : HK. UMEHARA		14. 05. 20	PART NO.		DF59M-2224PCF		
				DESIGNED : SZ. ONO		14. 05. 19	CODE NO.		CL667-0042-8-00		
				DRAWN : SZ. ONO		14. 05. 19					
										 1/1	