

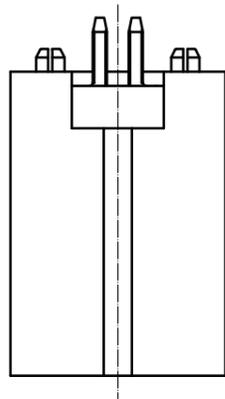
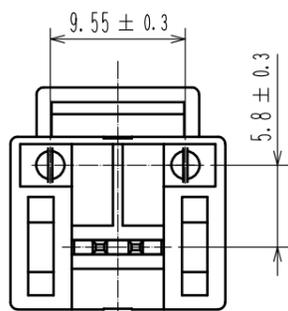
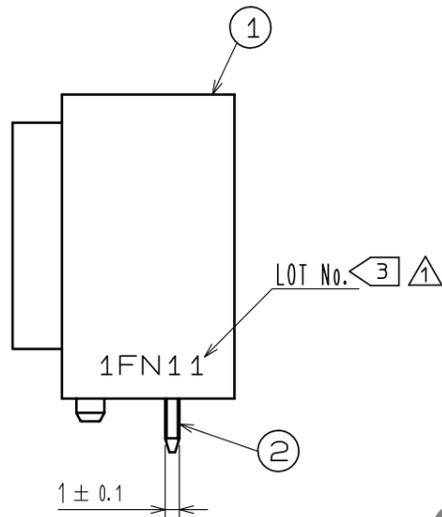


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

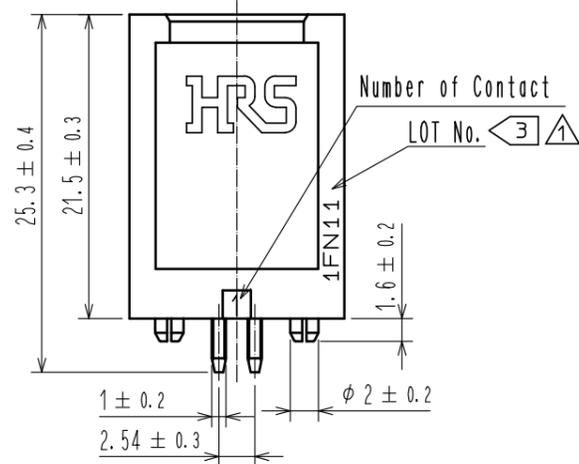


Notes 1. Per tray : 160 Pieces.
 2. UL(File No. E52653)
 C-UL(File No. E52653)
 TUV (Certificate No. R50244085) authorization article.

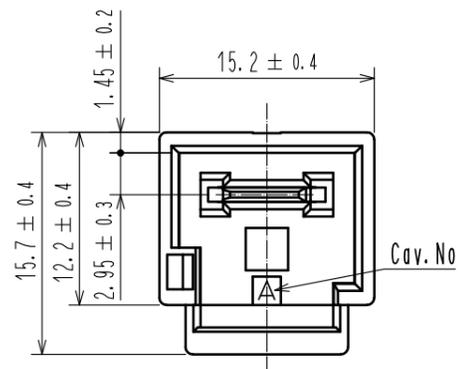


<1> <3> Lot No. is displayed in one of the two locations.



Recommended PCB Layout
 (Board thickness: t=1.6±0.1mm)

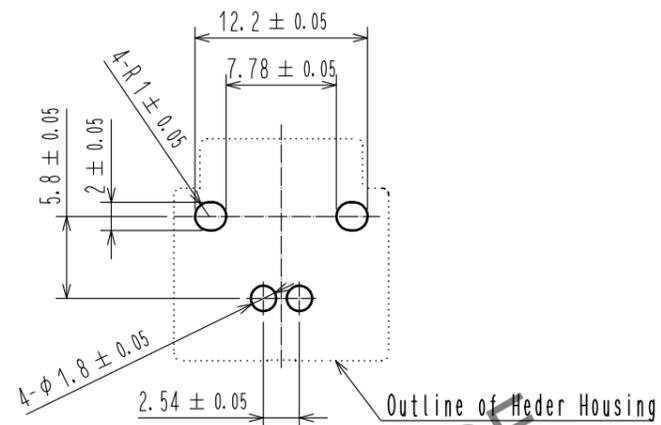

Application Diagram

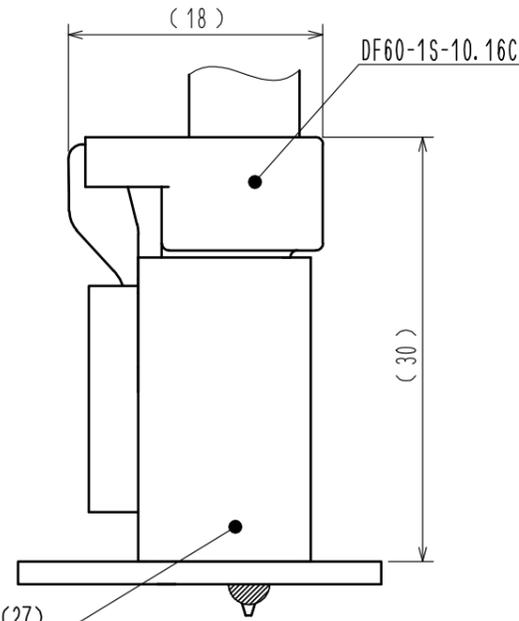

Packing Diagram (FREEE)

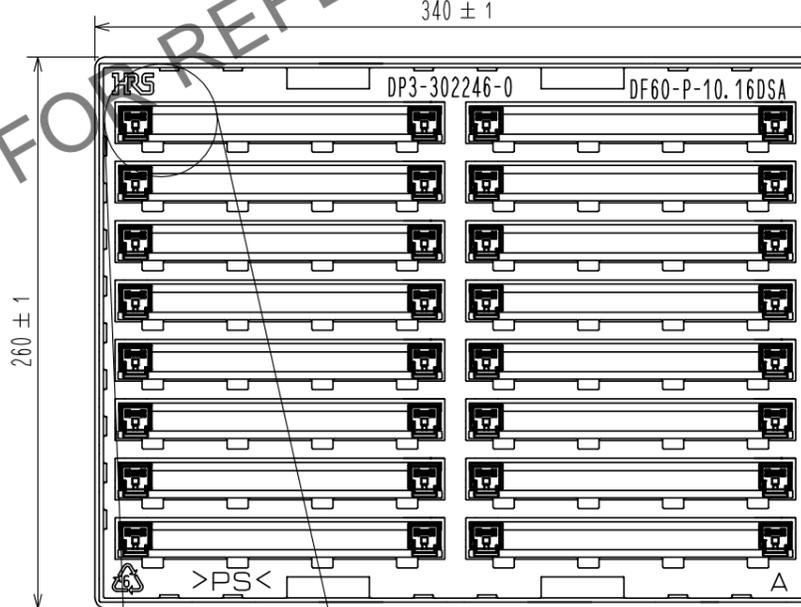

3	PS	Clear
2	Copper Alloy	Contact Area : Au Plating 0.2μm min LEAD Area : Tin Plating 1μm min Under Plating : Ni Plating 1μm min

1	PBT	Black, UL94-V0	NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS	
UNITS	mm	SCALE	2 : 1	COUNT	3	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
						DIS-H-00012301	TS.MIYAKI	SZ.ONO	20220217
HRS HIROSE ELECTRIC CO., LTD.		APPROVED	: KI. AKIYAMA	20160407	DRAWING NO.	EDC-338973-27-00			
		CHECED	: TS. FUKUSHIMA	20160407	PART NO.	DF60-1P-10.16DSA(27)			
		DESIGNED	: TS. KUMAZAWA	20160407	CODE NO.	CL0680-3004-5-27			
		DRAWN	: TS. KUMAZAWA	20160407					