

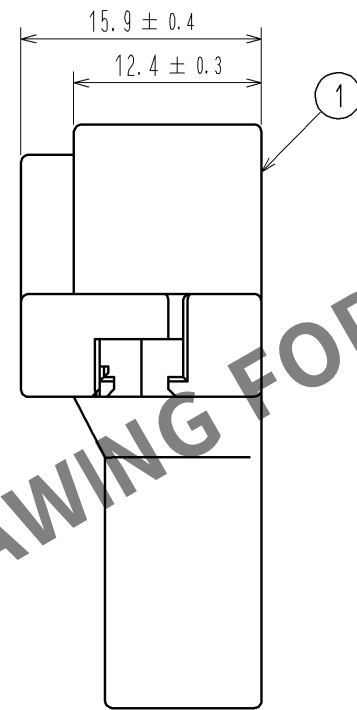
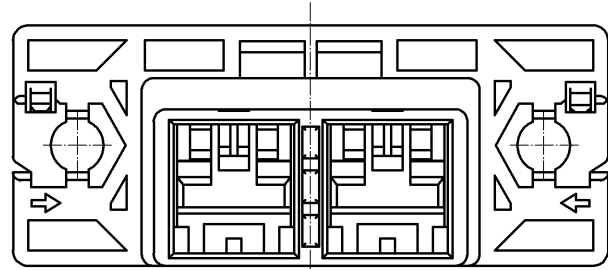
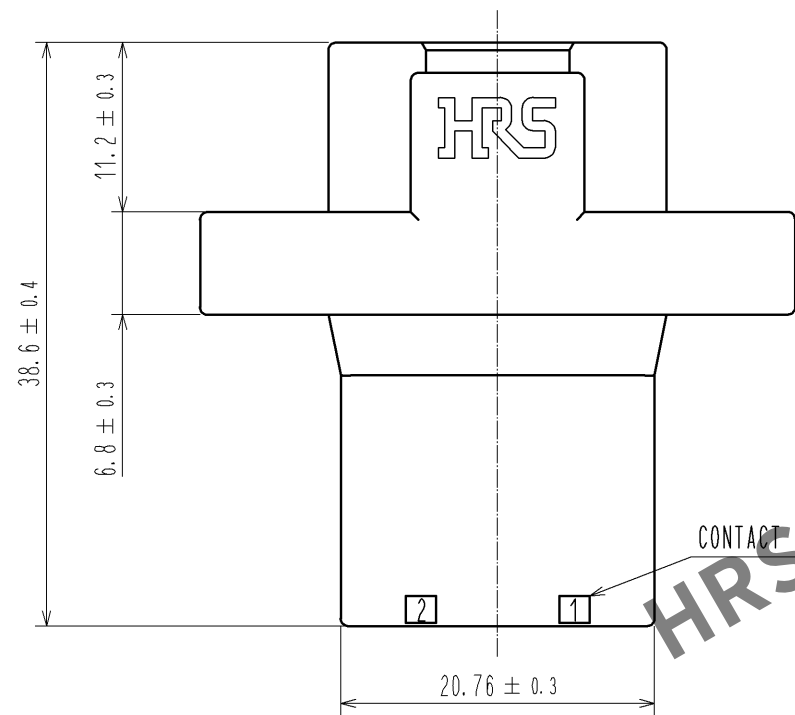



Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

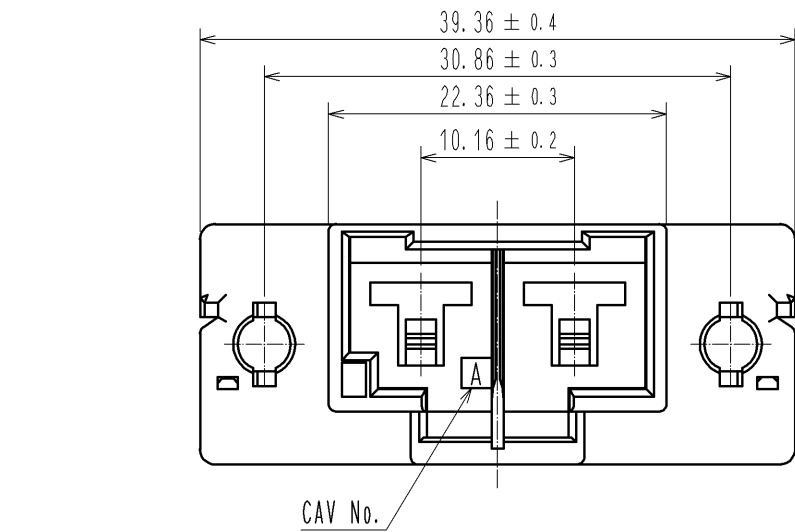

RECOMMENDED PANEL CUT OUT DIMENSION

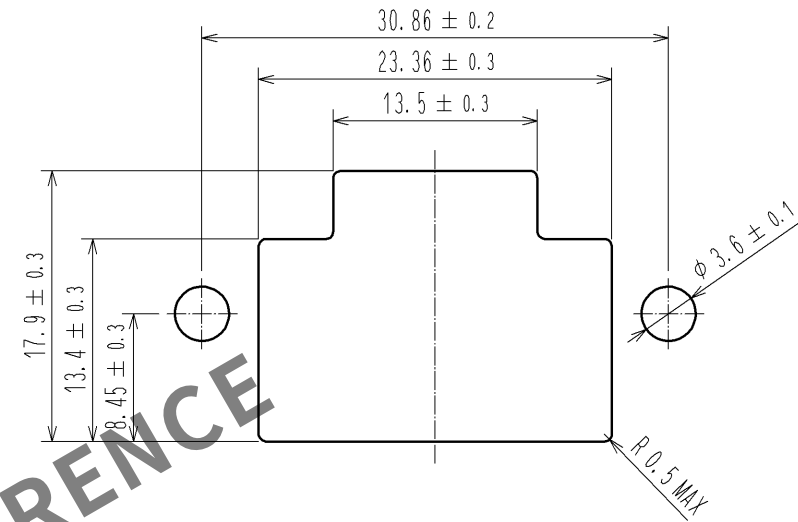

MATING FIGURE

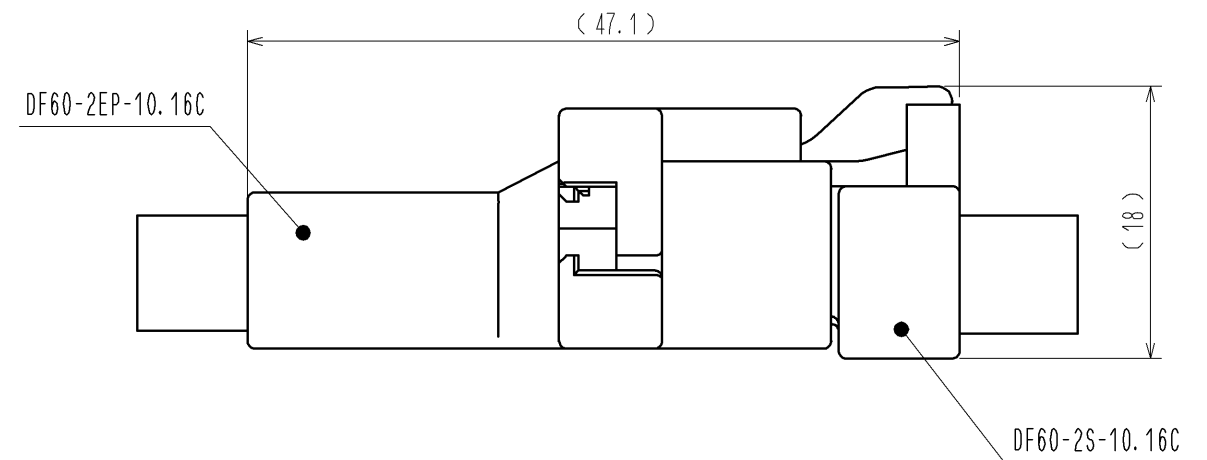


NOTE 1. PER PACK : 100 PIECES.


				1	PBT		BLACK , UL94V-0										
NO.		MATERIAL		FINISH , REMARKS				NO.		MATERIAL		FINISH , REMARKS					
UNITS mm				SCALE 2 : 1				COUNT		DESCRIPTION OF REVISIONS		DESIGNED		CHECKED		DATE	
HRS HIROSE ELECTRIC CO. , LTD.				APPROVED : KI. AKIYAMA				13.12.03		DRAWING NO.		EDC3-344821-01					
				CHECKED : HK. UMEHARA				13.12.03		PART NO.		DF60-2EP-10.16C					
				DESIGNED : TS. KUMAZAWA				13.12.03		CODE NO.		CL680-3025-5-00					
				DRAWN : TS. KUMAZAWA				13.12.03									

DF60 IN-LINE TYPE RECOMMENDED PANEL MOUNTING MANUAL (WHEN NUTS USES)


NUT INSTALLATION PROCESS

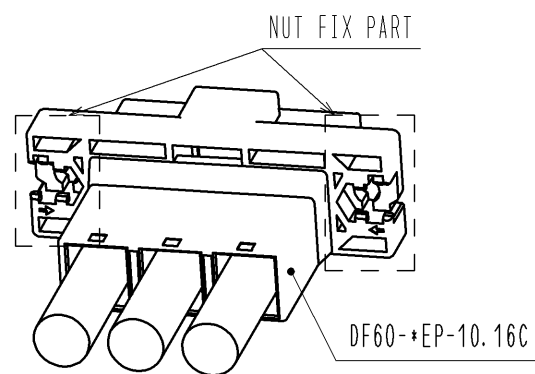

1. SLIDE A NUT (SIZE:M3) TO NUT FIX PART.

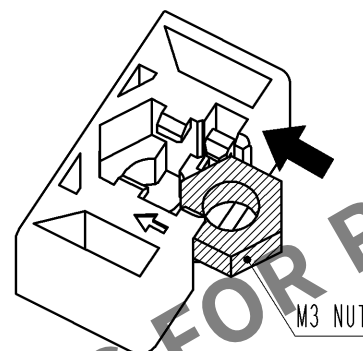


2. PRESS DOWN THE NUT UNTIL IT CLICKS,
THEN THIS SOUND MEANS THE NUT HAS INSERTED
INTO NUT HOLDER.

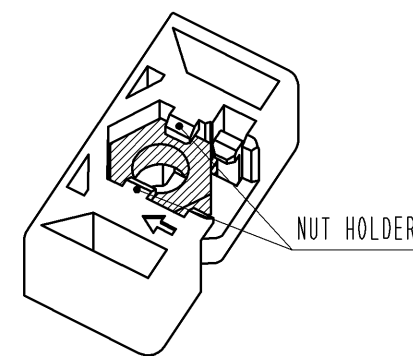


PANEL MOUNTING PROCESS

1. INSERT CONNECTOR INTO PANEL CUT OUT PART.

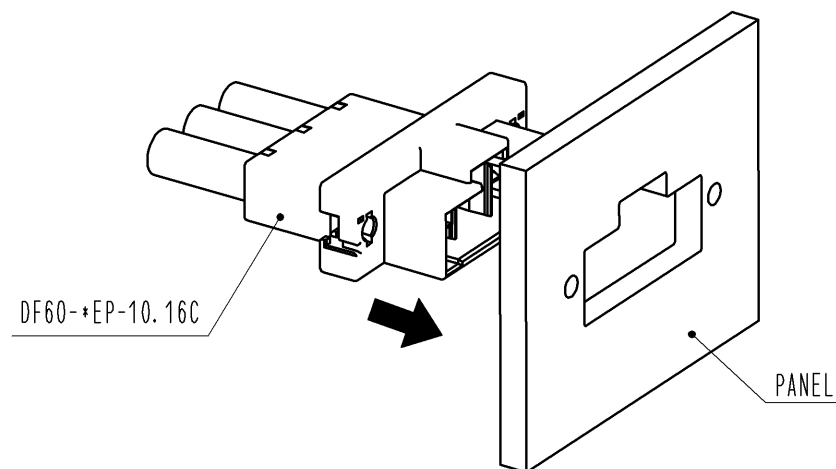

2. TIGHTEN A SCREW (SIZE:M3) TO FIX WITH PANEL.
RECOMMENDED TORQUE : LESS THAN 49N · cm

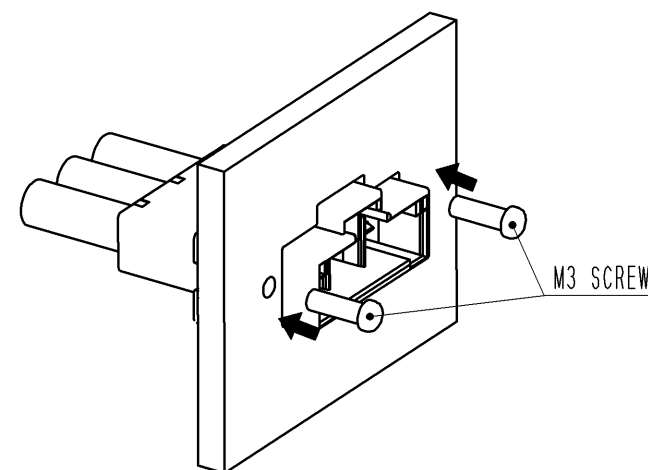

HRS

DRAWING NO.	EDC3-344821-01
PART NO.	DF60-2EP-10.16C
CODE NO.	CL680-3025-5-00

2/2