



Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

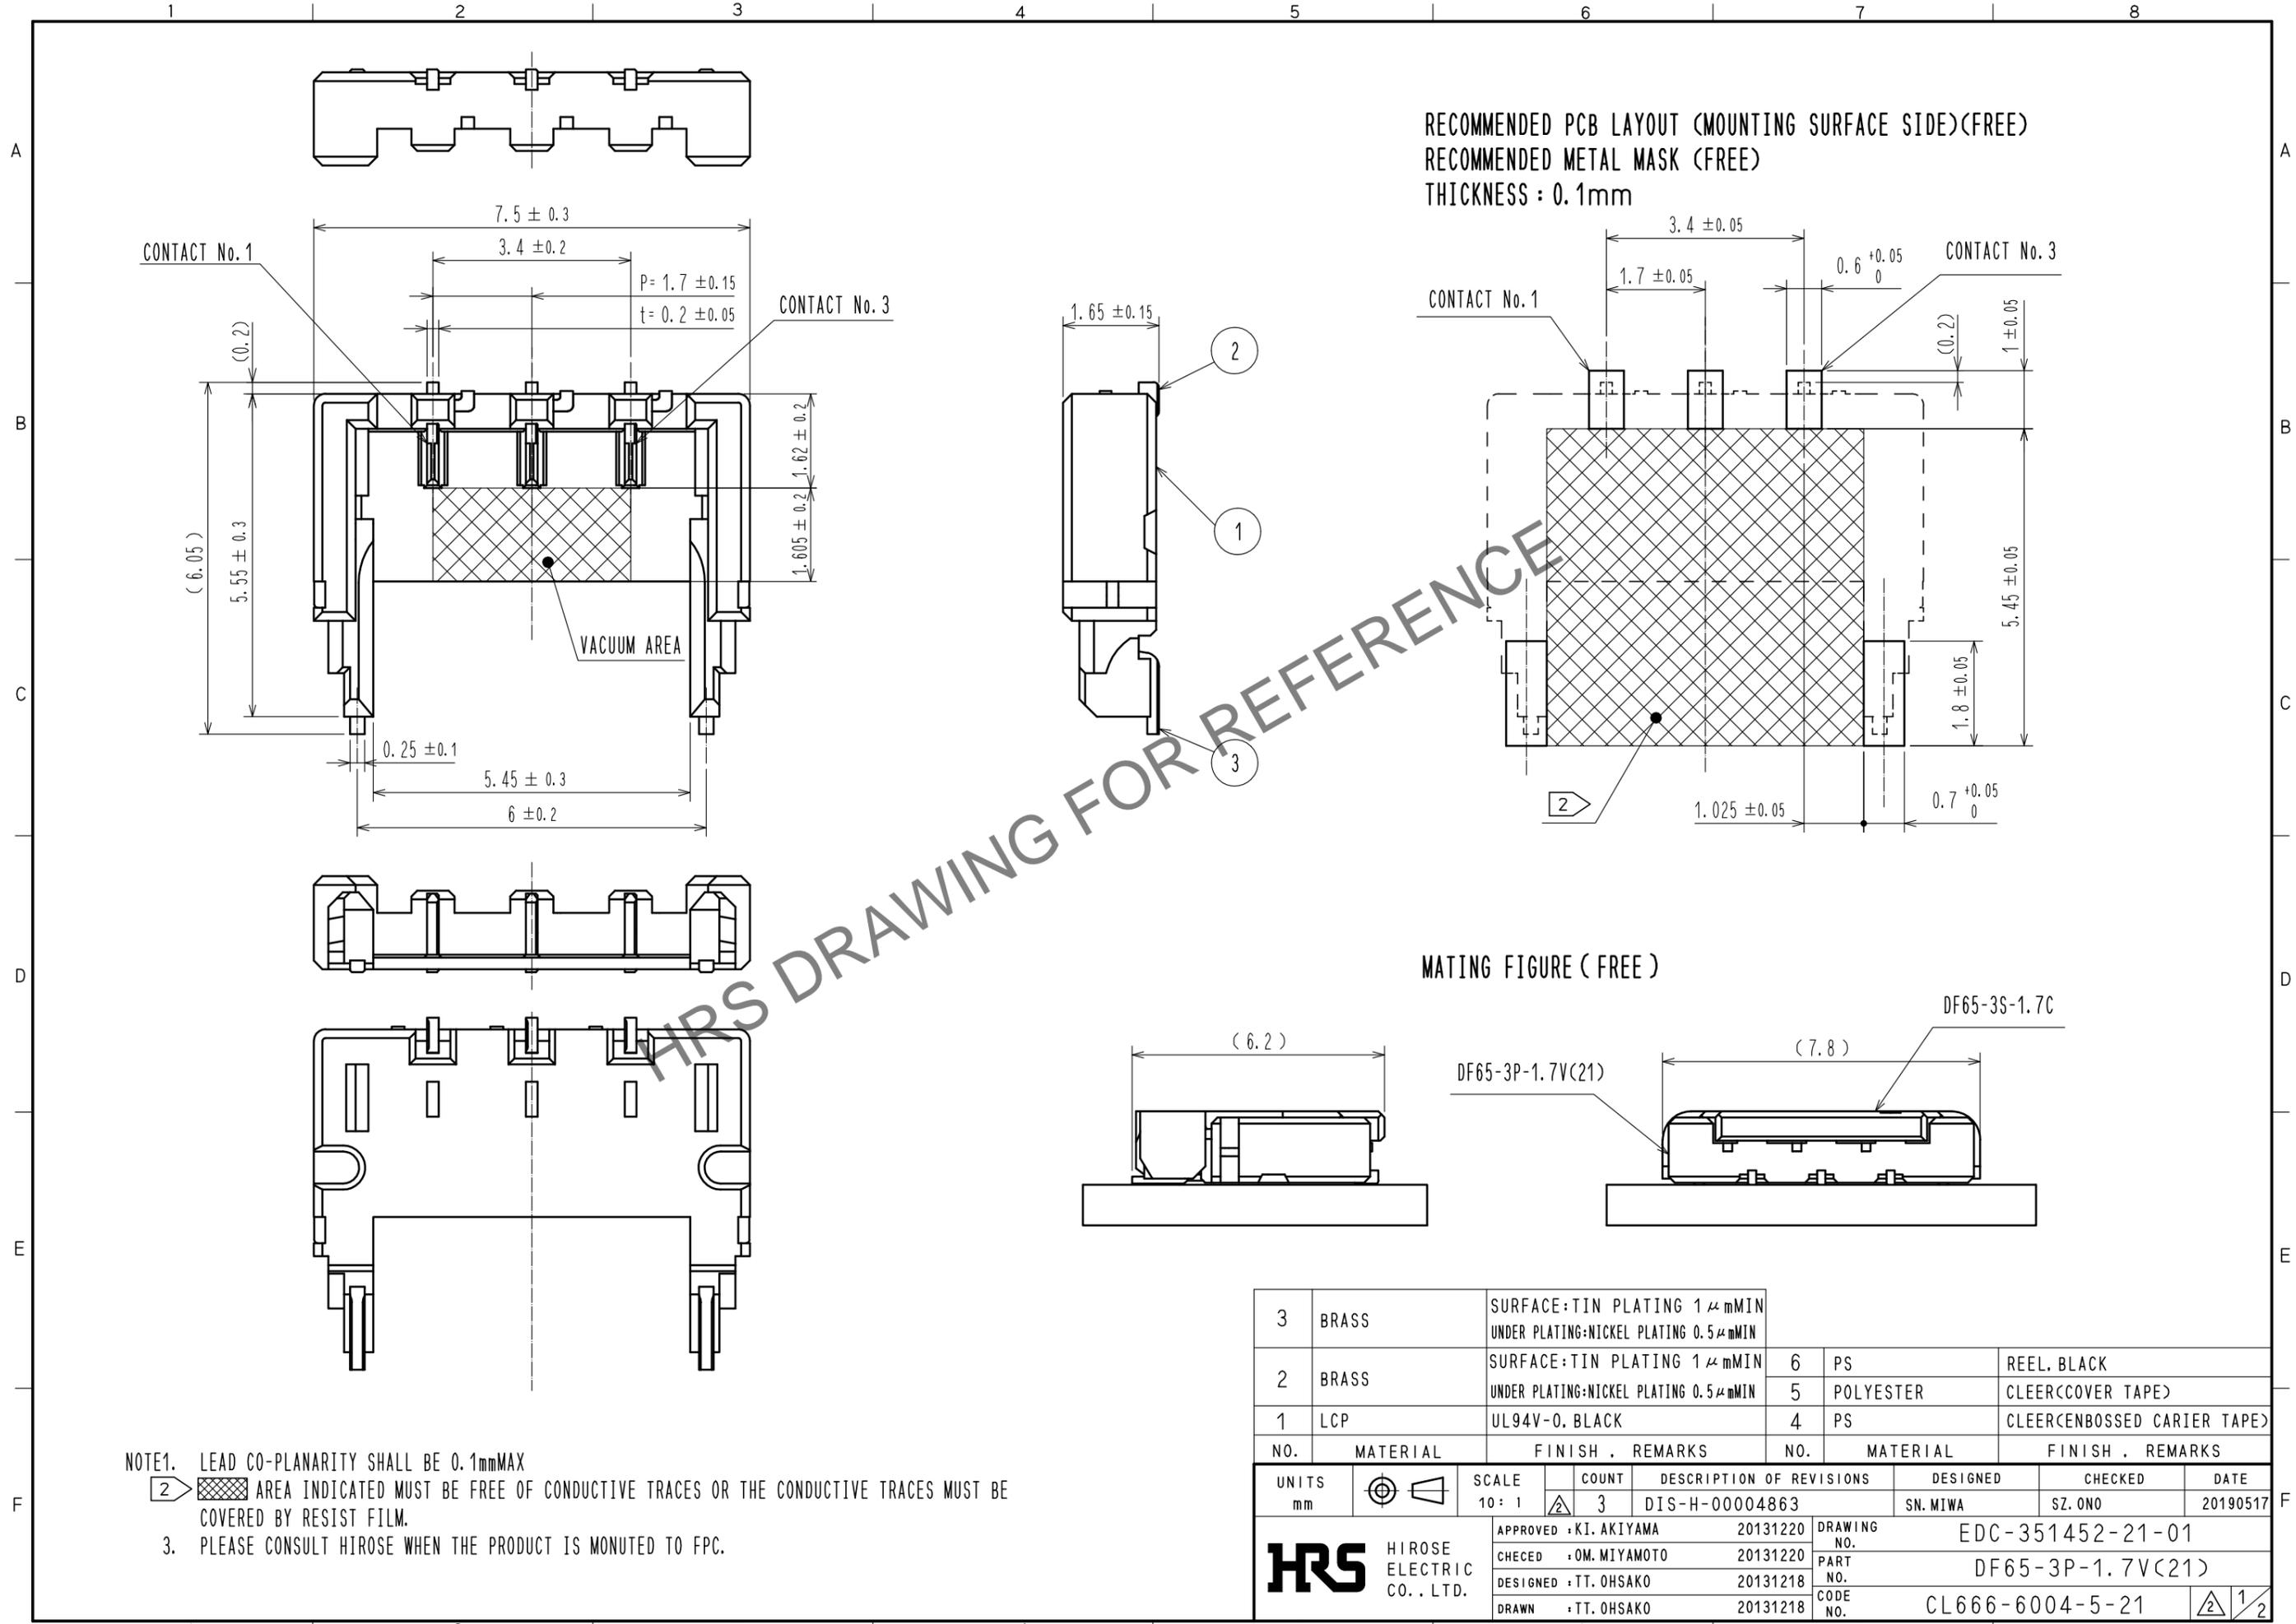

NOTE1. LEAD CO-PLANARITY SHALL BE 0.1mmMAX  
 2. AREA INDICATED MUST BE FREE OF CONDUCTIVE TRACES OR THE CONDUCTIVE TRACES MUST BE COVERED BY RESIST FILM.  
 3. PLEASE CONSULT HIROSE WHEN THE PRODUCT IS MOUNTED TO FPC.

3	BRASS	SURFACE:TIN PLATING 1μmMIN UNDER PLATING:NICKEL PLATING 0.5μmMIN			
2	BRASS	SURFACE:TIN PLATING 1μmMIN UNDER PLATING:NICKEL PLATING 0.5μmMIN	6	PS	REEL. BLACK
1	LCP	UL94V-0. BLACK	5	POLYESTER	CLEER(COVER TAPE)
			4	PS	CLEER(CARRIER TAPE)
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS	mm	SCALE 10:1	COUNT 3	DESCRIPTION OF REVISIONS	DESIGNED SN.MIWA
				DIS-H-00004863	CHECKED SZ.ONO
				DATE 20190517	
APPROVED : KI. AKIYAMA		20131220	DRAWING NO. EDC-351452-21-01		
CHECKED : OM. MIYAMOTO		20131220	PART NO. DF65-3P-1.7V(21)		
DESIGNED : TT. OHSAKO		20131218	CODE NO. CL666-6004-5-21		
DRAWN : TT. OHSAKO		20131218			

Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

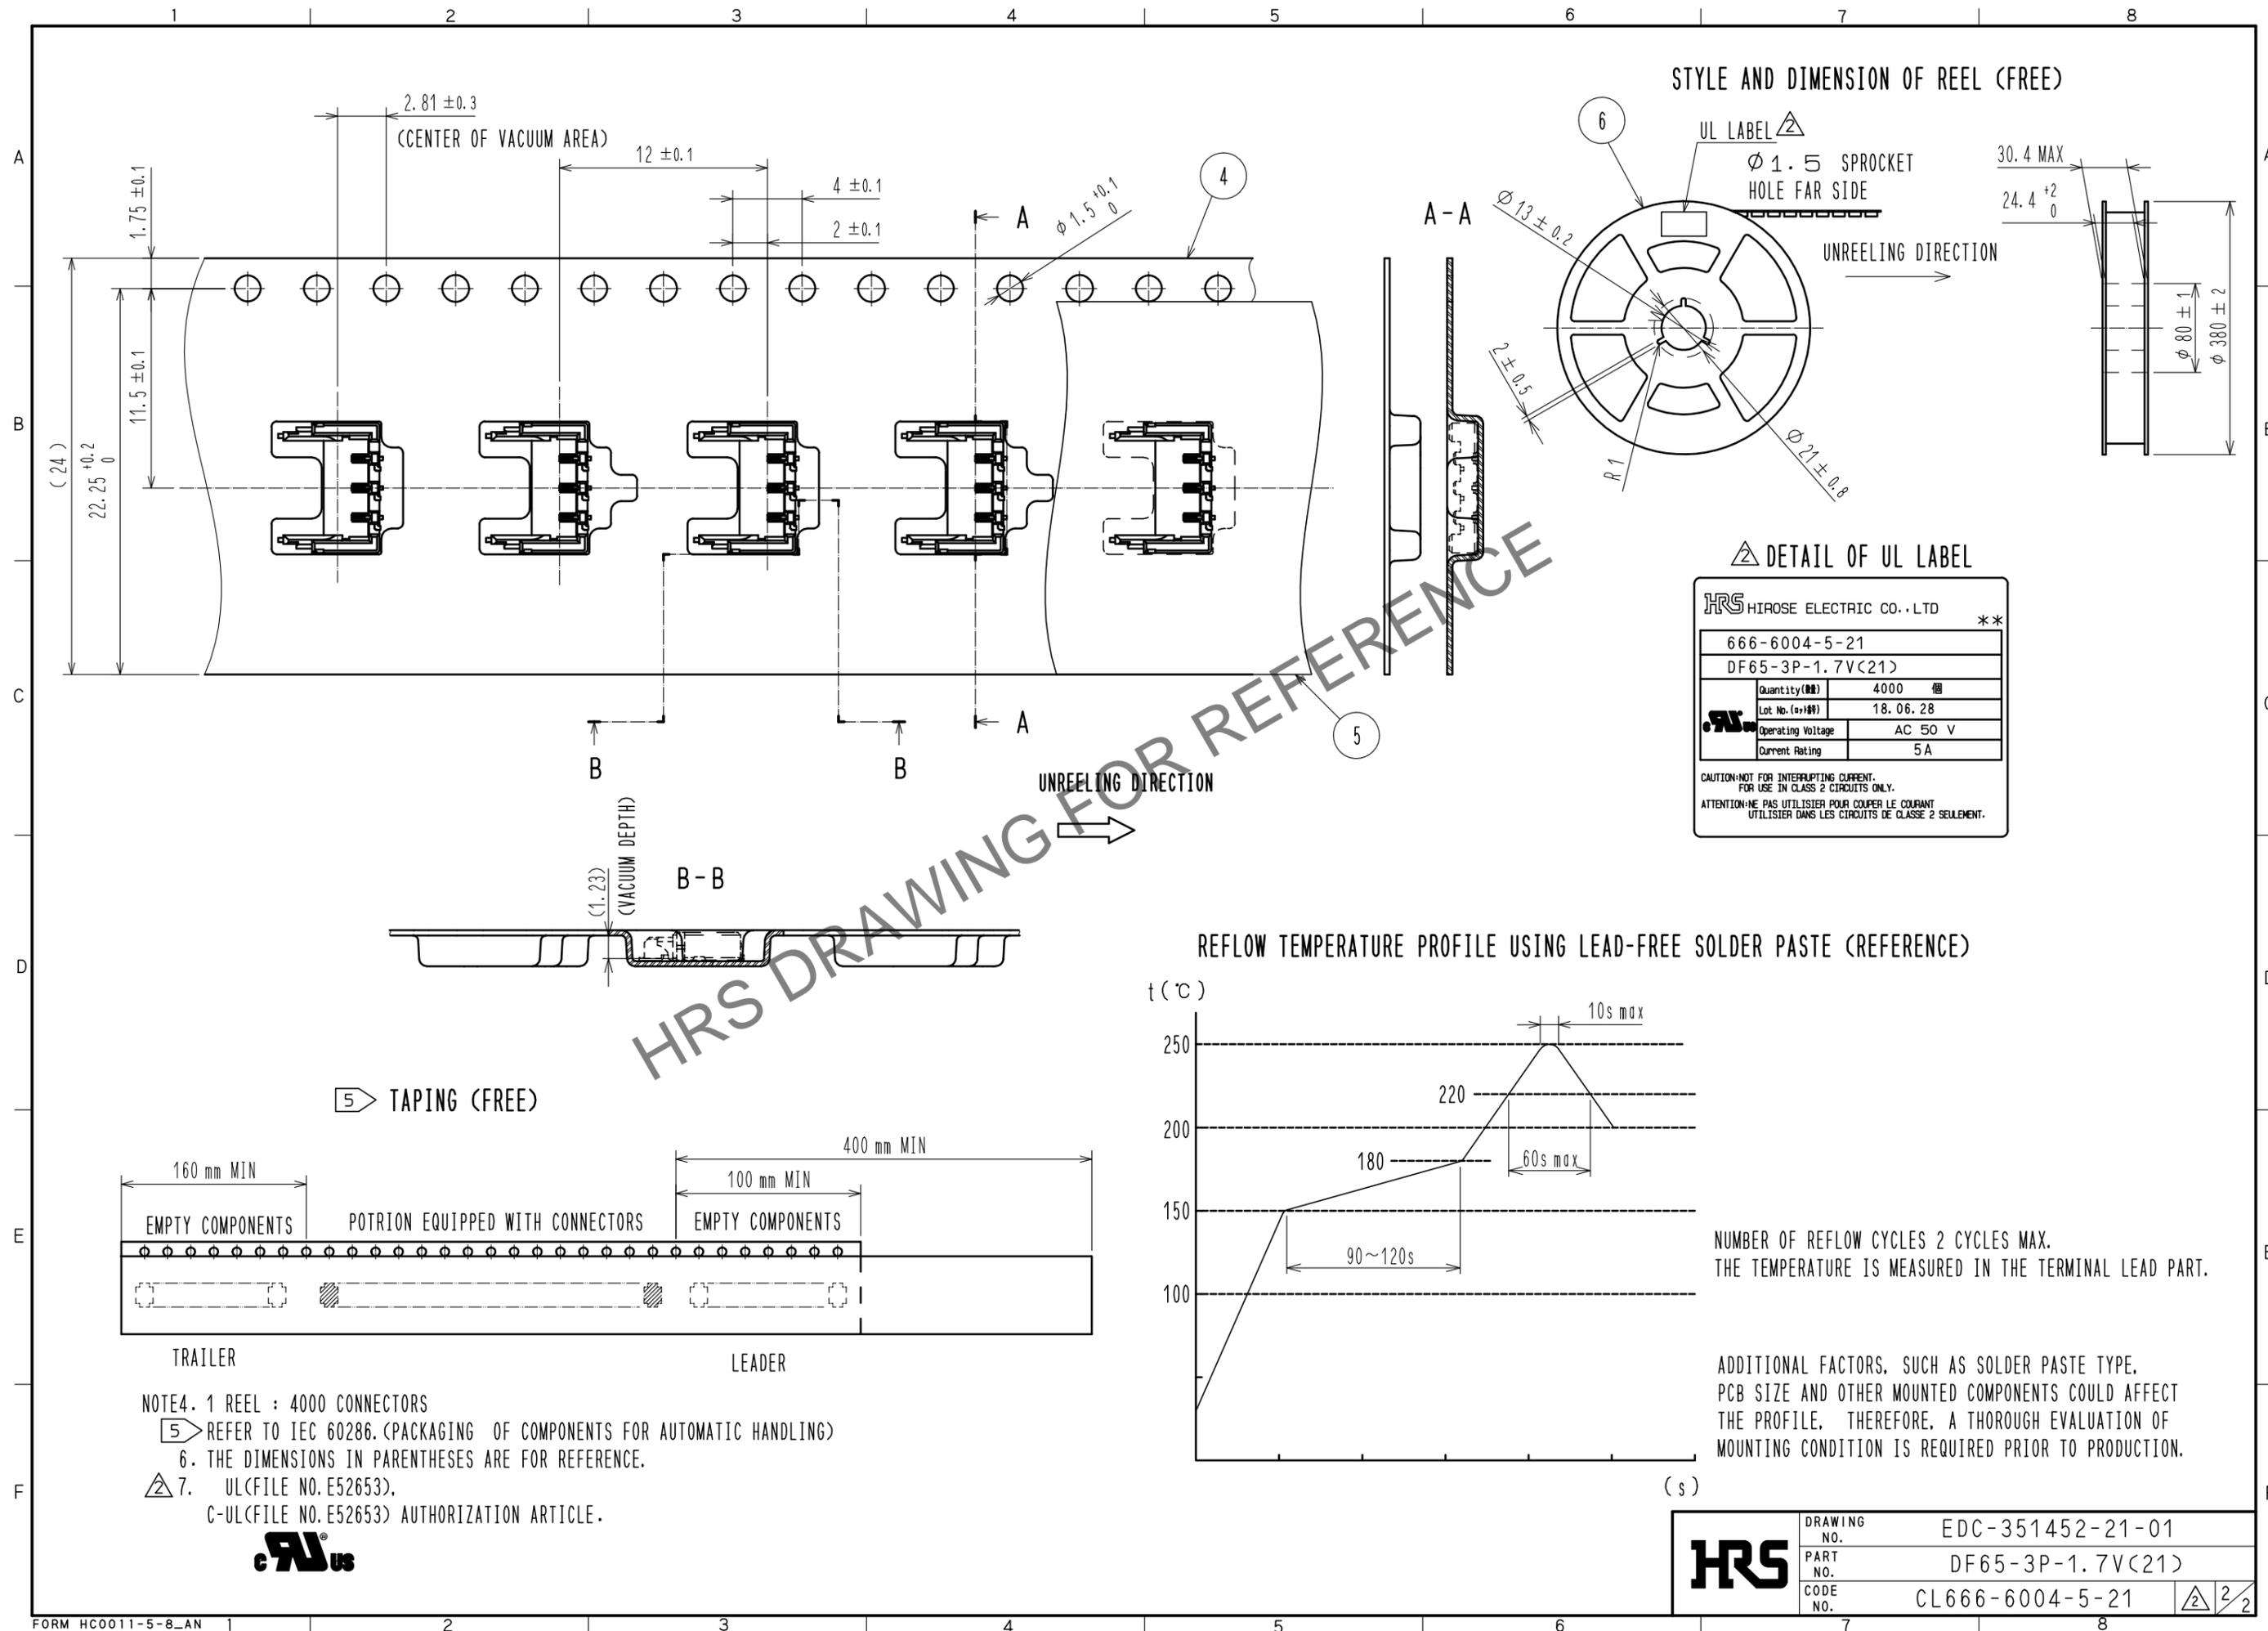


STYLE AND DIMENSION OF REEL (FREE)

DETAIL OF UL LABEL

HRS HIROSE ELECTRIC CO., LTD	
666-6004-5-21	
DF65-3P-1.7V<21>	
Quantity (個)	4000 個
Lot No. (年月日)	18.06.28
Operating Voltage	AC 50 V
Current Rating	5 A

CAUTION: NOT FOR INTERRUPTING CURRENT. FOR USE IN CLASS 2 CIRCUITS ONLY.  
 ATTENTION: NE PAS UTILISER POUR COUPER LE COURANT UTILISER DANS LES CIRCUITS DE CLASSE 2 SEULEMENT.

REFLOW TEMPERATURE PROFILE USING LEAD-FREE SOLDER PASTE (REFERENCE)

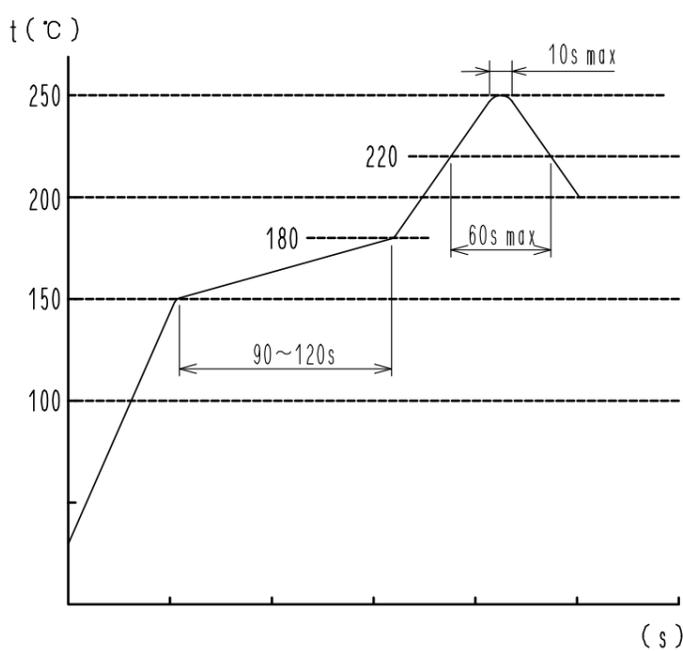

NUMBER OF REFLOW CYCLES 2 CYCLES MAX.  
 THE TEMPERATURE IS MEASURED IN THE TERMINAL LEAD PART.

ADDITIONAL FACTORS, SUCH AS SOLDER PASTE TYPE, PCB SIZE AND OTHER MOUNTED COMPONENTS COULD AFFECT THE PROFILE. THEREFORE, A THOROUGH EVALUATION OF MOUNTING CONDITION IS REQUIRED PRIOR TO PRODUCTION.

- NOTE 4. 1 REEL : 4000 CONNECTORS  
 5 REFER TO IEC 60286. (PACKAGING OF COMPONENTS FOR AUTOMATIC HANDLING)  
 6. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.  
 7. UL (FILE NO. E52653).  
 C-UL (FILE NO. E52653) AUTHORIZATION ARTICLE.



<b>HRS</b>	DRAWING NO.	EDC-351452-21-01
	PART NO.	DF65-3P-1.7V<21>
	CODE NO.	CL666-6004-5-21
		2/2