


Sep.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

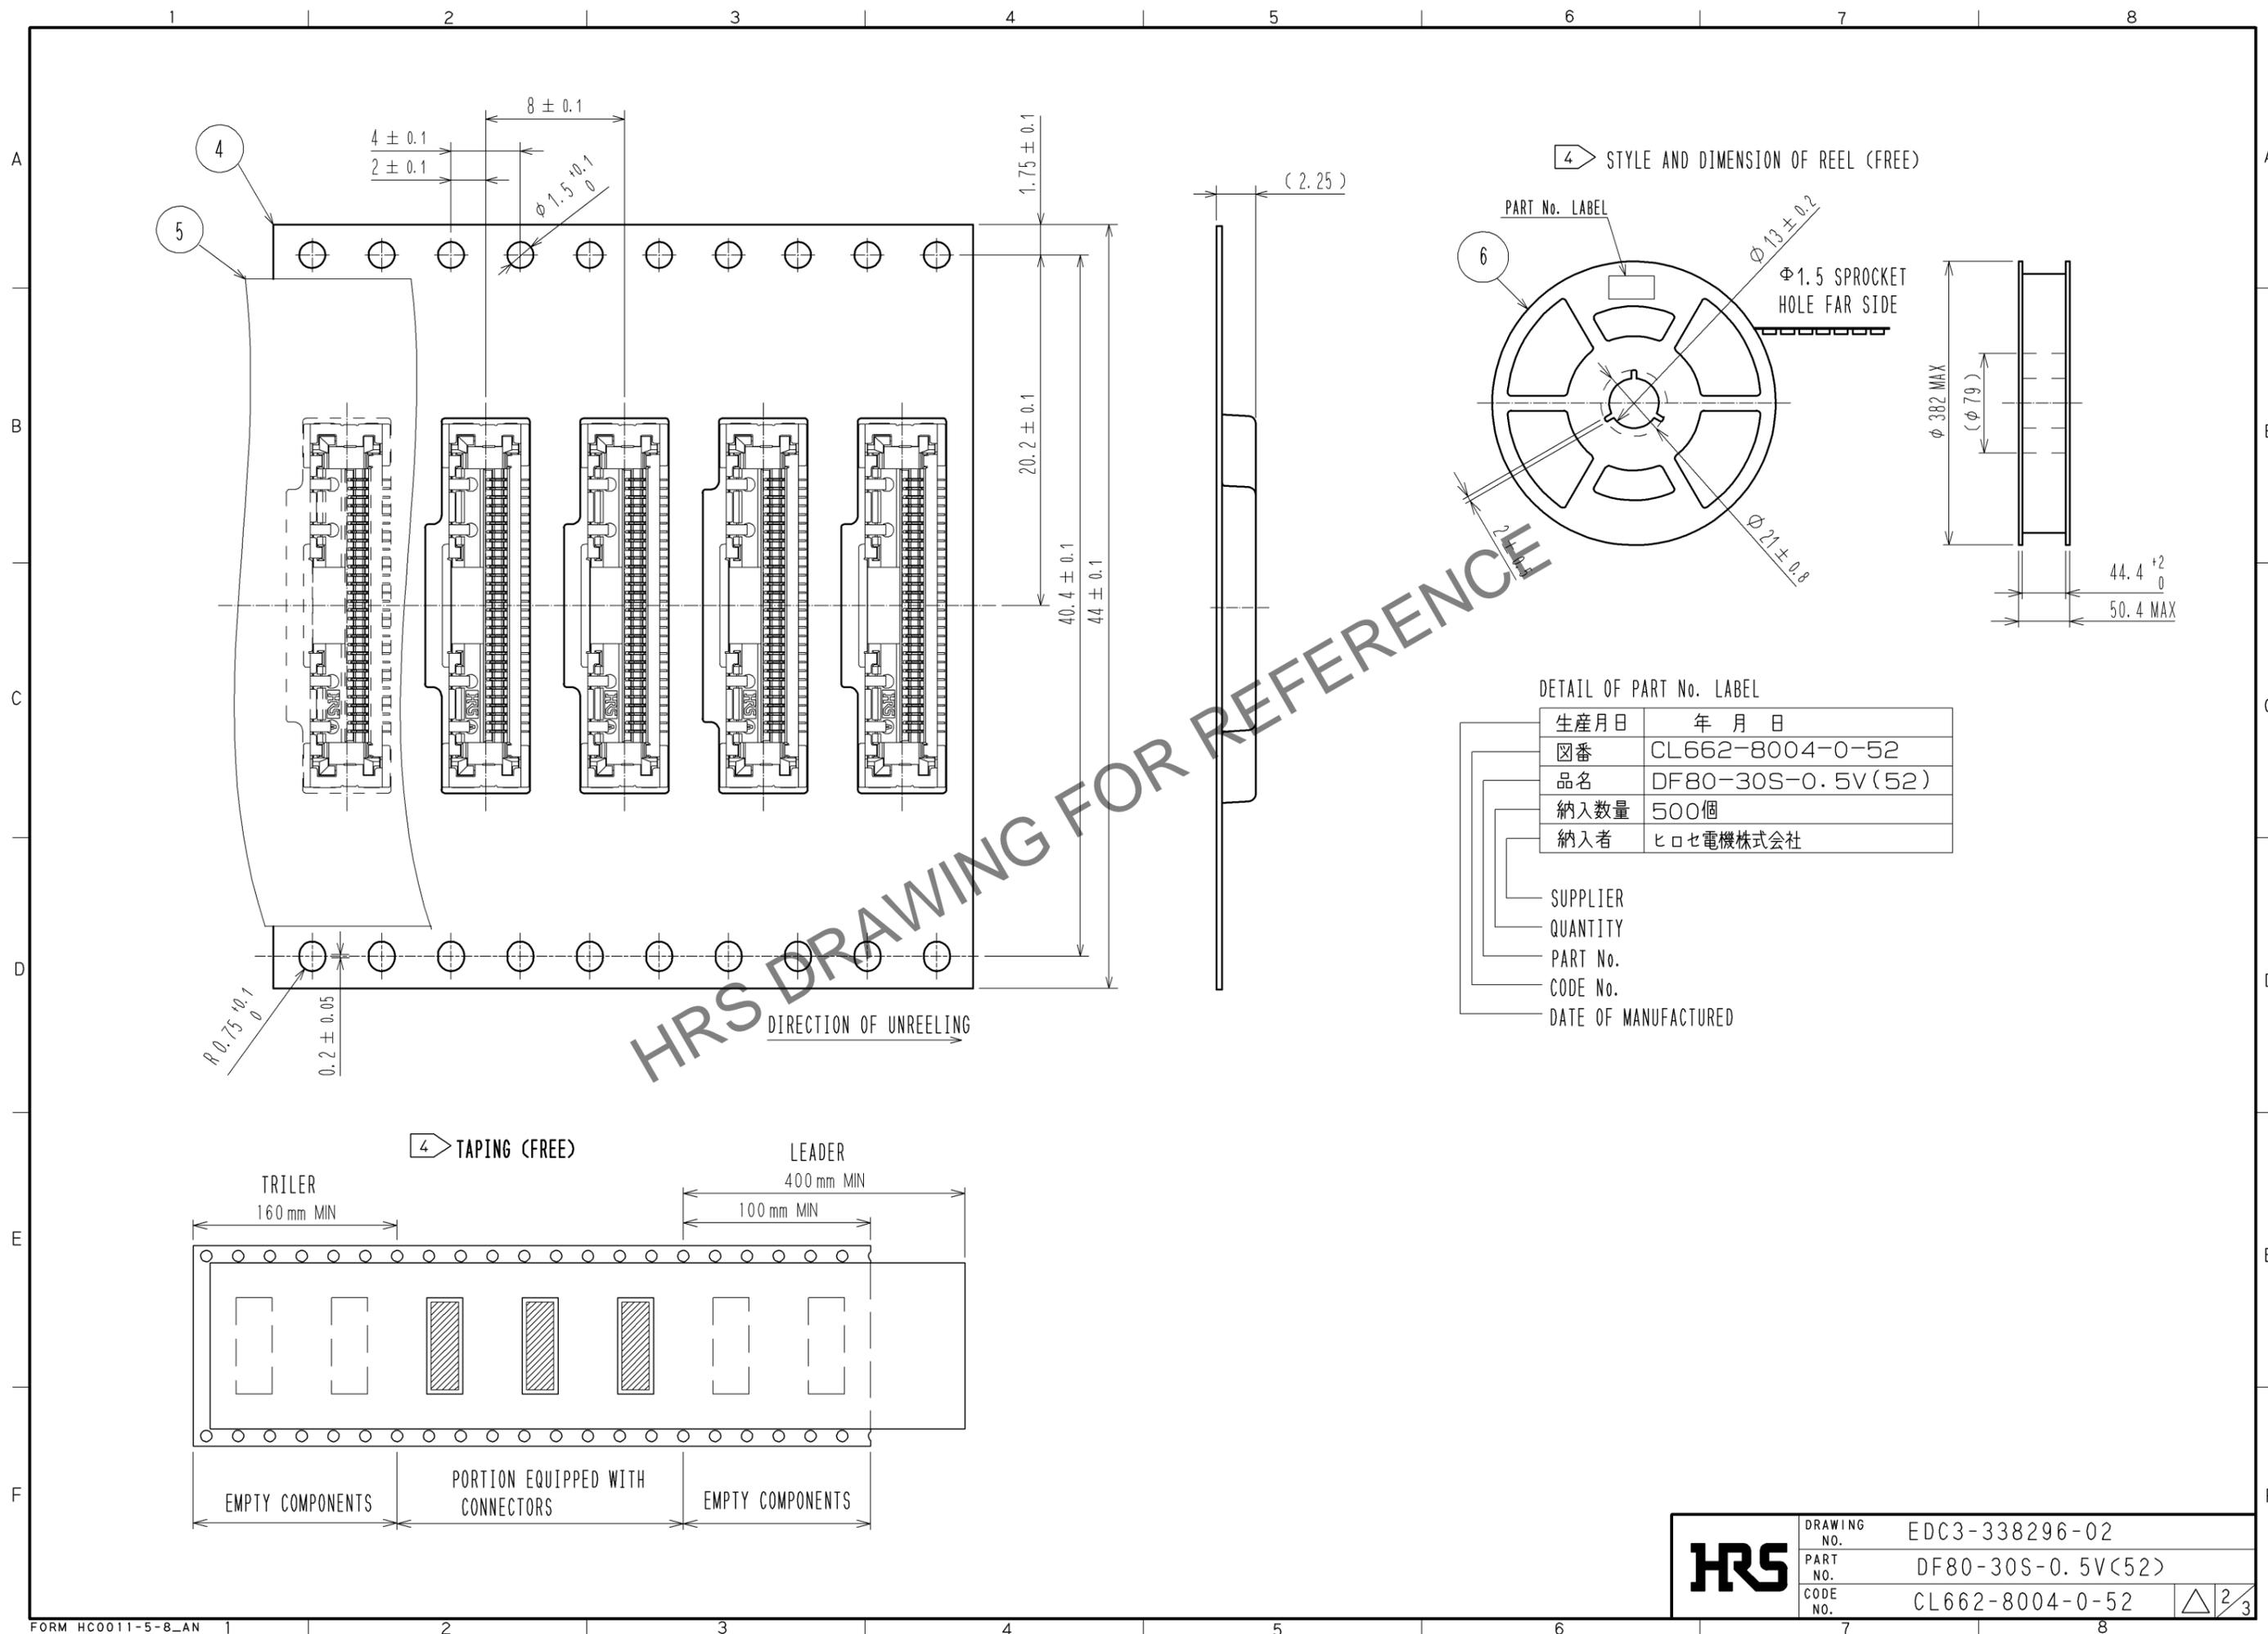

HRS	DRAWING NO.	EDC3-338296-02	△ 2/3
	PART NO.	DF80-30S-0.5V(52)	
	CODE NO.	CL662-8004-0-52	

Sep.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


[CONNECTOR INSERTION]

1. ALIGN THE PLUG CONNECTOR TO THE GUIDES ON PCB CONNECTOR AND INSERT.
2. APPLY EVEN FORCE TO THE PLUG CONNECTOR SURFACE AND FEEL TACTILE CLICK FOR COMPLETE LOCK.


SUPPLEMENTATION

TOTAL HEIGHT IS KEPT WITHIN THE HEIGHT OF MATED CONNECTORS BY LAYING DOWN THE PULL TAB AS SHOWN.


PROCEDURE 1

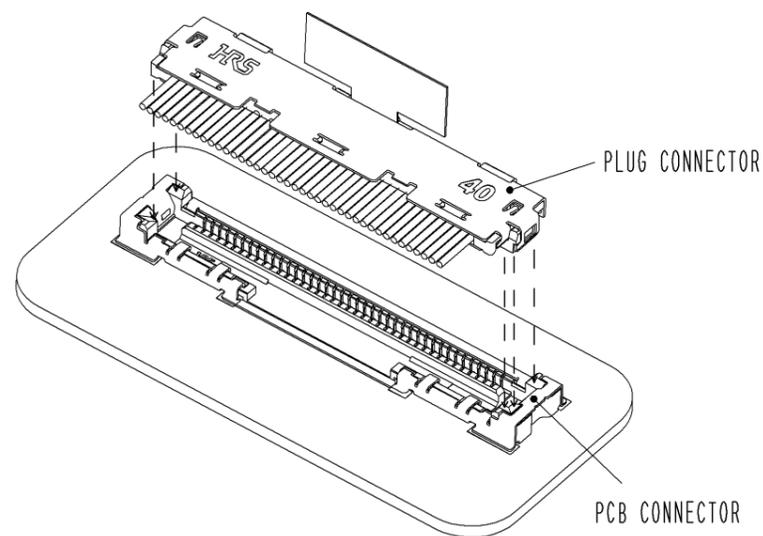

PROCEDURE 2

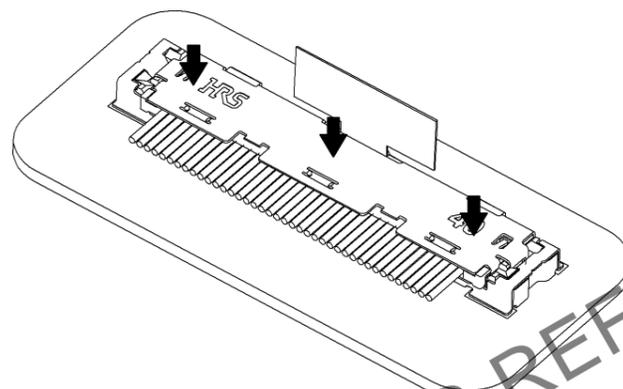

SUPPLEMENTATION :
METHOD OF STORING PULL TAB

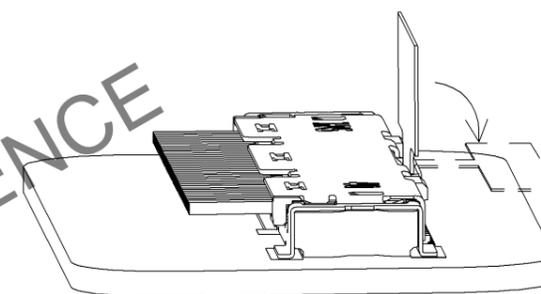


[CONNECTOR WITHDRAWAL]

<WITH PULL TAB>


BY PULLING UP THE TAB TO THE DIRECTION INDICATED WITH THE ARROW, PLUG CONNECTOR IS RELEASED.

<WITHOUT PULL TAB>

BY HOOKING THE PLUG CONNECTOR AT THE POSITION SHOWN WITH FINGER AND PULLING UP, PLUG CONNECTOR IS RELEASED.

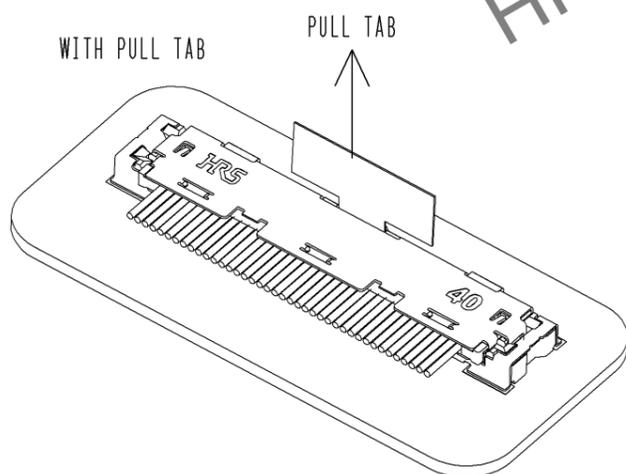

WITHOUT PULL TAB

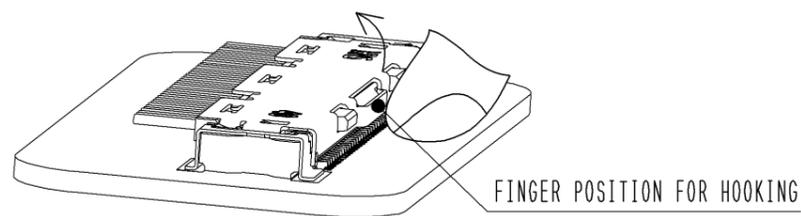

HRS DRAWING FOR REFERENCE

HRS	DRAWING NO.	EDC3-338296-02
	PART NO.	DF80-30S-0.5V(52)
	CODE NO.	CL662-8004-0-52
		△ 3/3