

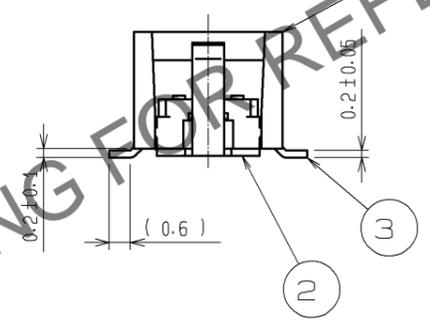
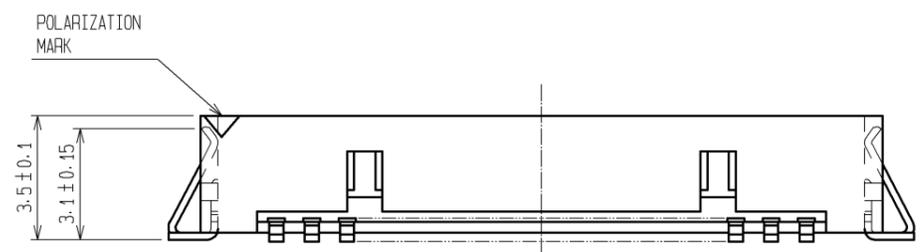
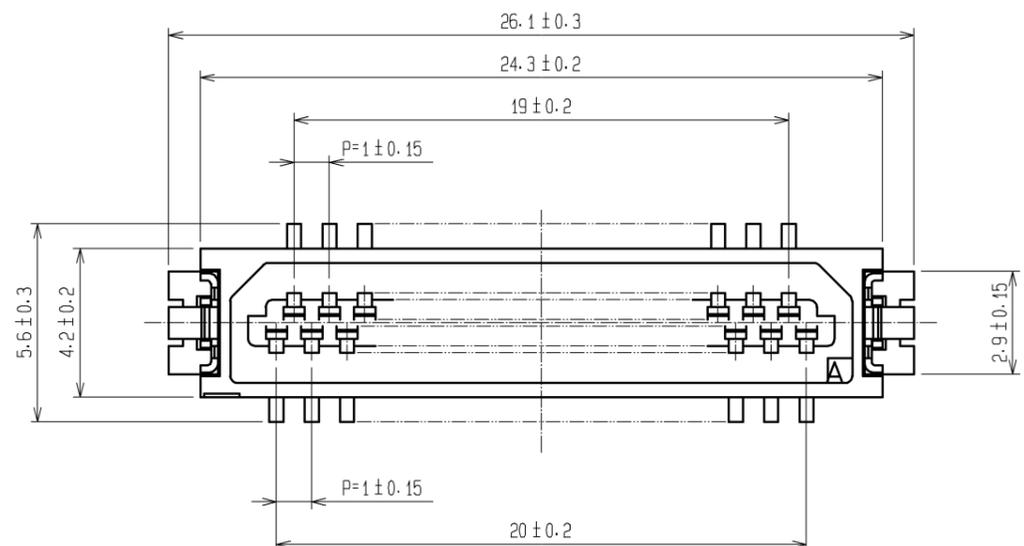



Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

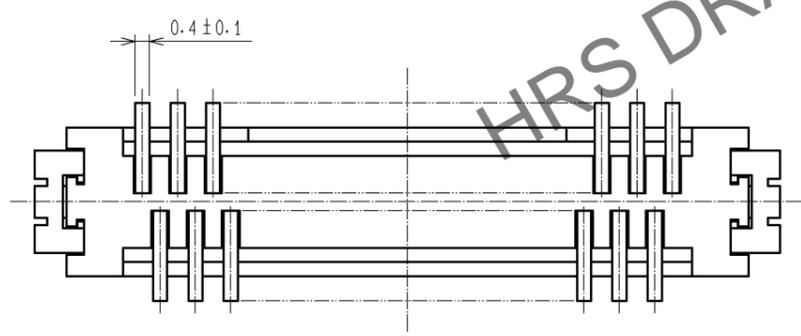

RECOMMENDED PATTERN

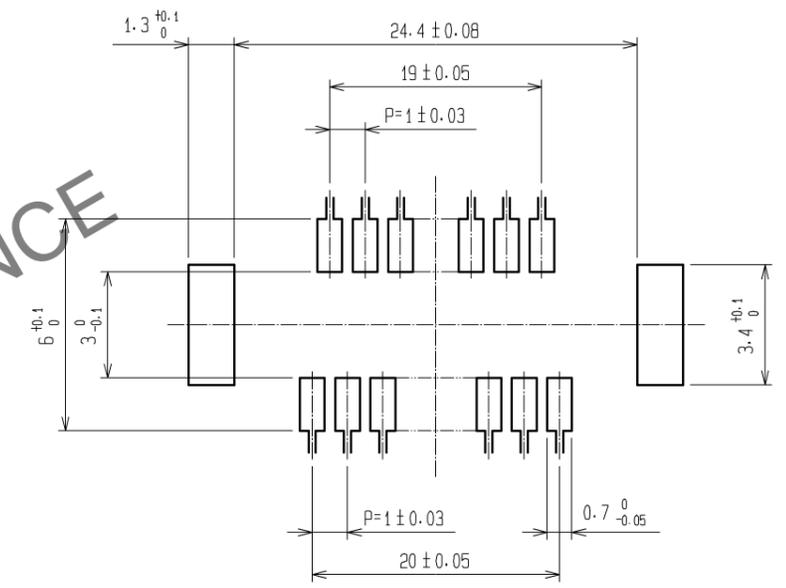


MATED CONNECTORS

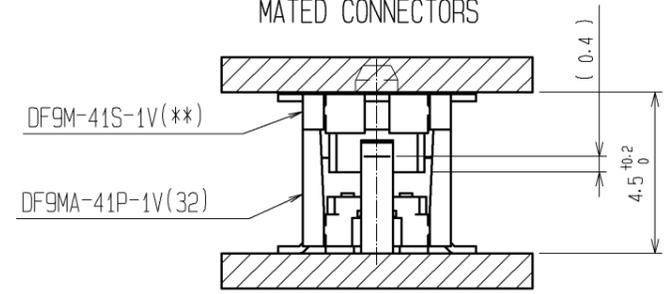


3	PHOSPHOR BRONZE	TIN PLATED (HOT-DIP) 1μm min	7	PS	PLASTIC REEL-BLACK
2	PHOSPHOR BRONZE	TIN PLATED (REFLOW FINISHED)1μm min.	6	POLYIMIDE	BROWN(HEAT-RESISTANT TAPE)
1	POLYAMIDE	BEIGE, UL94V-0	5	POLYESTER	CLEAR(COVER TAPE)
			4	PS	CLEAR(EMBOSSD CARRIER TAPE)
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

UNITS mm		SCALE 5 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : KH. IKEDA	10.11.30	DRAWING NO.	EDC3-160519-10		
		CHECKED : TS. MIYAZAKI	10.11.30	PART NO.	DF9MA-41P-1V(32)		
		DESIGNED : YN. SAKAMOTO	10.11.30	CODE NO.	CL540-0230-0-32		
		DRAWN : YN. SAKAMOTO	10.11.30		1/2		

Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

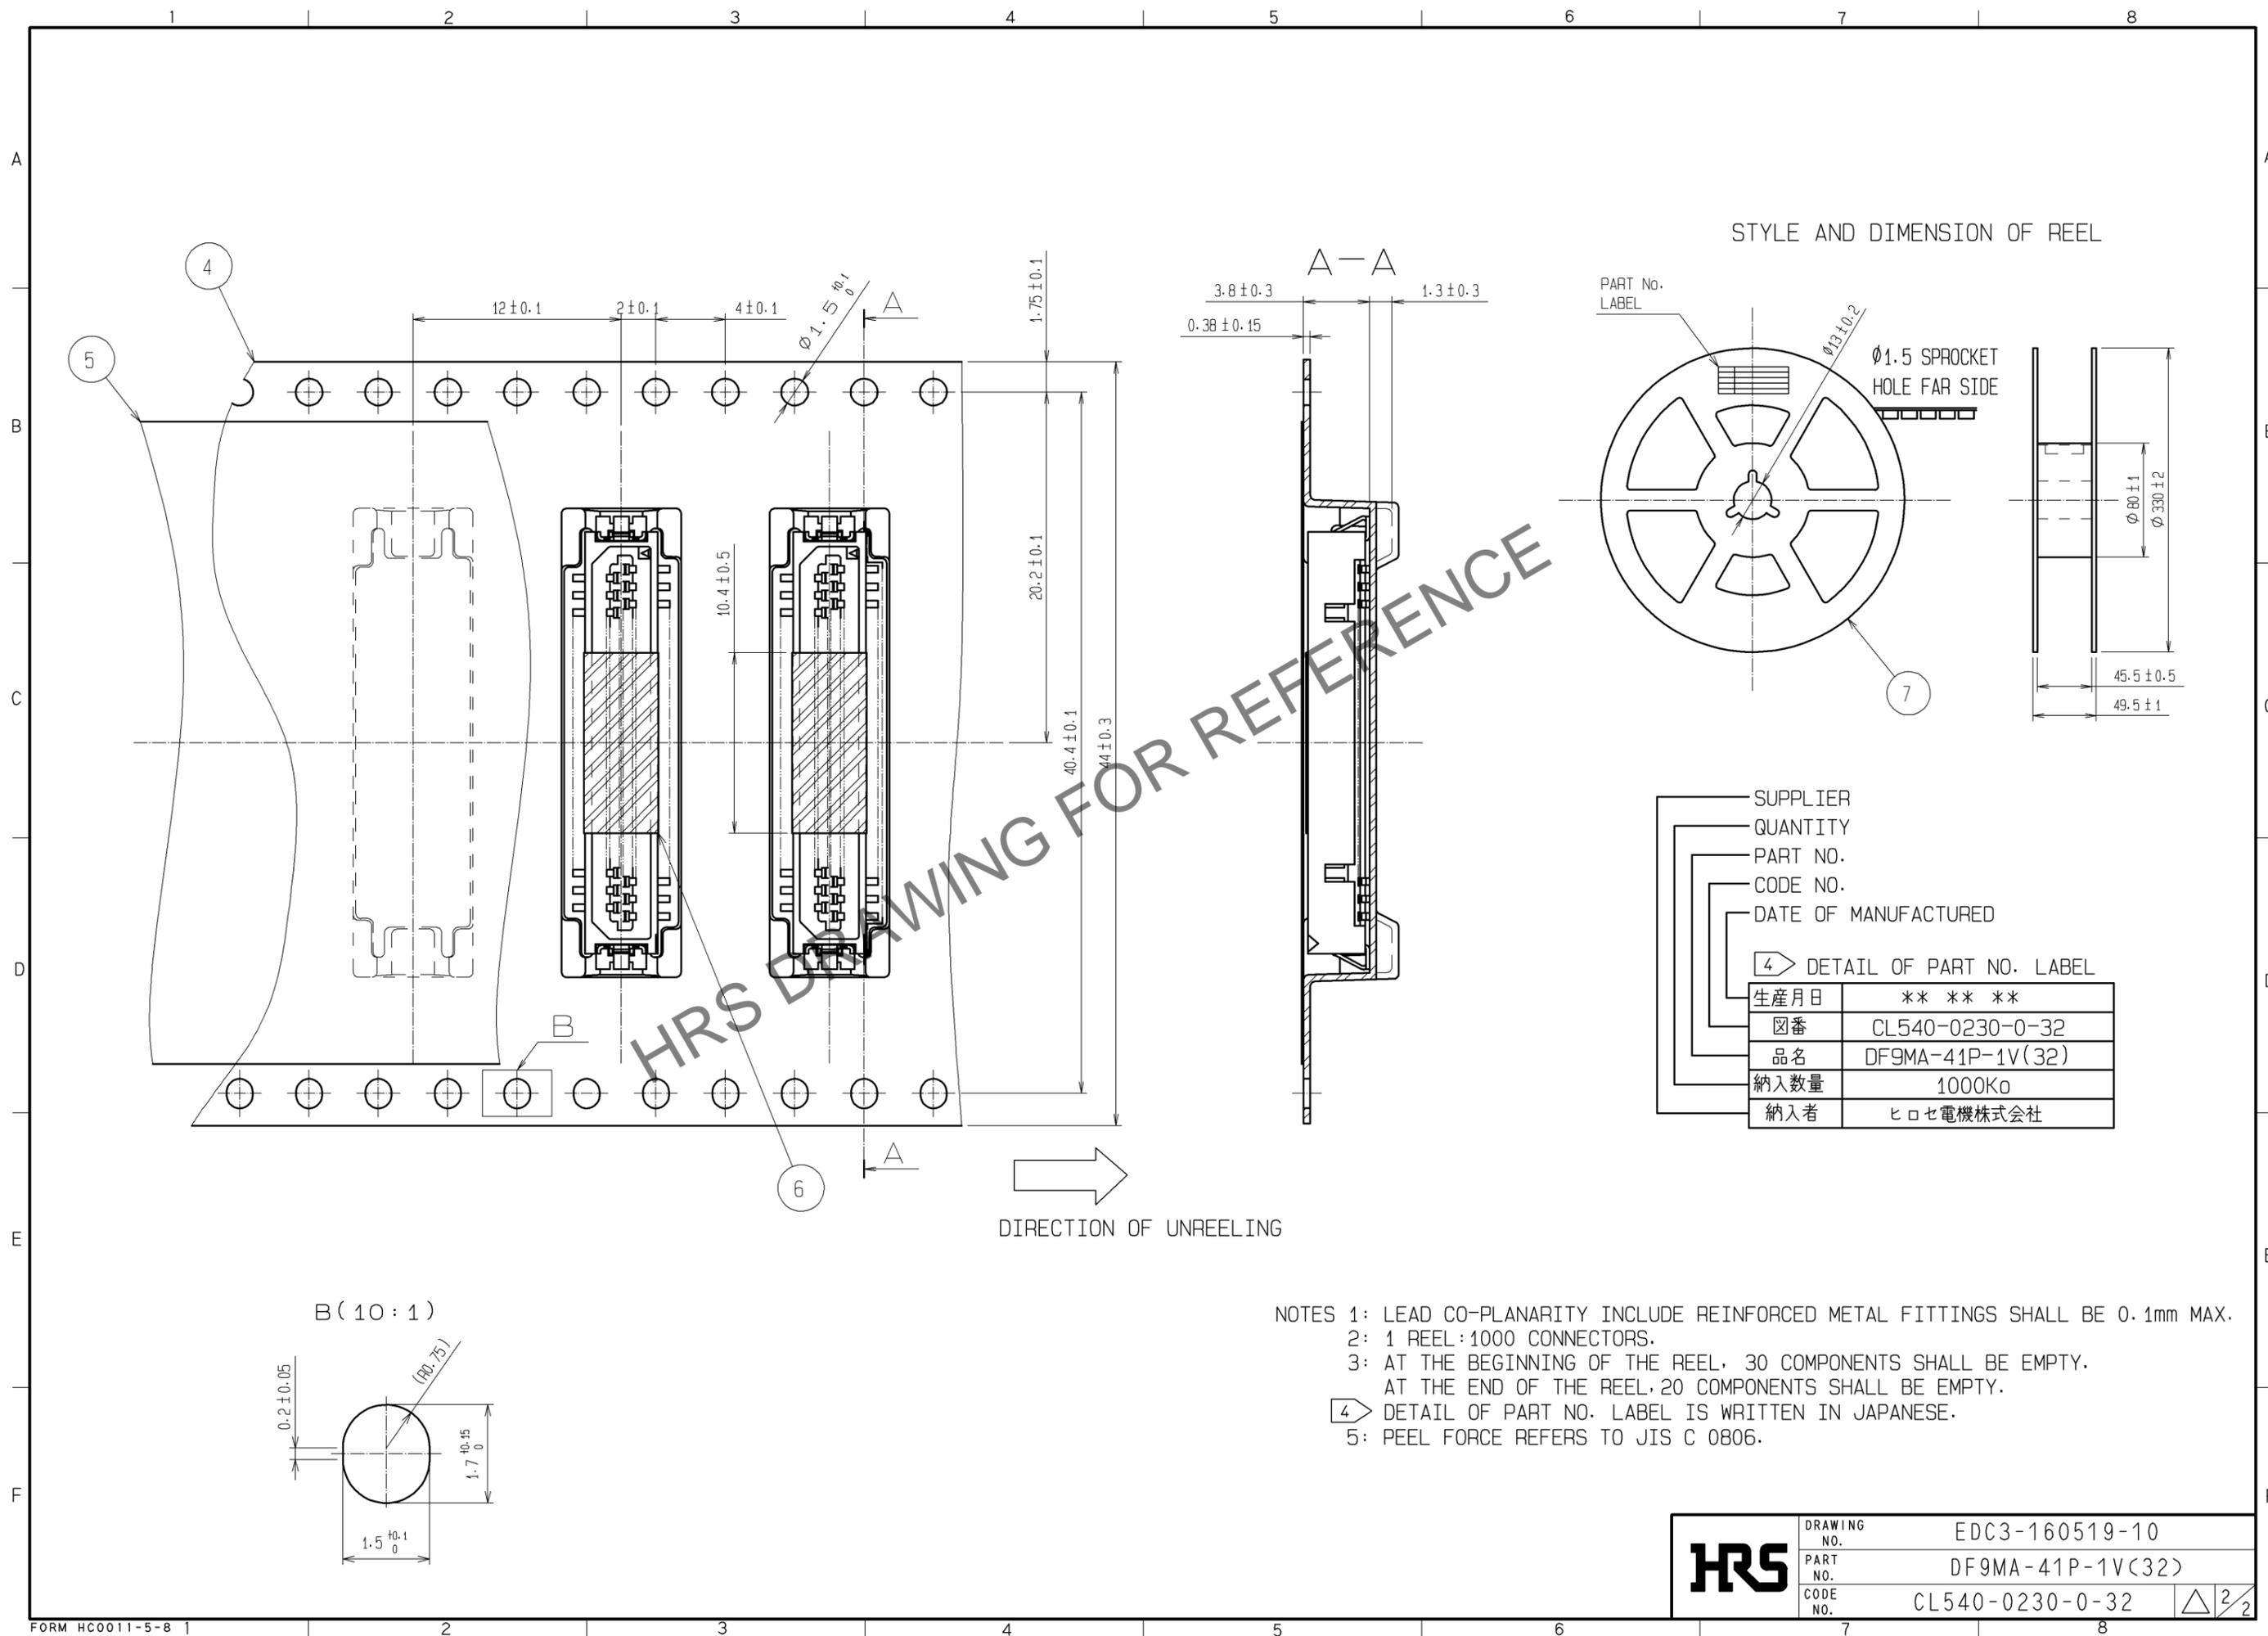

STYLE AND DIMENSION OF REEL

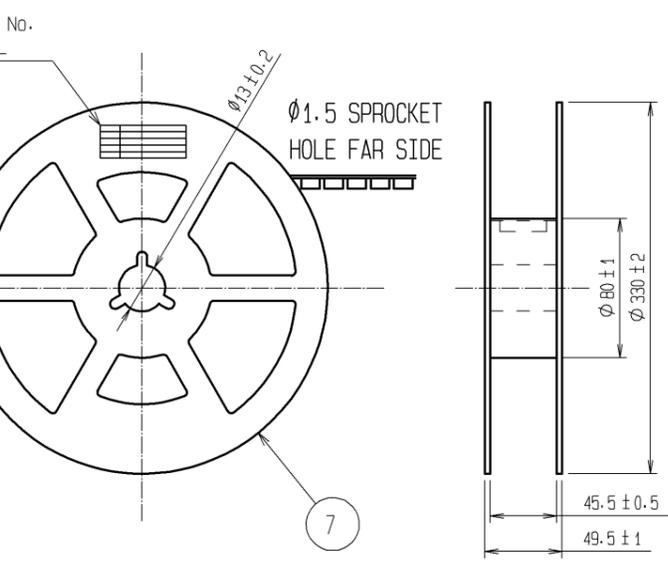

SUPPLIER
 QUANTITY
 PART NO.
 CODE NO.
 DATE OF MANUFACTURED
 4 DETAIL OF PART NO. LABEL

生産月日	** ** *
図番	CL540-0230-0-32
品名	DF9MA-41P-1V(32)
納入数量	1000Ko
納入者	ヒロセ電機株式会社

DIRECTION OF UNREELING

- NOTES 1: LEAD CO-PLANARITY INCLUDE REINFORCED METAL FITTINGS SHALL BE 0.1mm MAX.
 2: 1 REEL:1000 CONNECTORS.
 3: AT THE BEGINNING OF THE REEL, 30 COMPONENTS SHALL BE EMPTY.
 AT THE END OF THE REEL, 20 COMPONENTS SHALL BE EMPTY.
 4: DETAIL OF PART NO. LABEL IS WRITTEN IN JAPANESE.
 5: PEEL FORCE REFERS TO JIS C 0806.

HRS	DRAWING NO.	EDC3-160519-10
	PART NO.	DF9MA-41P-1V(32)
	CODE NO.	CL540-0230-0-32
		\triangle 2/2