


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

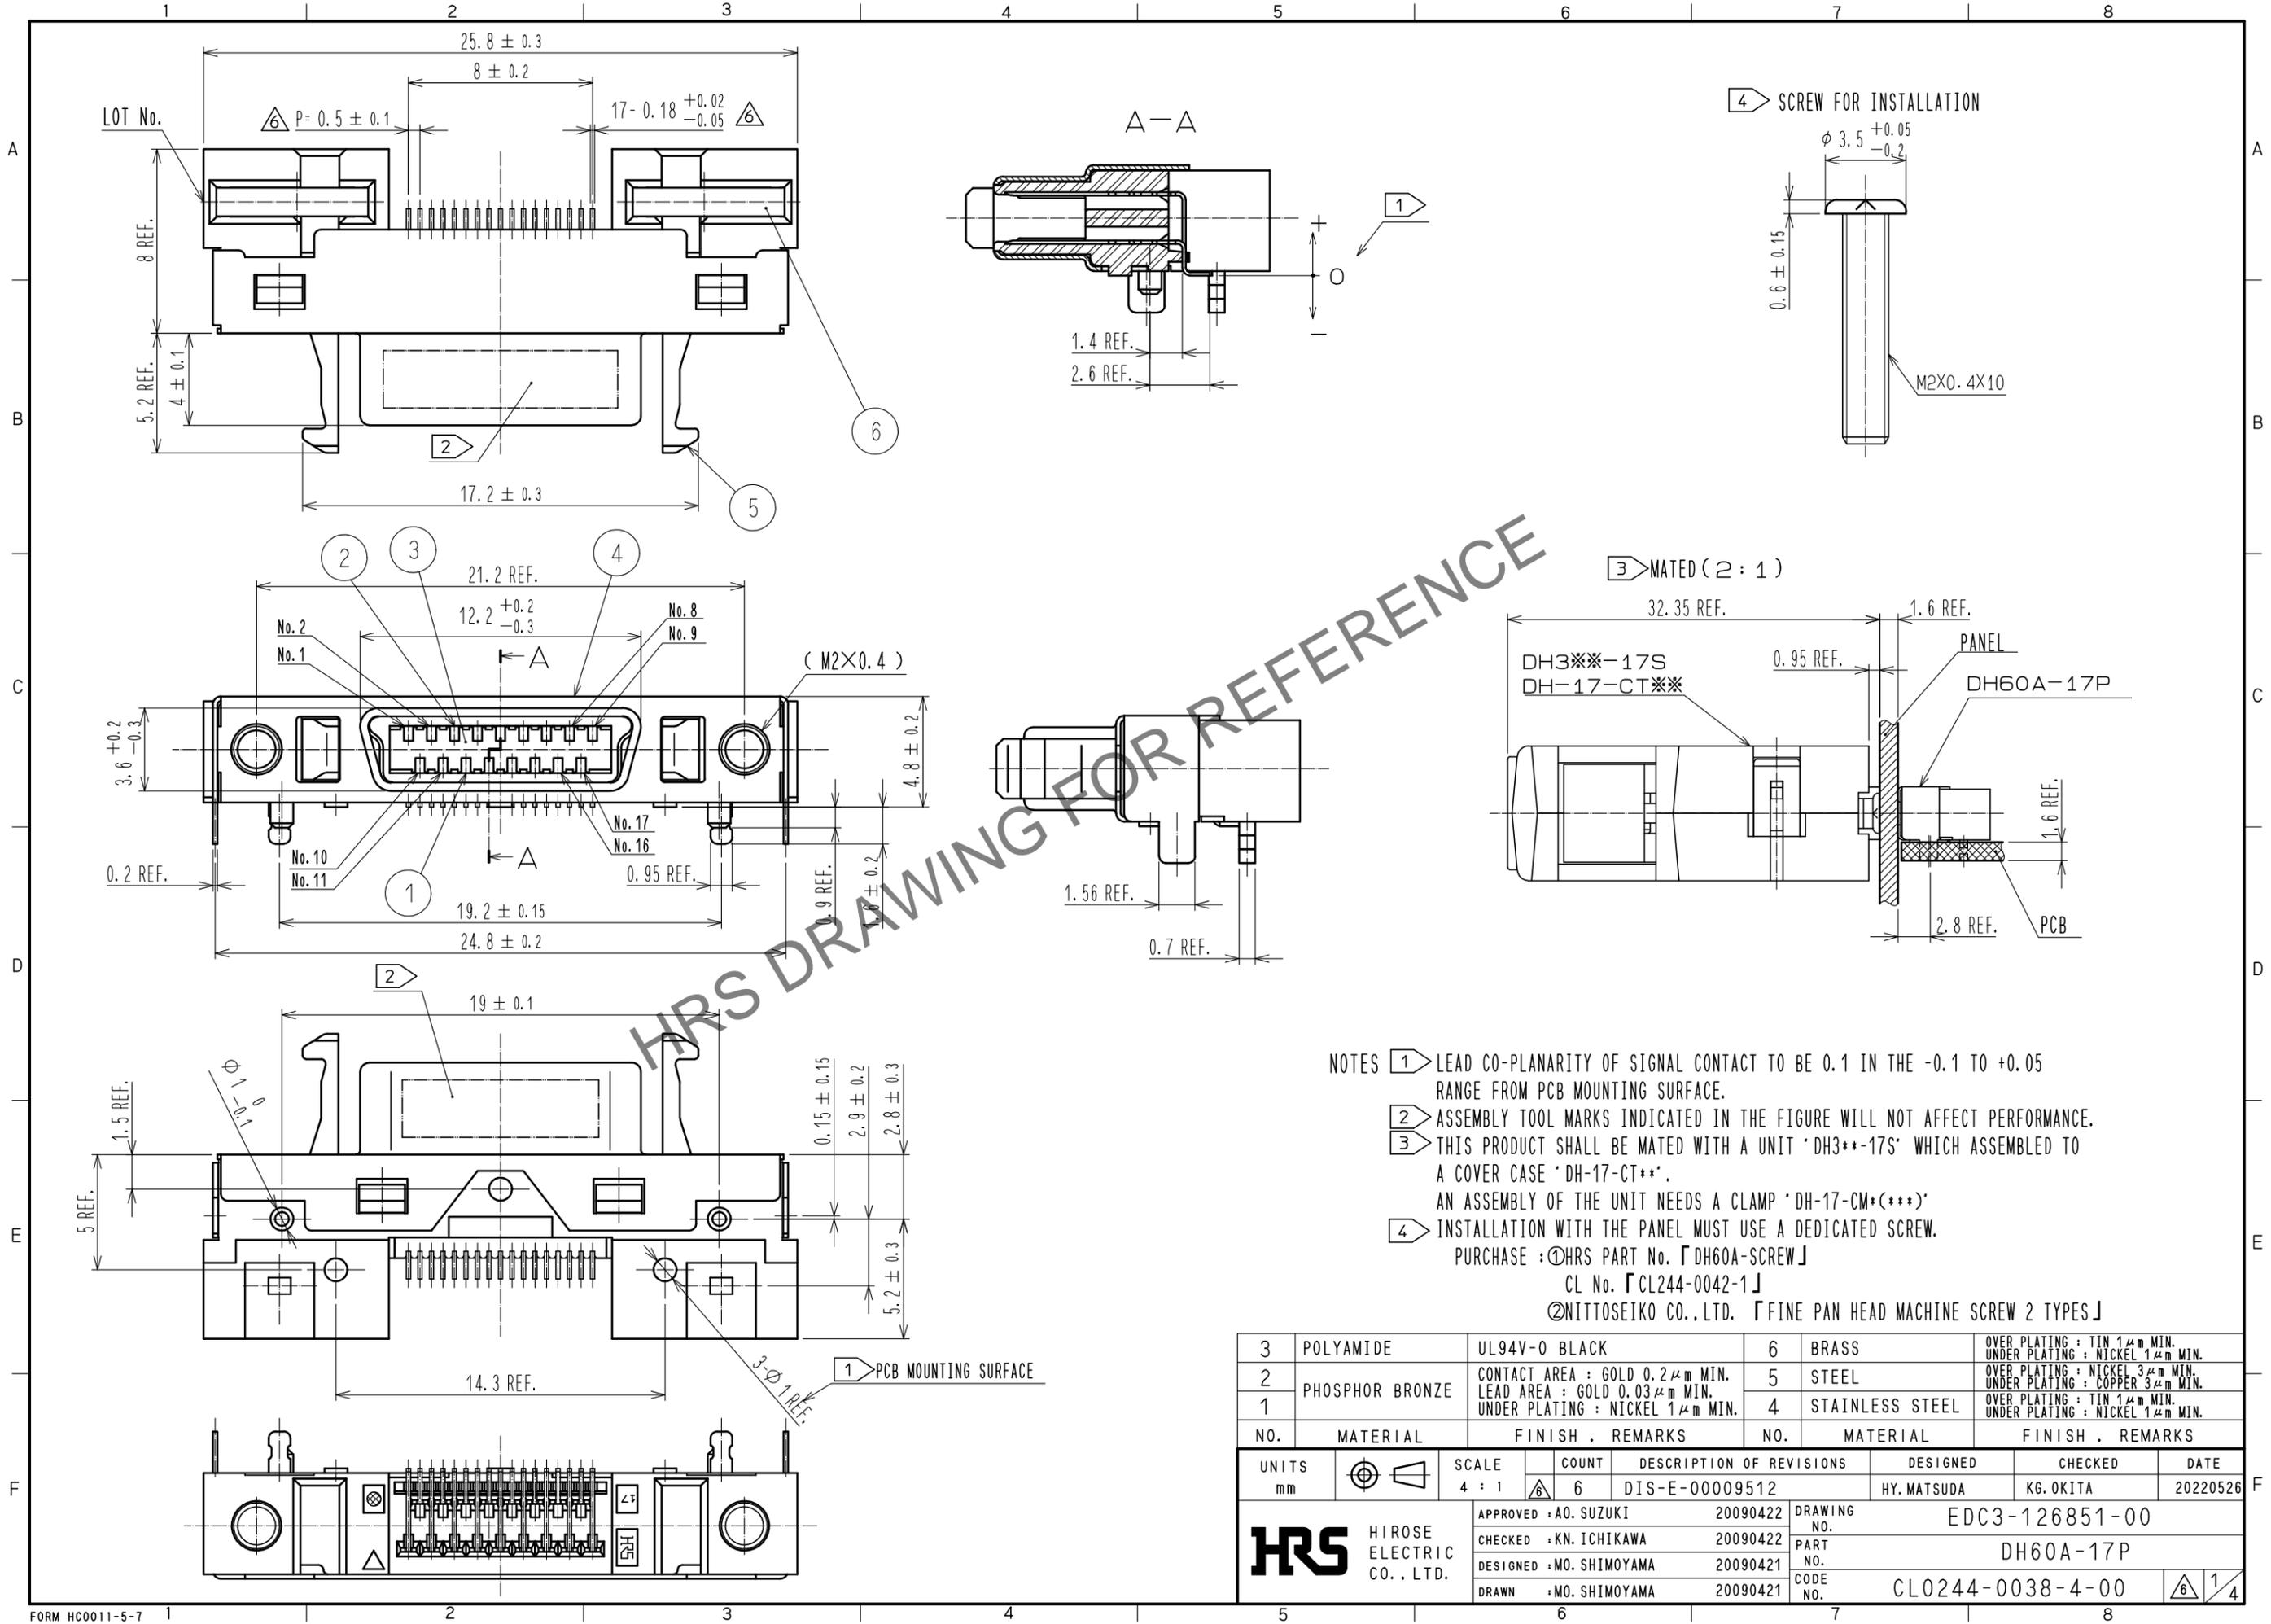


HRS DRAWING FOR REFERENCE

- NOTES
- ① LEAD CO-PLANARITY OF SIGNAL CONTACT TO BE 0.1 IN THE -0.1 TO +0.05 RANGE FROM PCB MOUNTING SURFACE.
 - ② ASSEMBLY TOOL MARKS INDICATED IN THE FIGURE WILL NOT AFFECT PERFORMANCE.
 - ③ THIS PRODUCT SHALL BE MATED WITH A UNIT 'DH3+-17S' WHICH ASSEMBLED TO A COVER CASE 'DH-17-CT**'.
AN ASSEMBLY OF THE UNIT NEEDS A CLAMP 'DH-17-CM*(***)'
 - ④ INSTALLATION WITH THE PANEL MUST USE A DEDICATED SCREW.
PURCHASE : ①HRS PART No. 「DH60A-SCREW」
CL No. 「CL244-0042-1」
②NITTOSEIKO CO.,LTD. 「FINE PAN HEAD MACHINE SCREW 2 TYPES」

3	POLYAMIDE	UL94V-0 BLACK	6	BRASS	OVER PLATING : TIN 1μm MIN. UNDER PLATING : NICKEL 1μm MIN.
2	PHOSPHOR BRONZE	CONTACT AREA : GOLD 0.2μm MIN. LEAD AREA : GOLD 0.03μm MIN. UNDER PLATING : NICKEL 1μm MIN.	5	STEEL	OVER PLATING : NICKEL 3μm MIN. UNDER PLATING : COPPER 3μm MIN.
1			4	STAINLESS STEEL	OVER PLATING : TIN 1μm MIN. UNDER PLATING : NICKEL 1μm MIN.
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS	mm	SCALE	4 : 1	COUNT	6
		DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
		DIS-E-00009512	HY. MATSUDA	KG. OKITA	20220526
APPROVED : AO. SUZUKI		20090422	DRAWING NO. EDC3-126851-00		
CHECKED : KN. ICHIKAWA		20090422	PART NO. DH60A-17P		
DESIGNED : MO. SHIMOYAMA		20090421	CODE NO. CL0244-0038-4-00		
DRAWN : MO. SHIMOYAMA		20090421	①/④		




Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

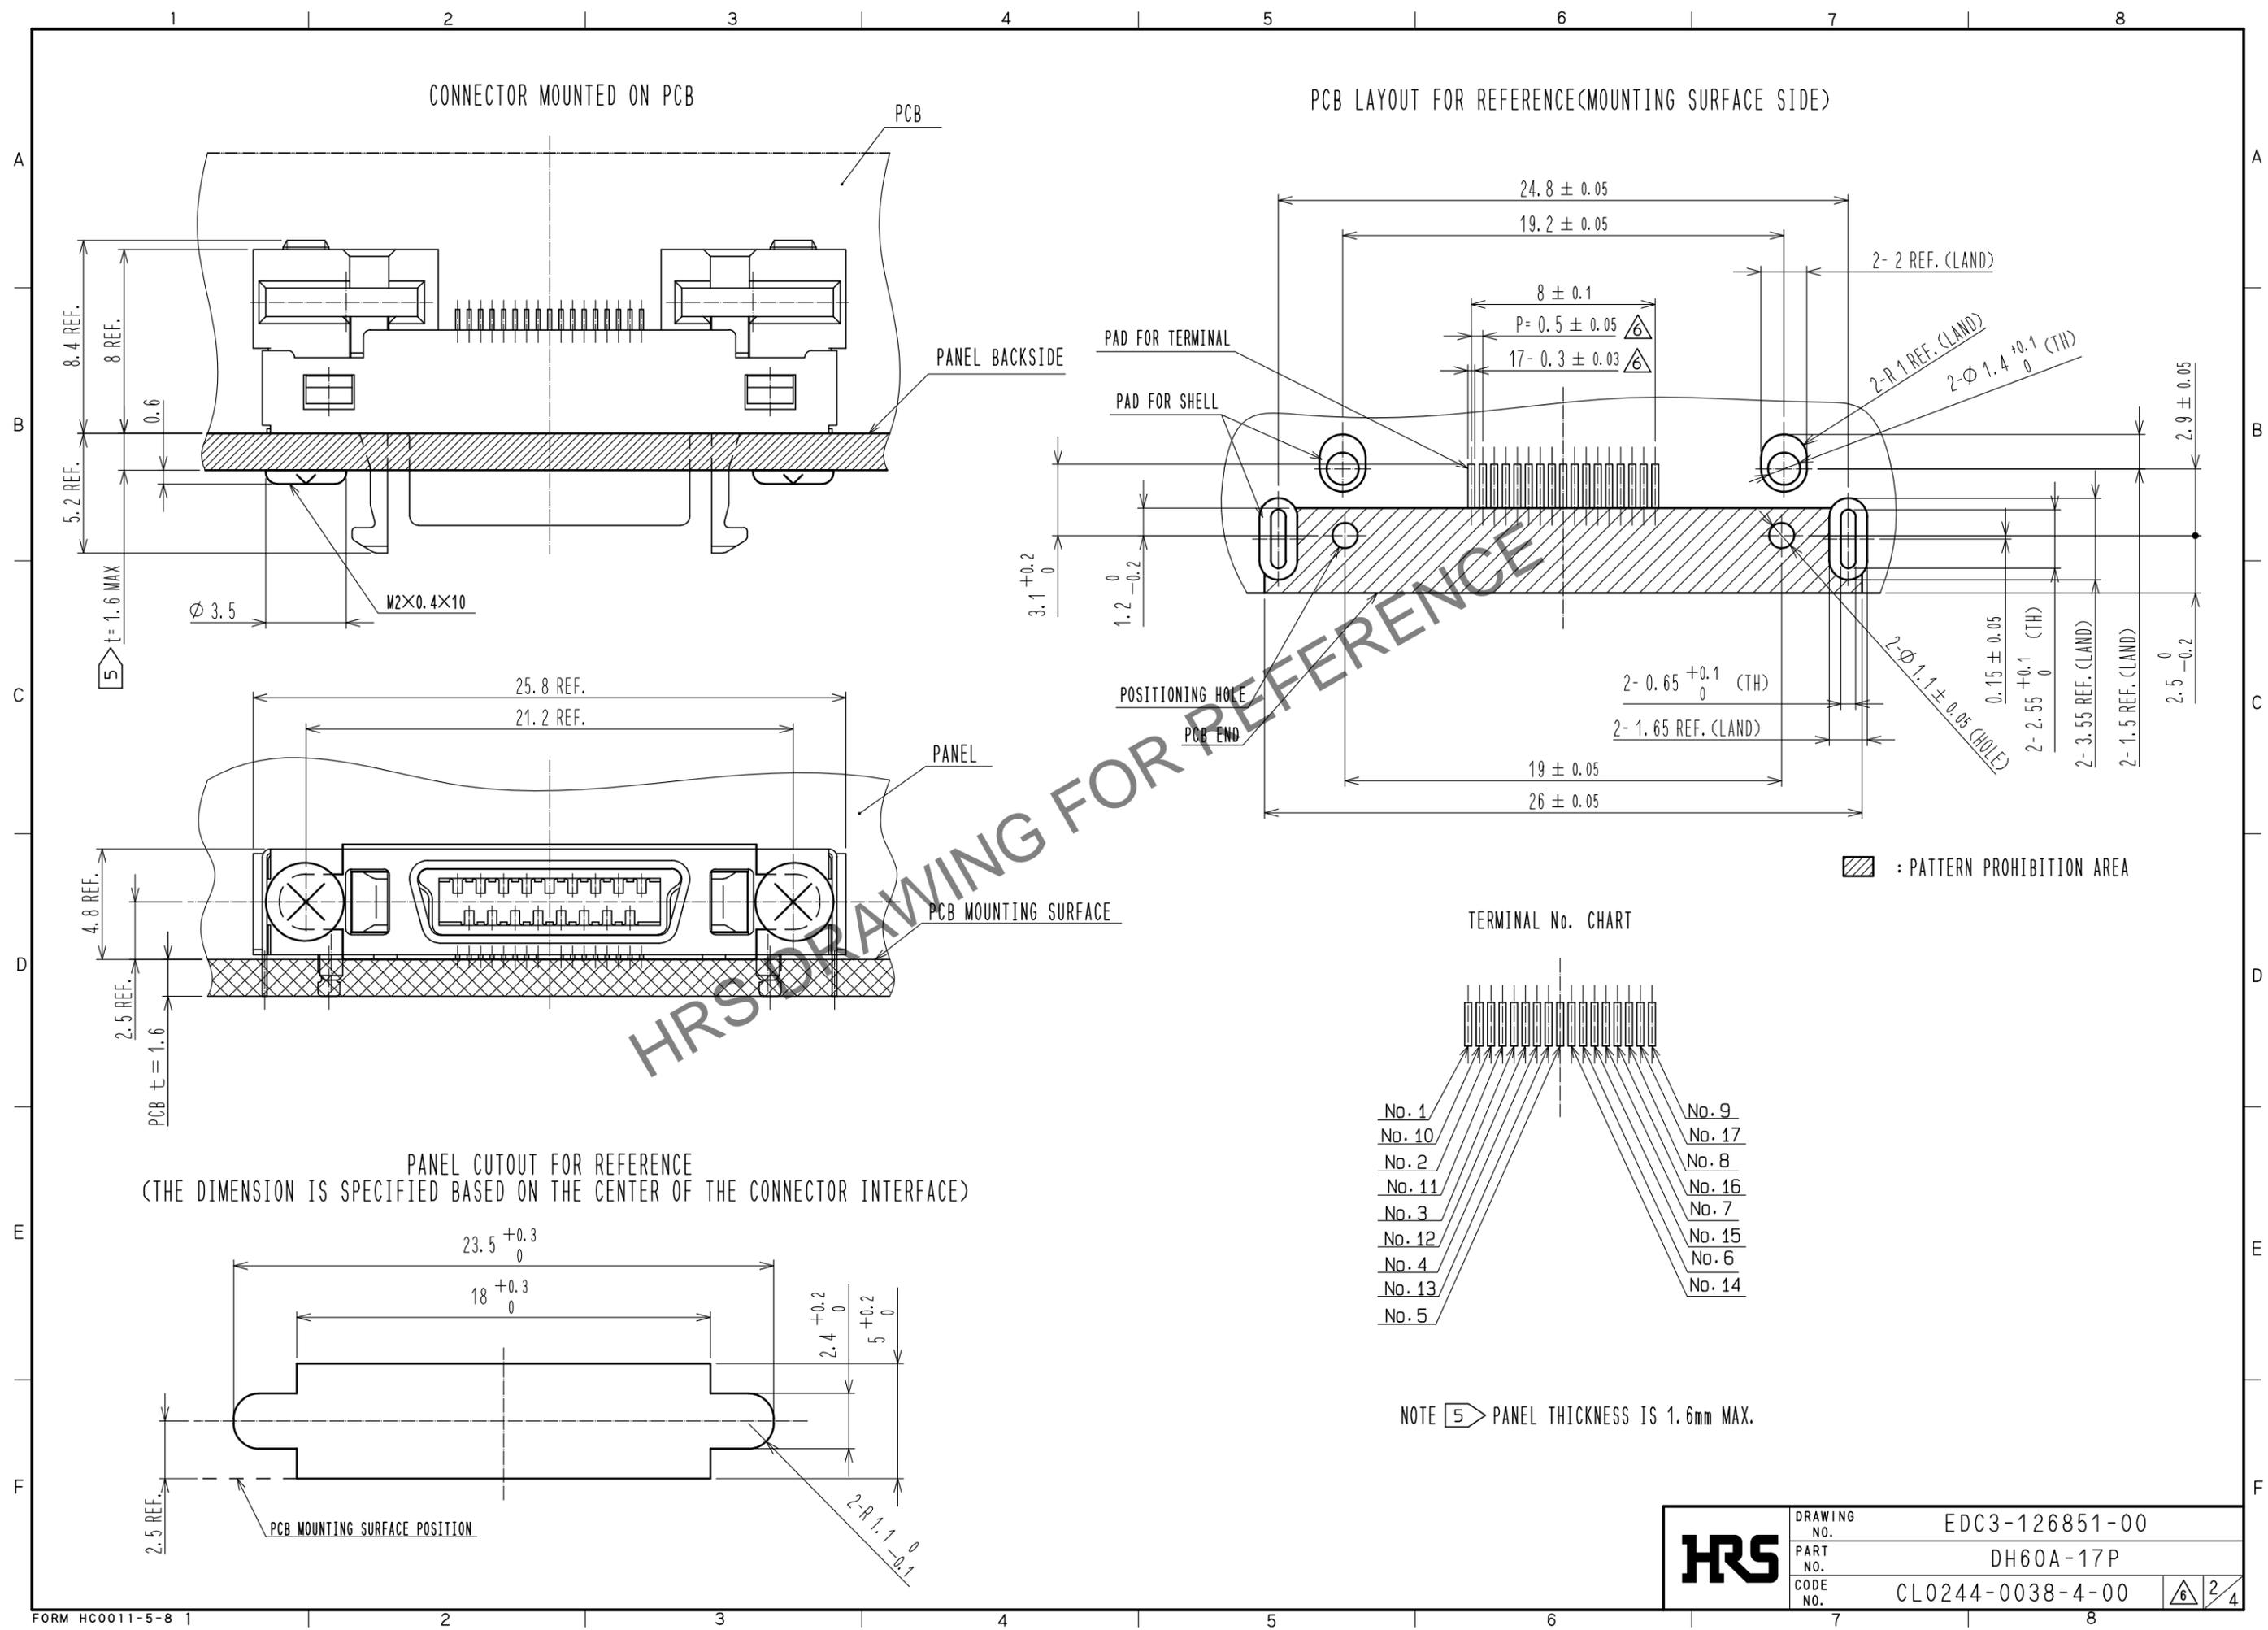

HRS	DRAWING NO.	EDC3-126851-00
	PART NO.	DH60A-17P
	CODE NO.	CLO244-0038-4-00
		[6] [2] [4]

Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

DRAWING FOR PACKING(FREE)

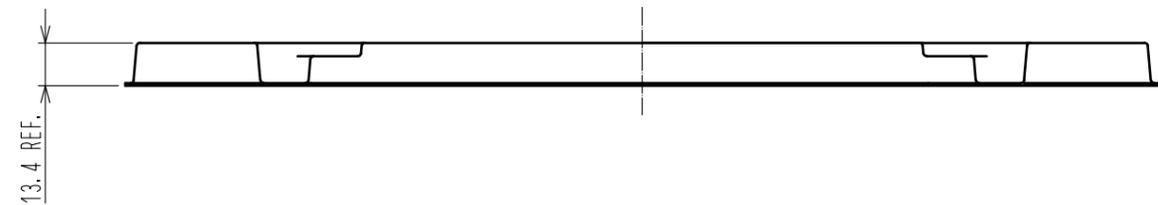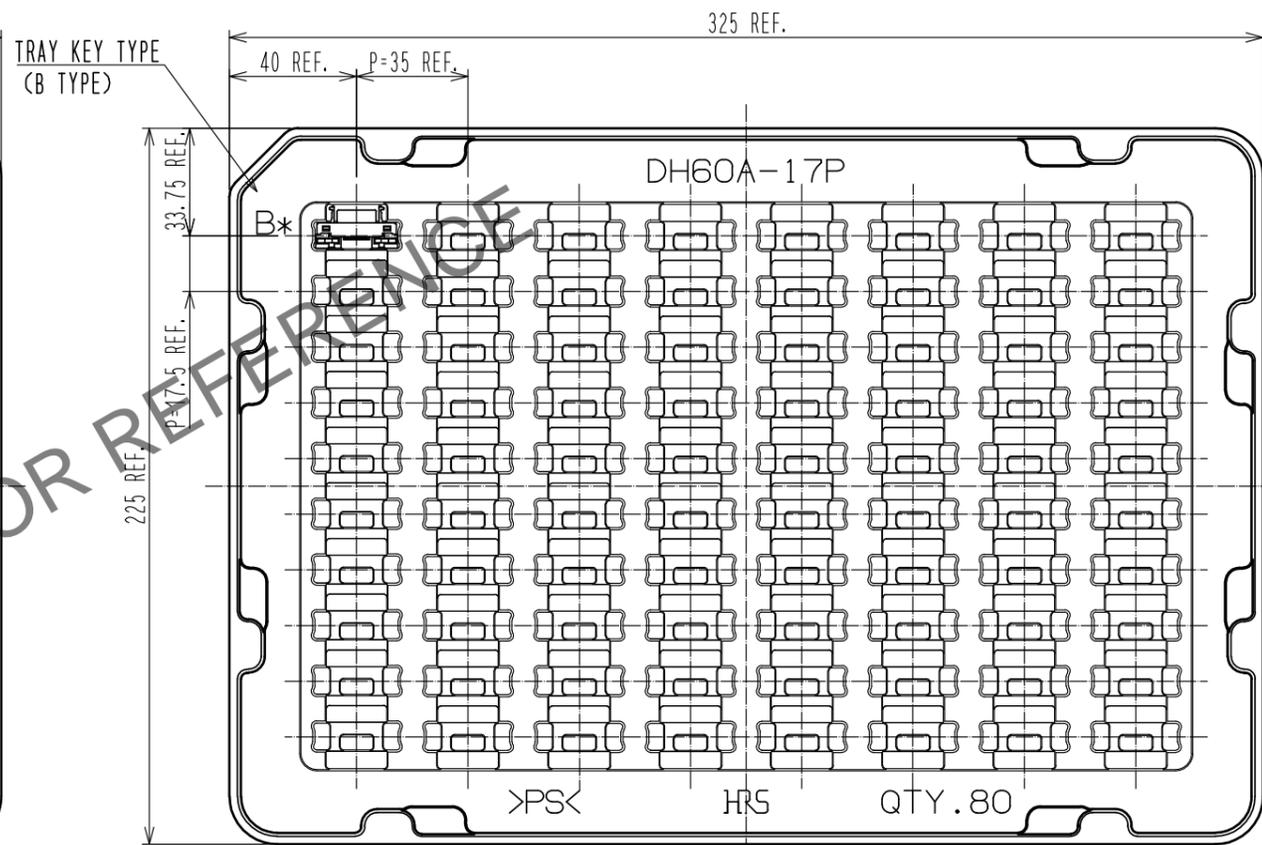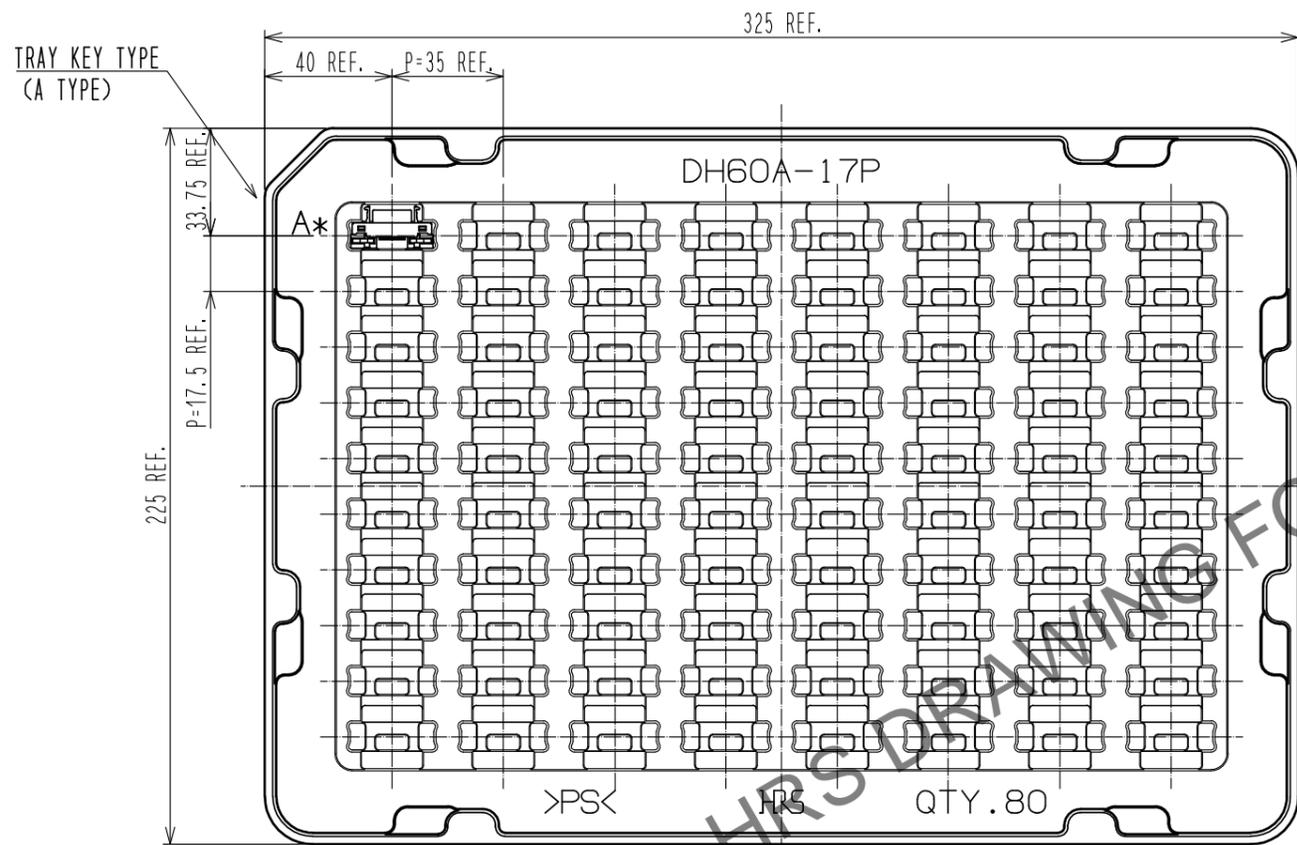


※TRAYS. A TYPE AND B TYPE. ARE PILED UP ALTERNATELY.

HRS	DRAWING NO.	EDC3-126851-00
	PART NO.	DH60A-17P
	CODE NO.	CL0244-0038-4-00
		3/4

Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

△ REFERENCE METAL MASK LAYOUT(2:1)
 (t=0.15)

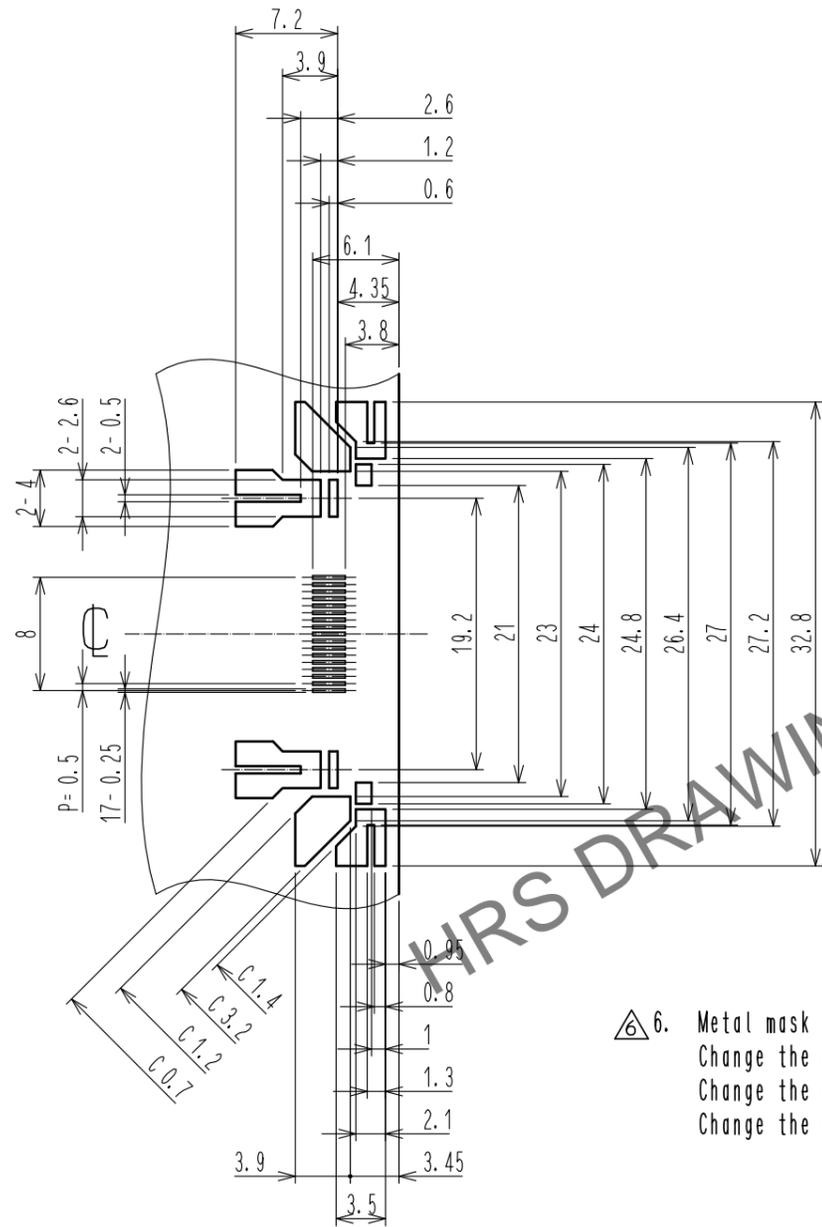

△ 6. Metal mask dimensions of the drawings described, are reference dimensions for 0.15 mm thickness metal mask.
 Change the metal mask dimensions by thickness of the metal mask, thickness of PCB, component of solder paste and mounting conditions.
 Change the metal mask dimensions in case of mounting DH**-**P in parallel.
 Change the metal mask dimensions, if there are other mounting parts or implementation pattern around the portion of mounting position of DH**-**P.

GENERAL TOLERANCE IS ± 0.05

HRS	DRAWING NO.	EDC3-126851-00
	PART NO.	DH60A-17P
	CODE NO.	CL0244-0038-4-00

△ 4/4