
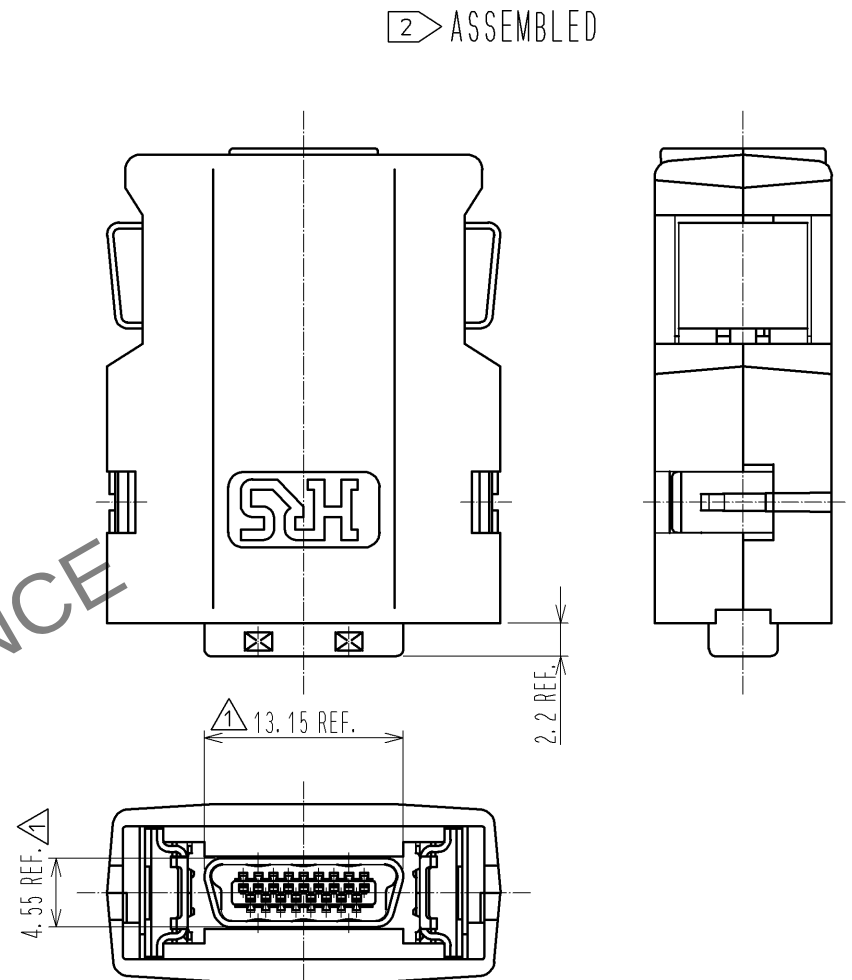
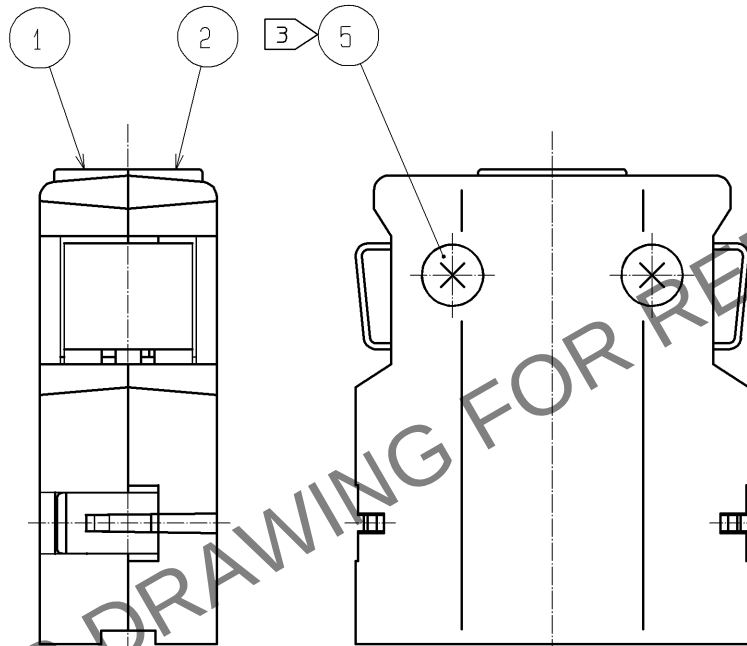
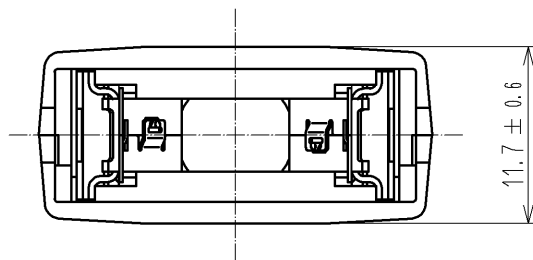
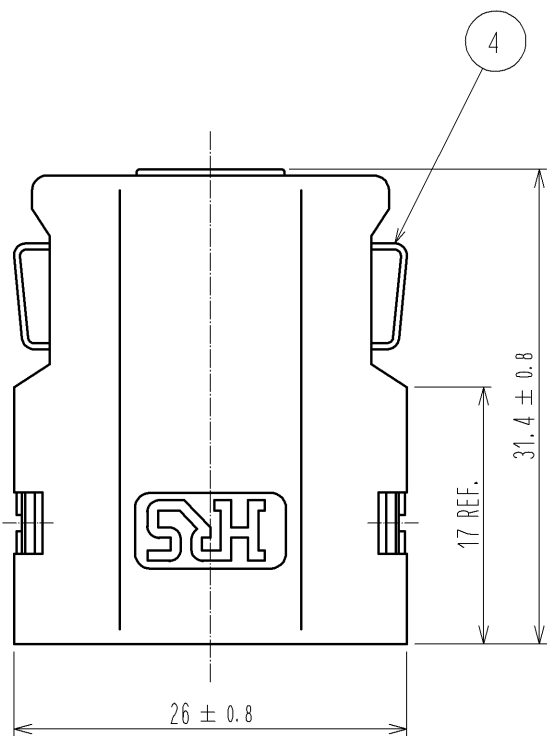
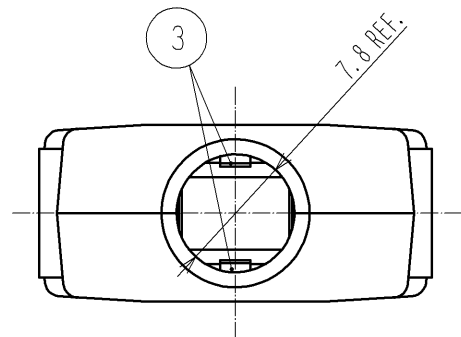



Dec.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



- NOTE 1 THIS PRODUCT IS DELIVERED SEPARATELY.
2 AS SHOWN IN THE FIGURE, THIS PRODUCT SHALL BE USED ASSEMBLED TO A CONNECTOR UNIT 'DH3+B-17S'.
A CLAMP 'DH-17-CMB(6.3)' IS NEEDED WHEN ASSEMBLING THE UNIT.
3 A RECOMMENDED SCREW TIGHTENING FOR COVERS TO BE FROM 0.1 TO 0.15 N · m.

				5		STEEL		TRIVALENT BLACK CHROMATE									
2	PC	UL94V-0 BLACK		4		STAINLESS STEEL											
1				3		STAINLESS STEEL		PLATING : NICKEL 0.1μm MIN.									
NO.		MATERIAL		FINISH , REMARKS		NO.		MATERIAL		FINISH , REMARKS							
UNITS mm				SCALE 2 : 1				COUNT 2		DESCRIPTION OF REVISIONS DIS-E-003061		DESIGNED TM. ONO		CHECKED KN. ICHIKAWA		DATE 09. 12. 14	
 HIROSE ELECTRIC CO., LTD.		APPROVED : A0. SUZUKI				09. 04. 22				DRAWING NO. EDC3-126852-00							
		CHECKED : KN. ICHIKAWA				09. 04. 22				PART NO. DH-17-CT1B							
		DESIGNED : MO. SHIMOYAMA				09. 04. 21				CODE NO. CL244-0039-7-00							
		DRAWN : MO. SHIMOYAMA				09. 04. 21											
																1/2	

Dec.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

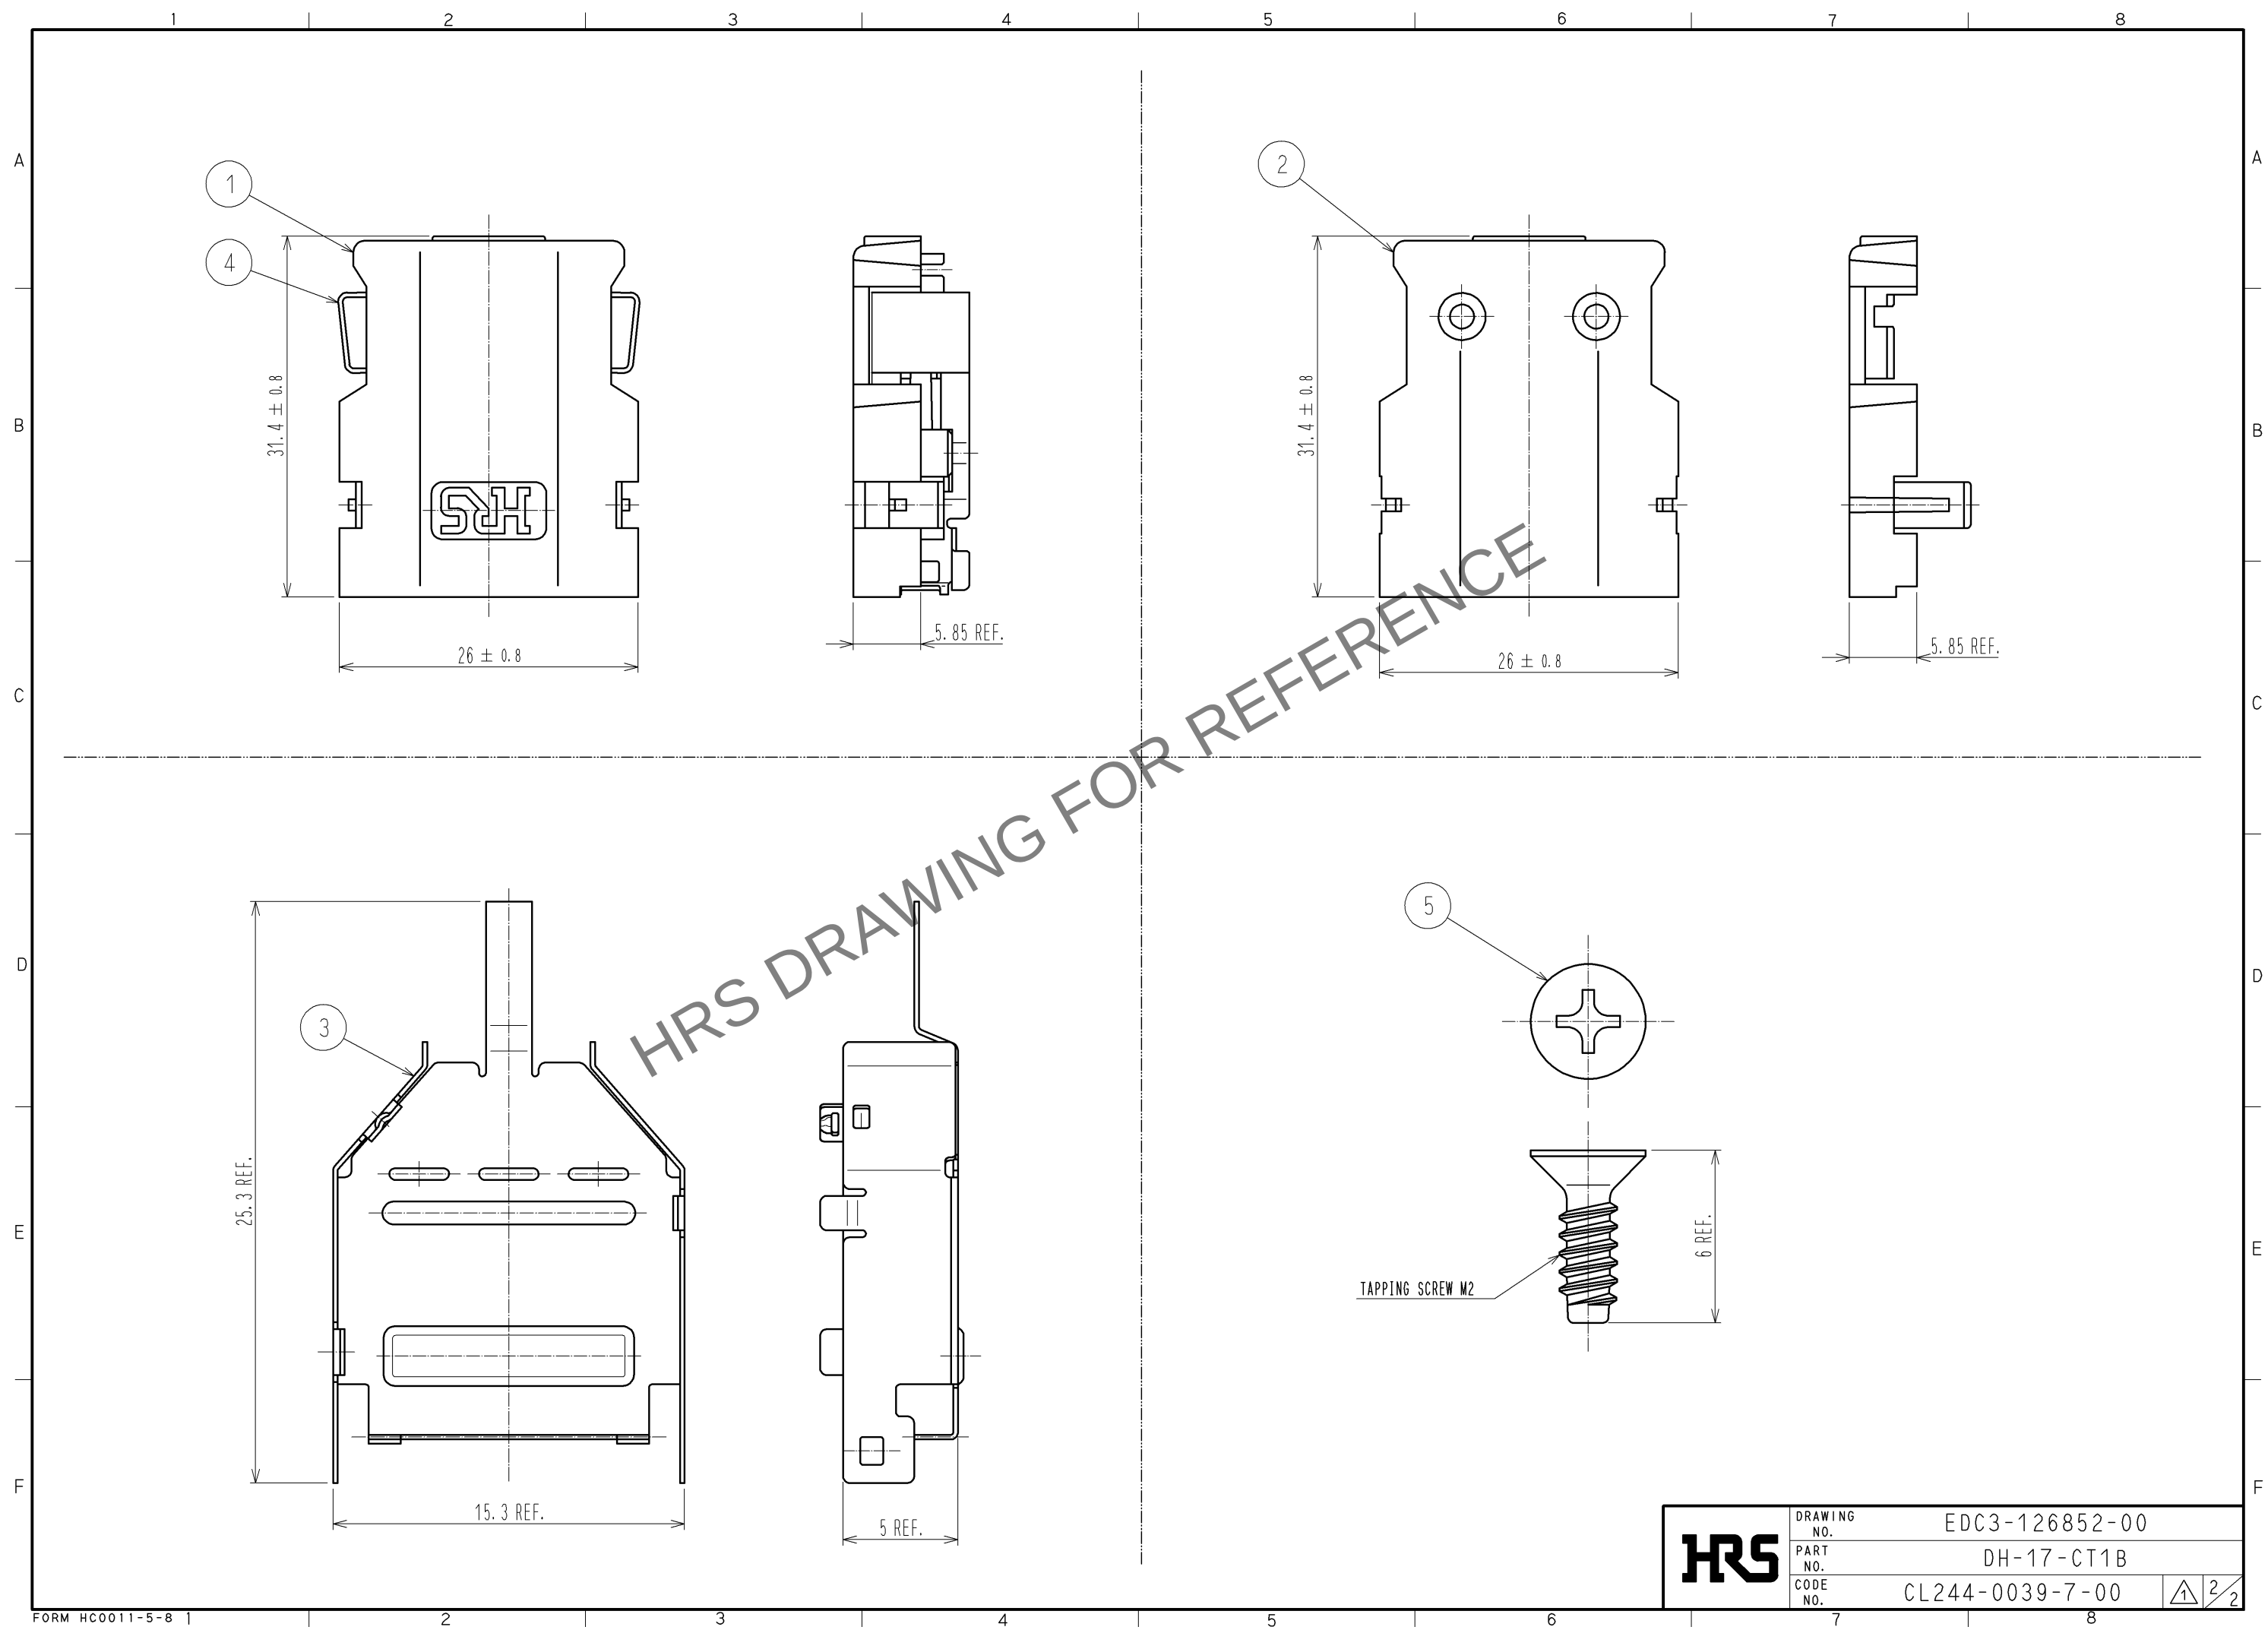

HRS	DRAWING NO.	EDC3-126852-00	2/2
	PART NO.	DH-17-CT1B	
	CODE NO.	CL244-0039-7-00	