


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

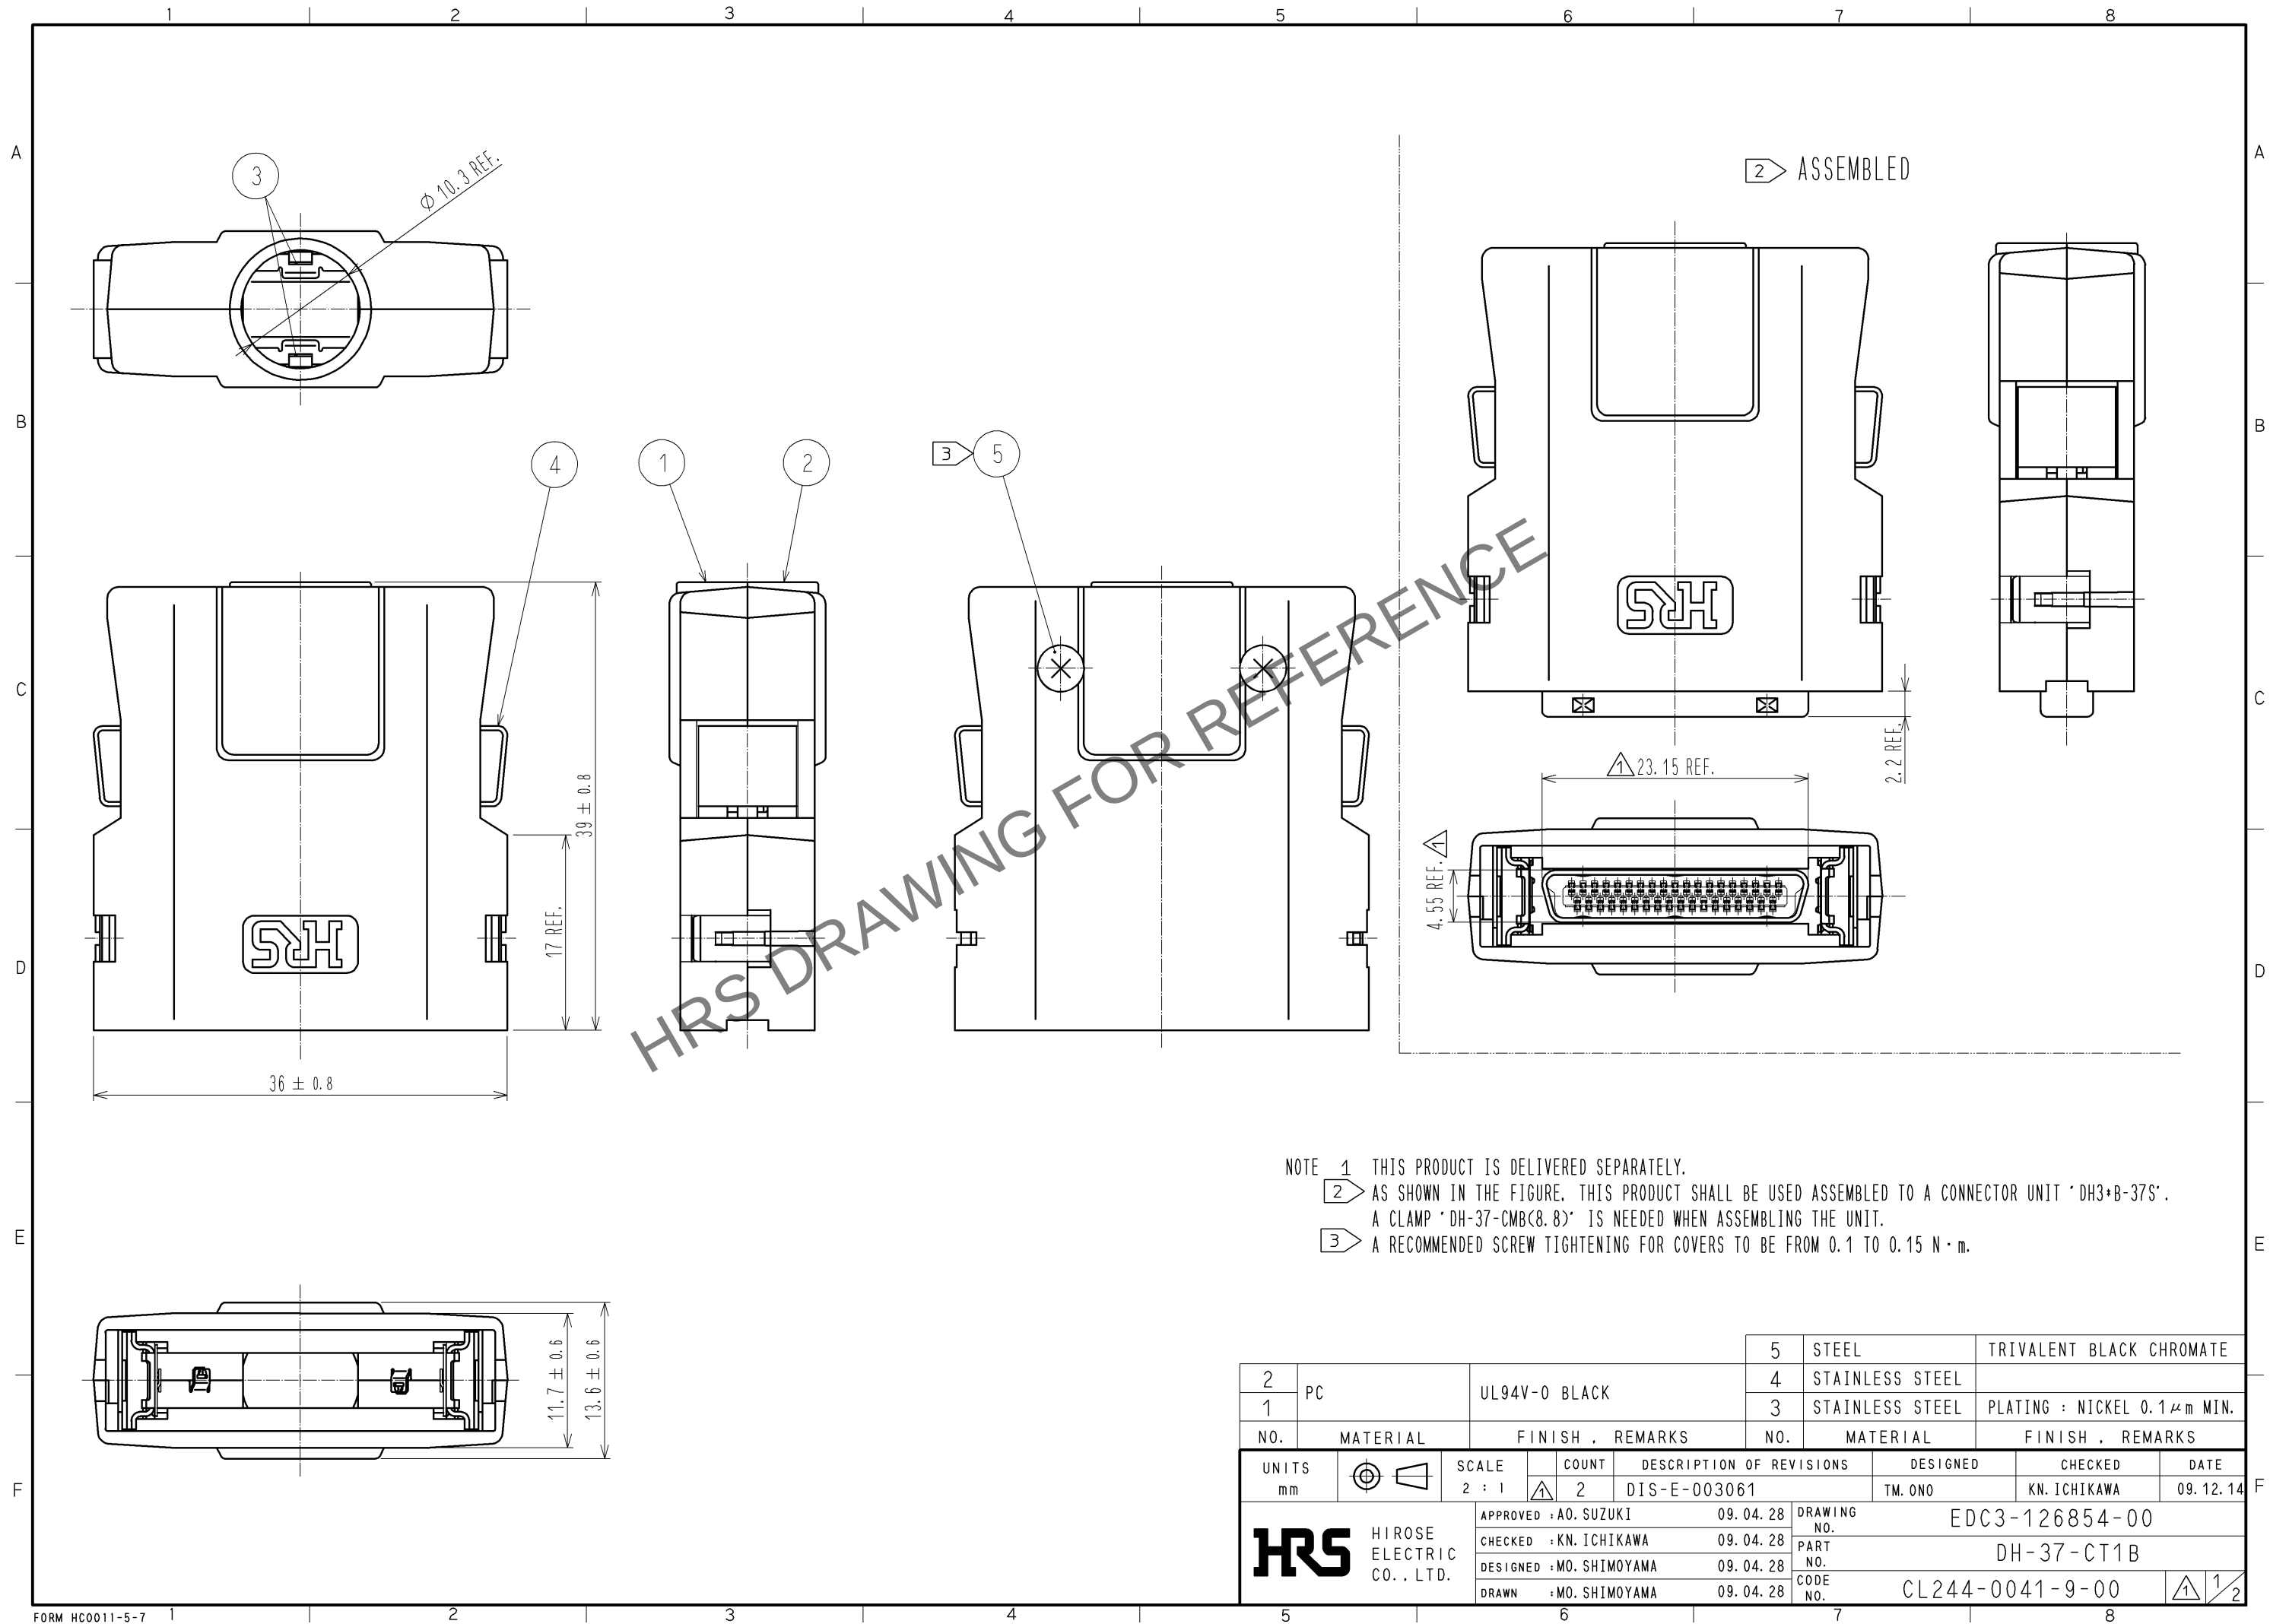

NOTE 1 THIS PRODUCT IS DELIVERED SEPARATELY.
2 AS SHOWN IN THE FIGURE, THIS PRODUCT SHALL BE USED ASSEMBLED TO A CONNECTOR UNIT 'DH3*B-37S'.
A CLAMP 'DH-37-CMB(8.8)' IS NEEDED WHEN ASSEMBLING THE UNIT.
3 A RECOMMENDED SCREW TIGHTENING FOR COVERS TO BE FROM 0.1 TO 0.15 N · m.

2		PC		UL94V-0 BLACK		5	STEEL	TRIVALENT BLACK CHROMATE
1						4	STAINLESS STEEL	
						3	STAINLESS STEEL	PLATING : NICKEL 0.1 μ m MIN.
NO.	MATERIAL		FINISH , REMARKS		NO.	MATERIAL		FINISH , REMARKS
UNITS			SCALE	COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED
mm			2 : 1	2	DIS-E-003061		TM. ONO	KN. ICHIKAWA
						DATE		09. 12. 14
						DRAWING NO.		EDC3-126854-00
						PART NO.		DH-37-CT1B
						CODE NO.		CL244-0041-9-00
								1/2

HIROSE ELECTRIC CO., LTD.

APPROVED : A0. SUZUKI

CHECKED : KN. ICHIKAWA

DESIGNED : MO. SHIMOYAMA

DRAWN : MO. SHIMOYAMA


09. 04. 28

09. 04. 28

09. 04. 28

09. 04. 28

Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

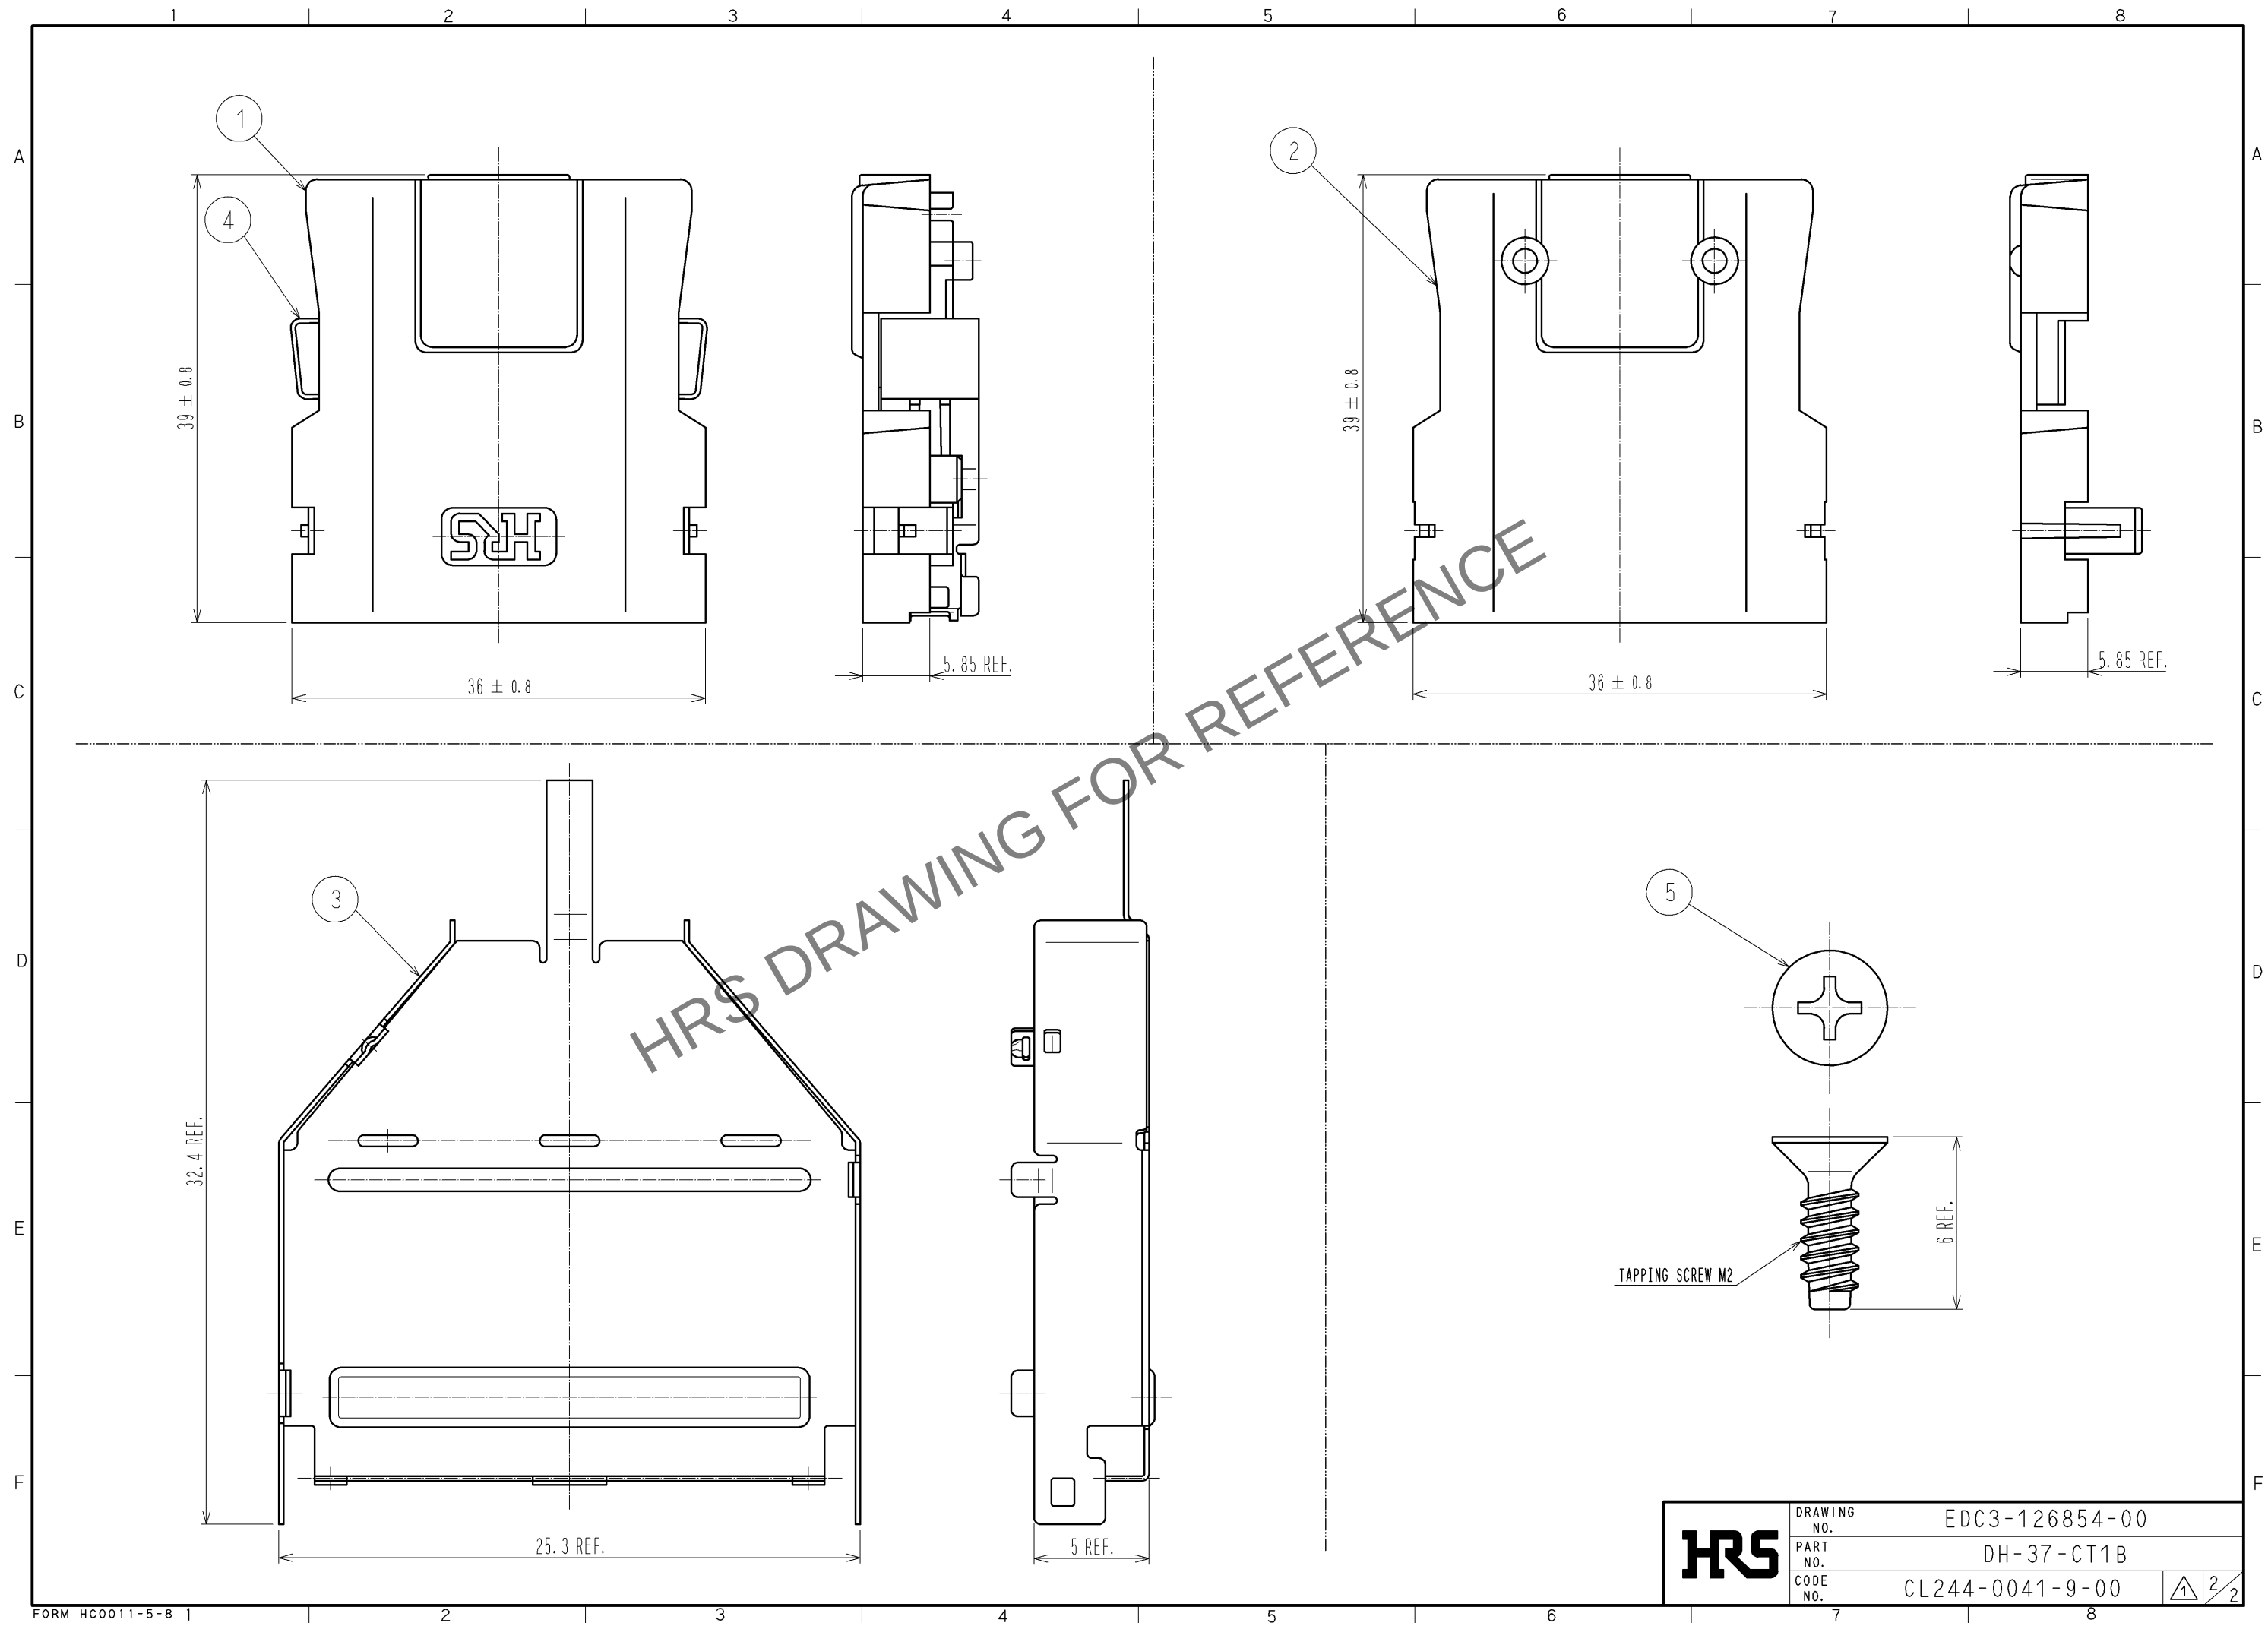

HRS	DRAWING NO.	EDC3-126854-00	2 2
	PART NO.	DH-37-CT1B	
	CODE NO.	CL244-0041-9-00	