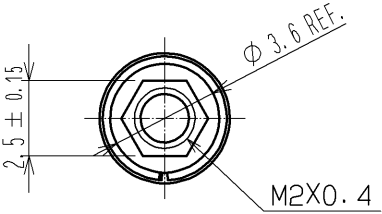
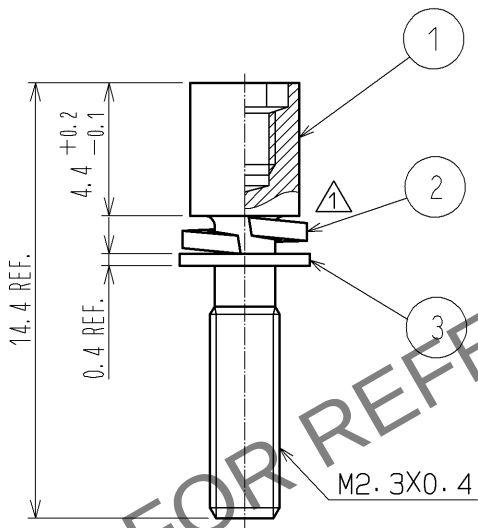
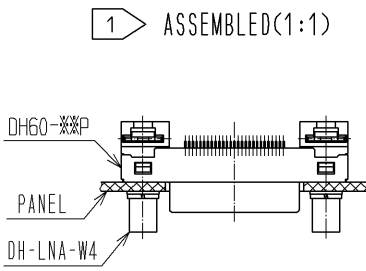


1		2		3		4	
A		B		C		D	
							
							
		NOTE 1 THIS PRODUCT IS ASSEMBLED TO A "DH60-**P". THE APPLICABLE PANEL THICKNESS IS FROM 0.9 TO 1.2mm.					
		2 THIS PRODUCT IS PACKED IN A BAG. (QUANTITY IN A BAG : 200pcs.)					
							
1 STEEL		OVER PLATING : NICKEL 5μm MIN UNDER PLATING : COPPER 1μm MIN		3 STEEL		OVER PLATING : NICKEL 5μm MIN UNDER PLATING : COPPER 1μm MIN	
NO.		FINISH , REMARKS		2 STEEL		OVER PLATING : NICKEL 5μm MIN UNDER PLATING : COPPER 1μm MIN	
UNITS mm		SCALE 4 : 1		COUNT 1		DESCRIPTION OF REVISIONS DIS-E-003059	
		HIROSE ELECTRIC CO., LTD.		APPROVED : AO. SUZUKI 09. 04. 27		DRAWING NO. EDC4-126896-00	
				CHECKED : MO. SHIMOYAMA 09. 04. 24		PART NO. DH-LNA-W4	
				DESIGNED : TS. ITO 09. 04. 24		CODE NO. CL244-0046-2-00	
				DRAWN : TS. ITO 09. 04. 24		1/1	