

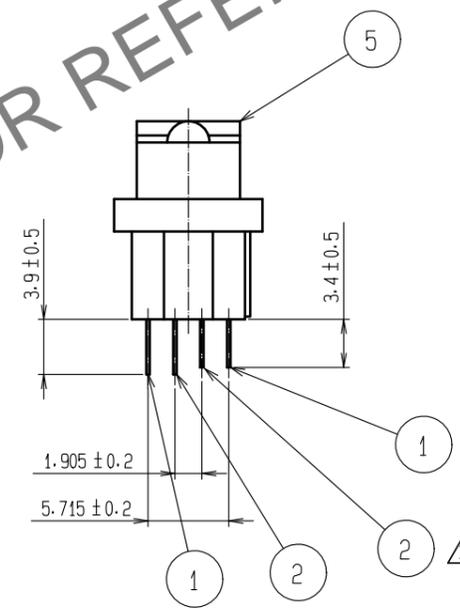
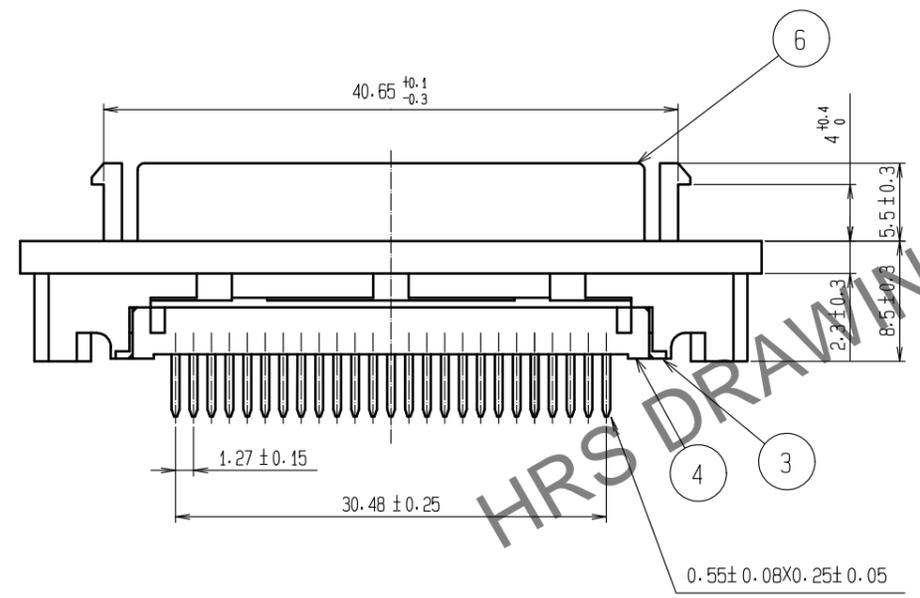
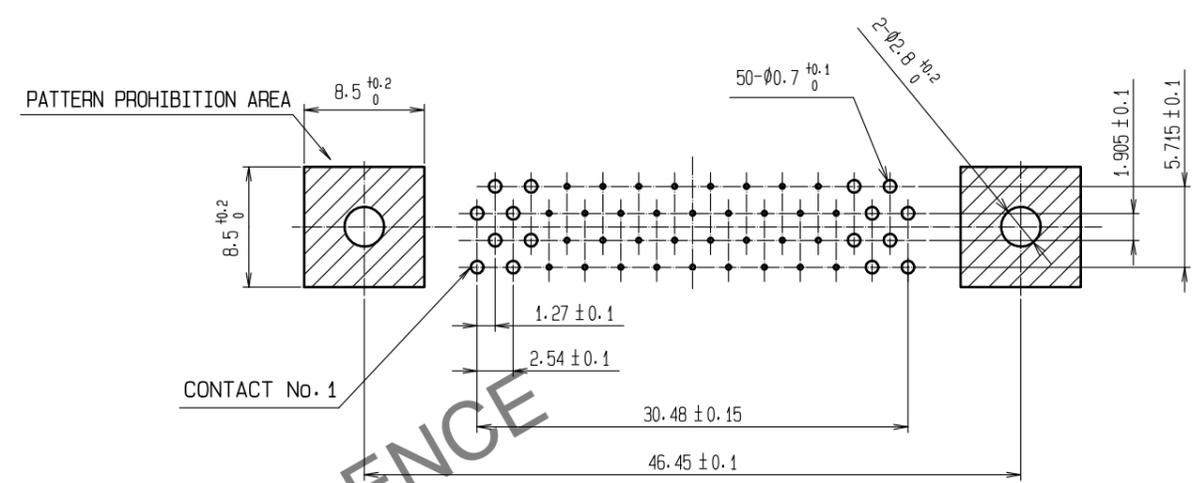


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

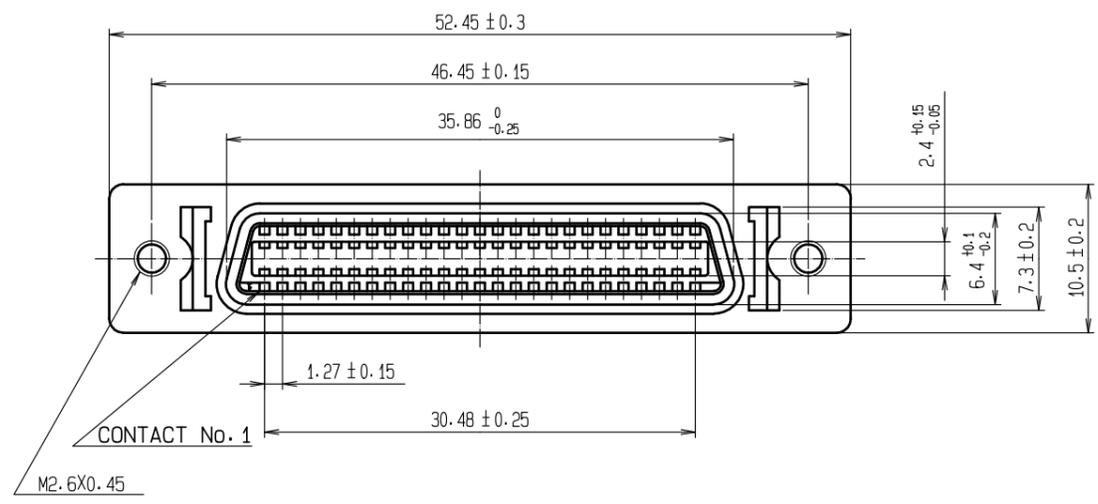


RECOMMENDED PC BOARD PATTERN

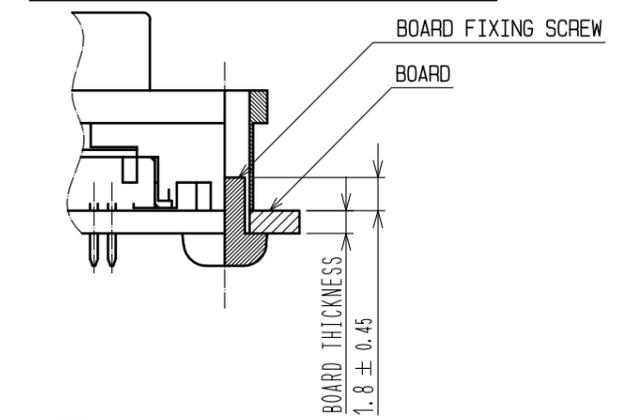

△ 1 PRODUCT - BOARD MOUNTED

△ NOTES 1 This product must be screwed to the board. Please prepare the screws by the customer.
<SCREW REQUIREMENTS>
NOMINAL DIAMETER: M2.6 x 0.45
SCREW LENGTH : 1.8 ± 0.45 + BOARD thickness 't'

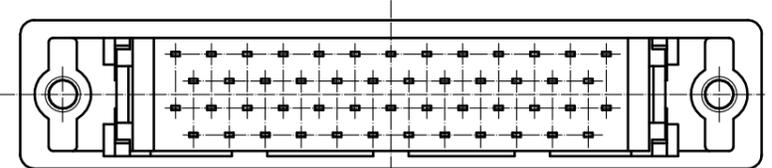

3	PBT	UL94V-0(BLACK)	6	STEEL	NICKEL PLATING
2	PHOSPHOR BRONZE	SELECTIVE GOLD PLATING 0.2μm min	5	ZINC ALLOY DIE CASTING	NICKEL PLATING
1	PHOSPHOR BRONZE	SELECTIVE GOLD PLATING 0.2μm min	4	PBT	UL94V-0(BLACK)
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS	mm	SCALE	2 : 1	COUNT	2
DESCRIPTION OF REVISIONS			DESIGNED	CHECKED	DATE
DIS-E-00010989			KG. OKITA	MN. KENJO	20220908
APPROVED : HO. MIWA		20050105	DRAWING NO. EDC3-028511-01		
CHECKED : YH. ENAMI		20050105	PART NO. DX20-50S(50)		
DESIGNED : TU. TANIGUCHI		20050105	CODE NO. CL0230-0068-2-50		
DRAWN : TU. TANIGUCHI		20050105	1/1		