


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

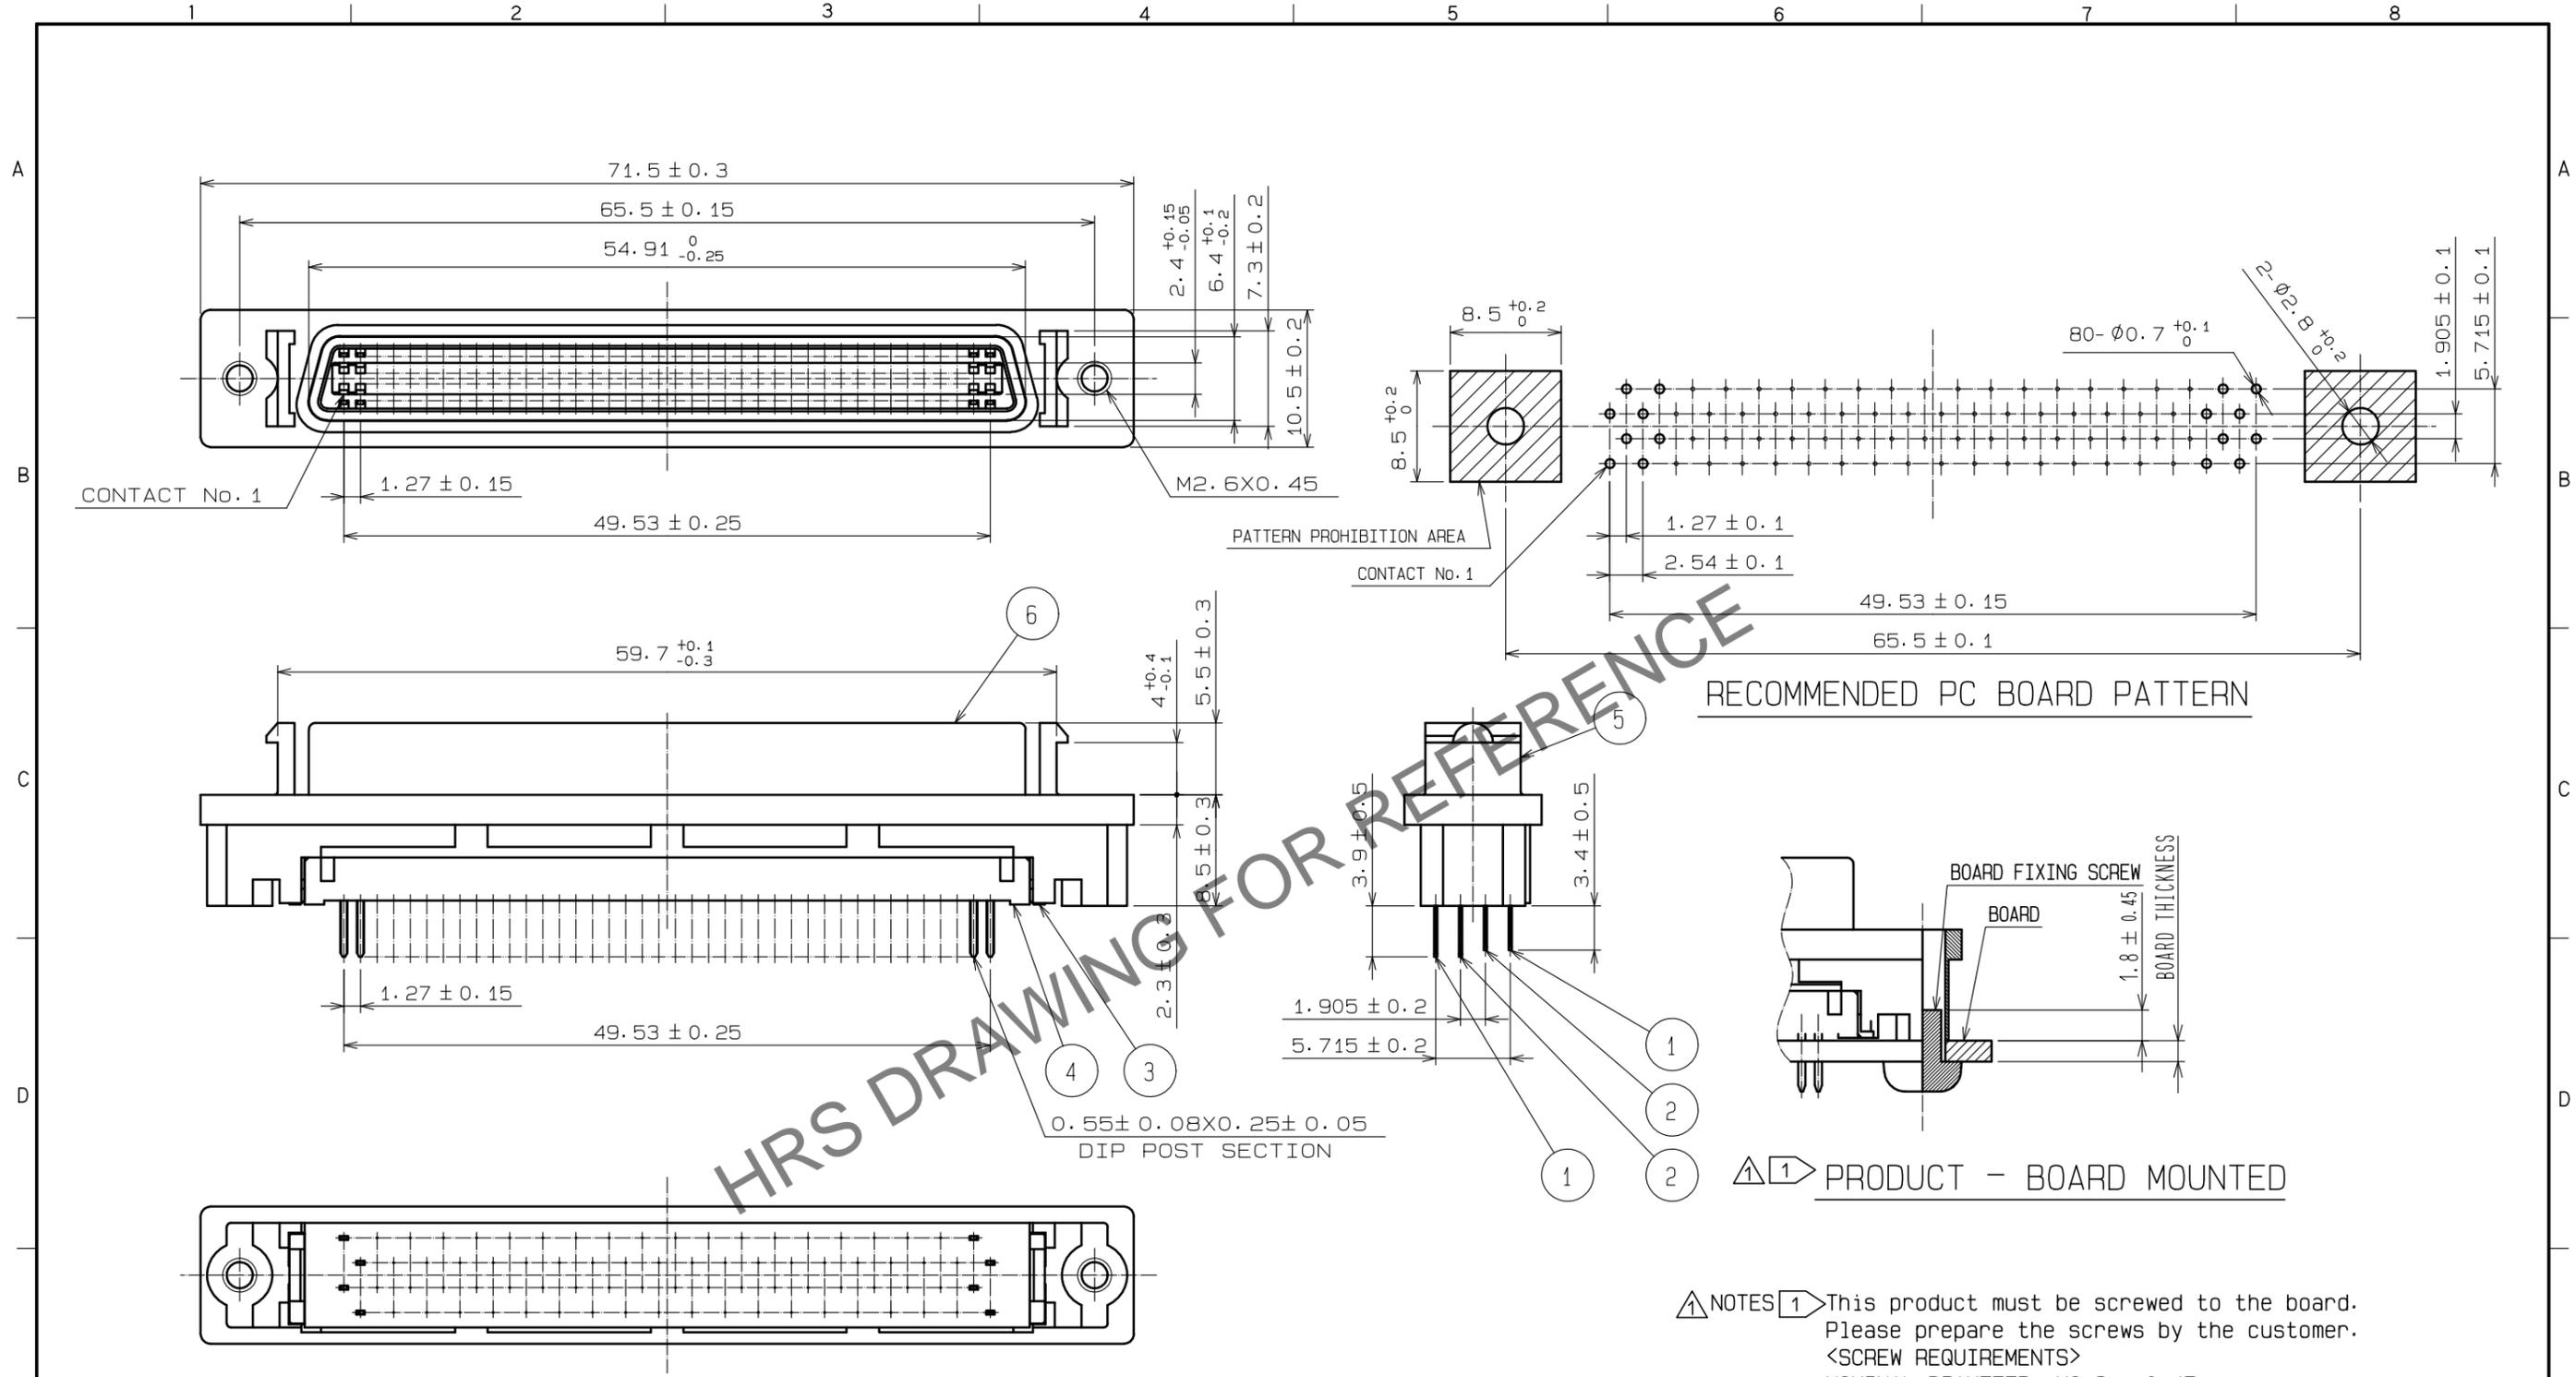

△ NOTES 1 This product must be screwed to the board.
 Please prepare the screws by the customer.
 <SCREW REQUIREMENTS>
 NOMINAL DIAMETER: M2.6 x 0.45
 SCREW LENGTH : 1.8 ± 0.45 + BOARD thickness 't'

3	PBT	BLACK UL94V-0	6	STEEL	NICKEL PLATING
2	PHOSPHOR BRONZE	SELECTIVE GOLD PLATING 0.2µm min	5	ZINC ALLOY DIE CASTING	NICKEL PLATING
1	PHOSPHOR BRONZE	SELECTIVE GOLD PLATING 0.2µm min	4	PBT	BLACK UL94V-0
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
UNITS	mm	SCALE	2 : 1	COUNT	2
DESCRIPTION OF REVISIONS			DESIGNED	CHECKED	DATE
DIS-E-00010989			KG. OKITA	MN. KENJO	20220908
APPROVED : HO. MIWA 20050105			DRAWING NO. EDC3-041640-01		
CHECKED : YH. ENAMI 20050105			PART NO. DX20-80S(50)		
DESIGNED : TU. TANIGUCHI 20050105			CODE NO. CL0230-0083-6-50		
DRAWN : TU. TANIGUCHI 20050105			1/1		