




Oct.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

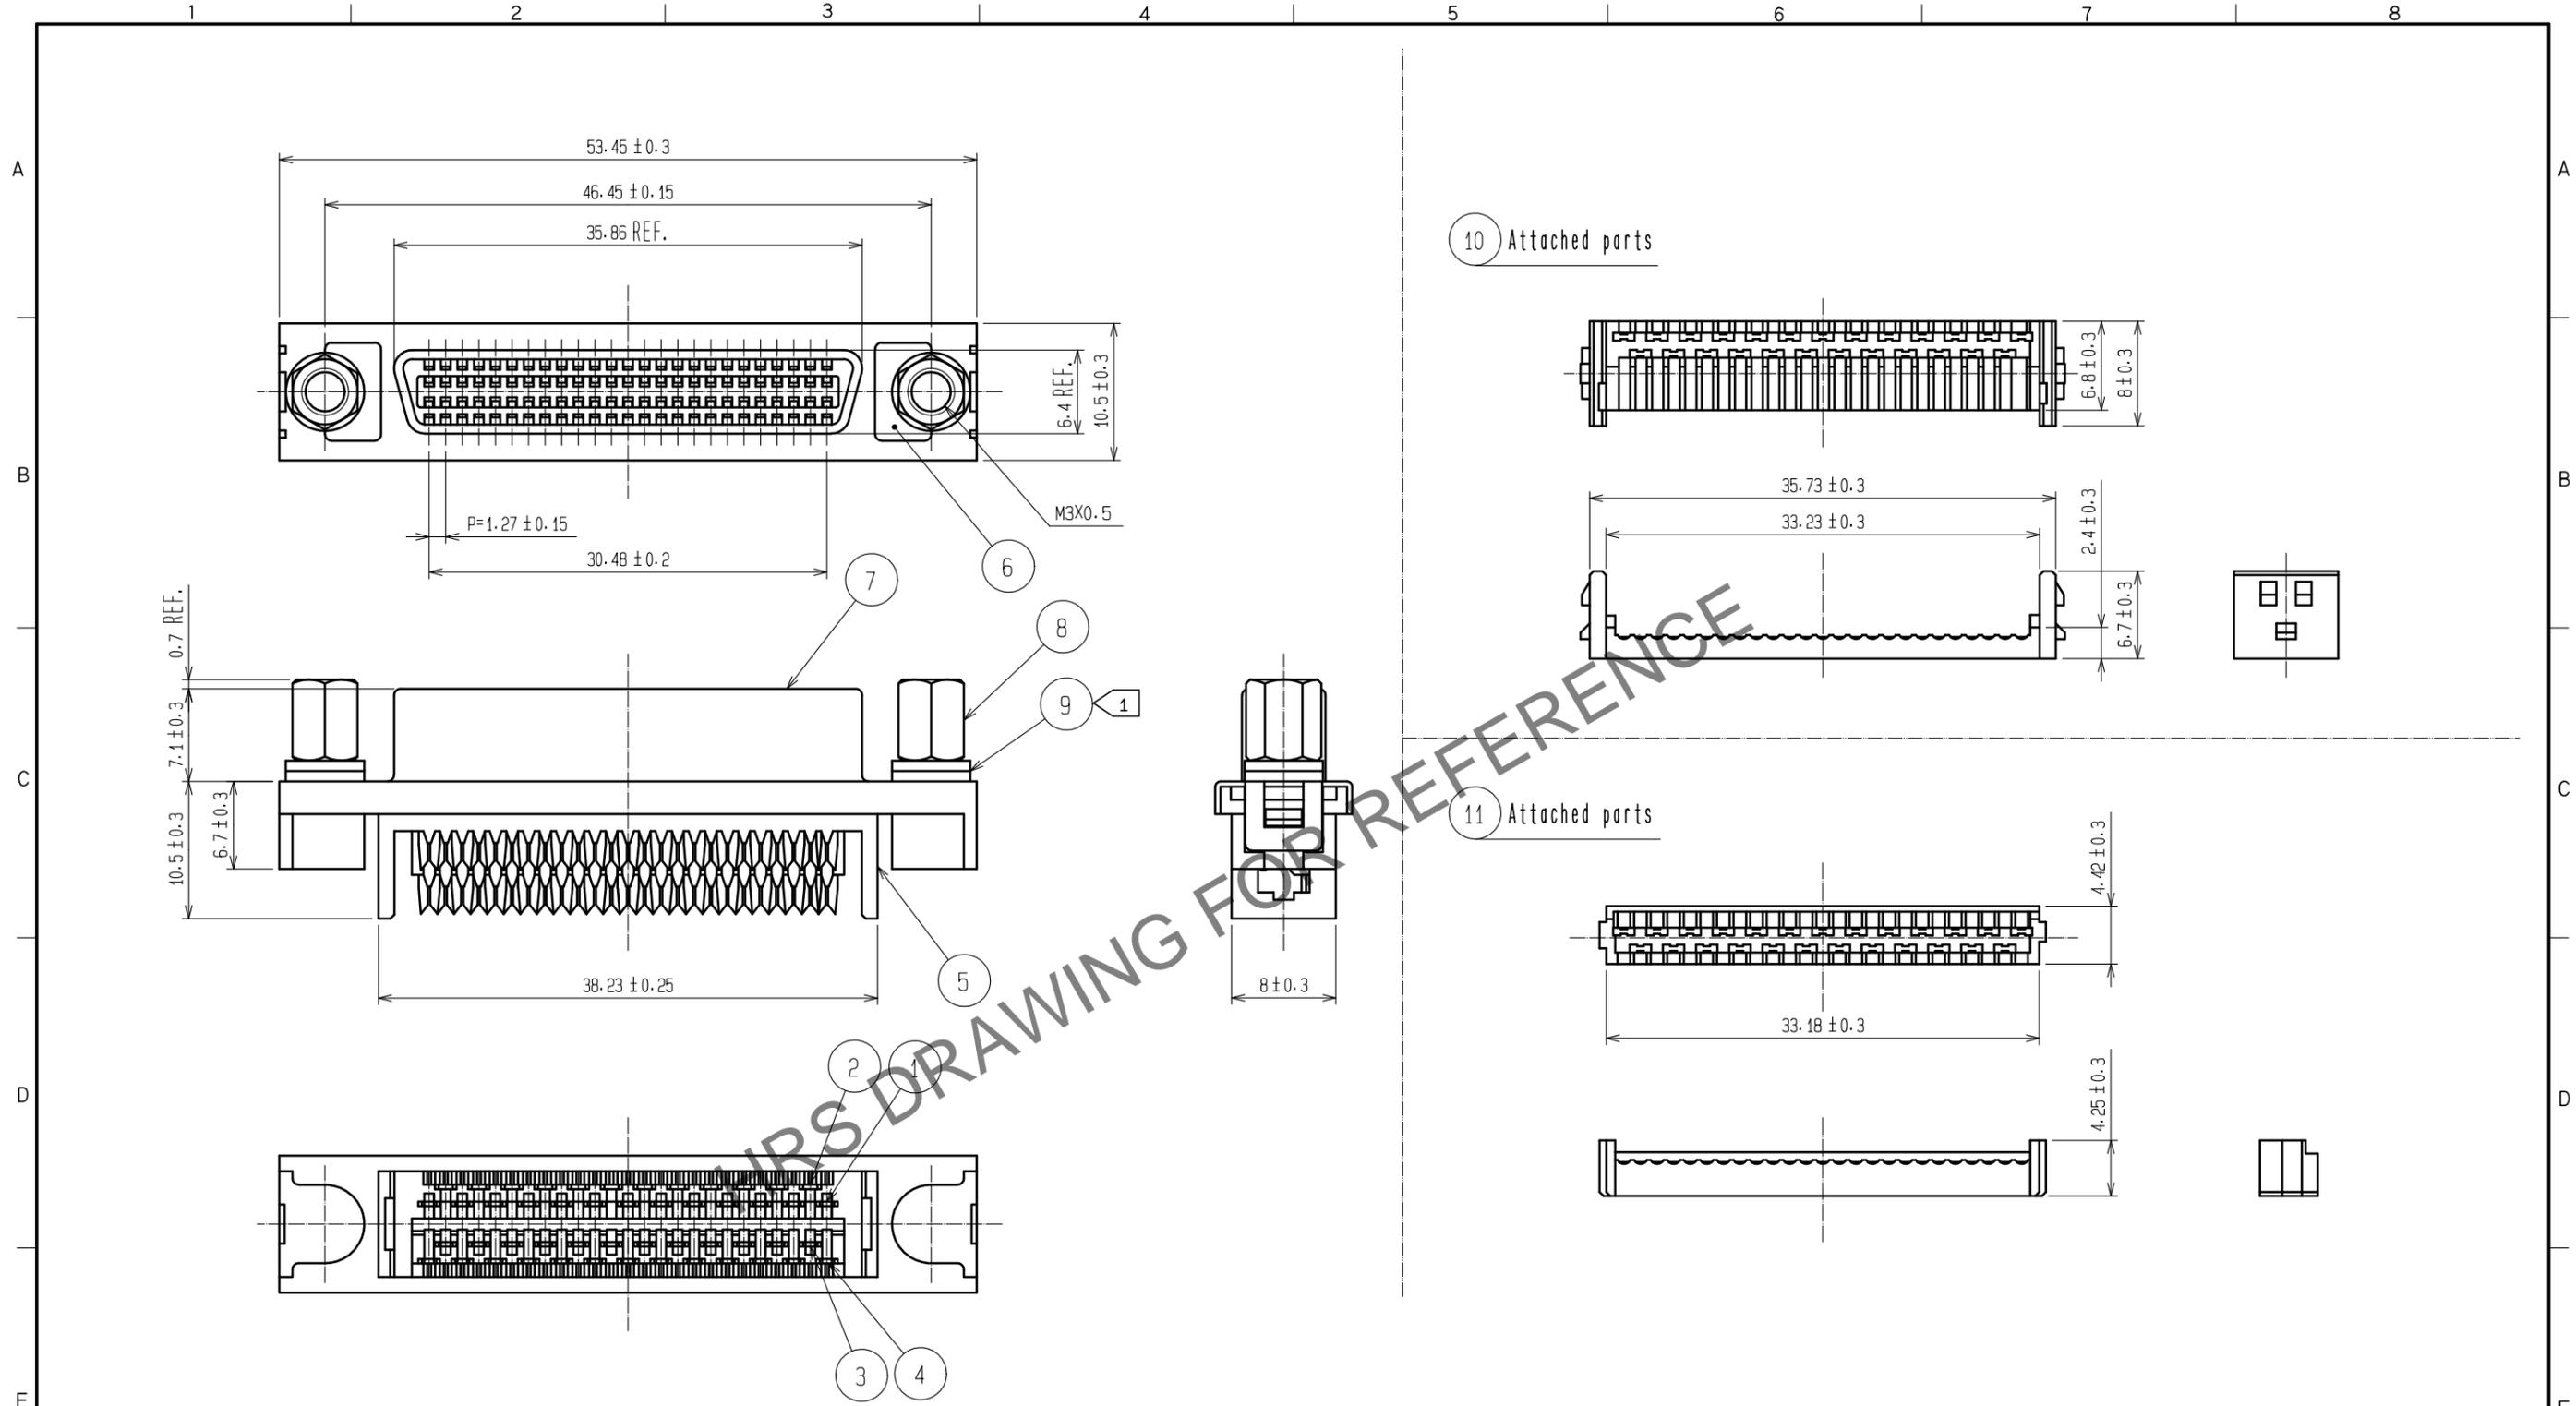


10 Attached parts

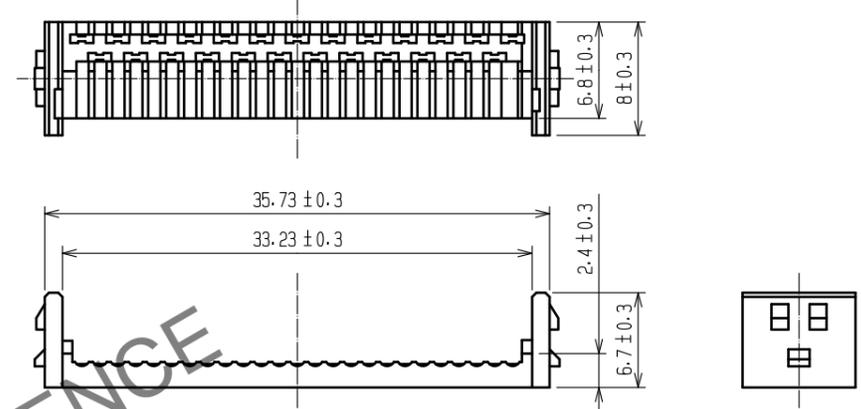

11 Attached parts

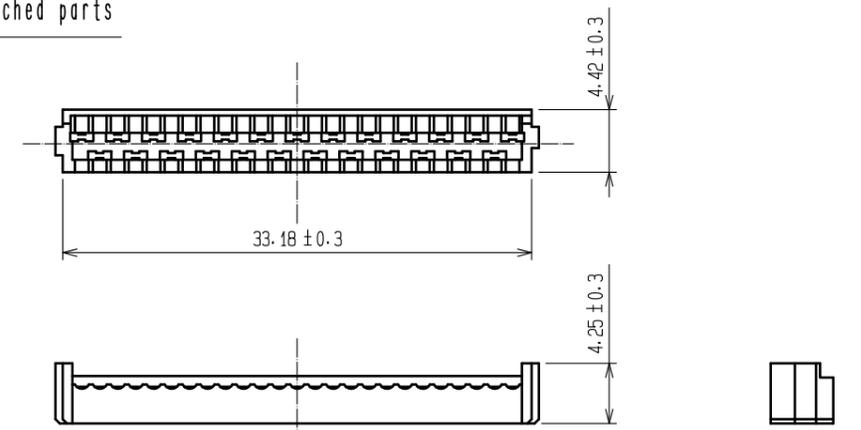

Recommended panel cutout

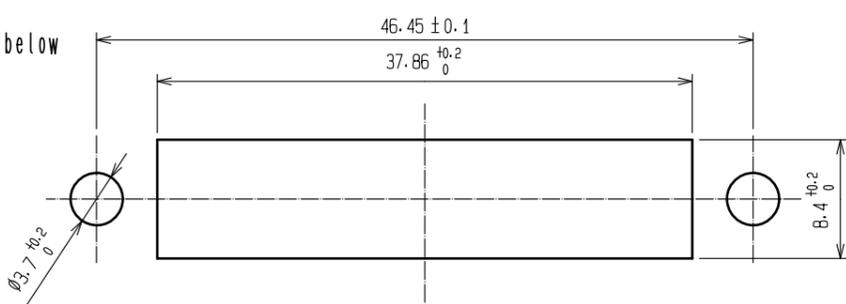

Note 1 Part No. 9 shall be finished as tabl shown below according to panel thickness.
 (Washer thickness : 0.8)

Panel thickness	No. of washer
t = 0.7 to 1.0	2 each
t = 1.5 to 1.8	1 each

NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS
6	Zinc Alloy Die Casting	Nickel plating		11	PBT	UL94V-0(Black)	
5	PBT	UL94V-0(Milky-white)		10	PBT	UL94V-0(Black)	
4	Phosphor Bronze	Selective Gold plating 0.2 μm		9	Steel	Nickel plating	
3	Phosphor Bronze	Selective Gold plating 0.2 μm		8	Steel	Nickel plating	
2	Phosphor Bronze	Selective Gold plating 0.2 μm		7	Steel	Nickel plating	
1	Phosphor Bronze	Selective Gold Plating 0.2 μm					

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	△				
APPROVED : KI. NAGANUMA			18.06.27	DRAWING NO. EDC-044934-55-03		
CHECKED : KI. NAGANUMA			18.06.27	PART NO. DX33A-50S-LNA(55)		
DESIGNED : YS. SAKODA			18.06.26	CODE NO. CL230-0206-4-55		
DRAWN : YS. SAKODA			18.06.26	1/1		