


Dec.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

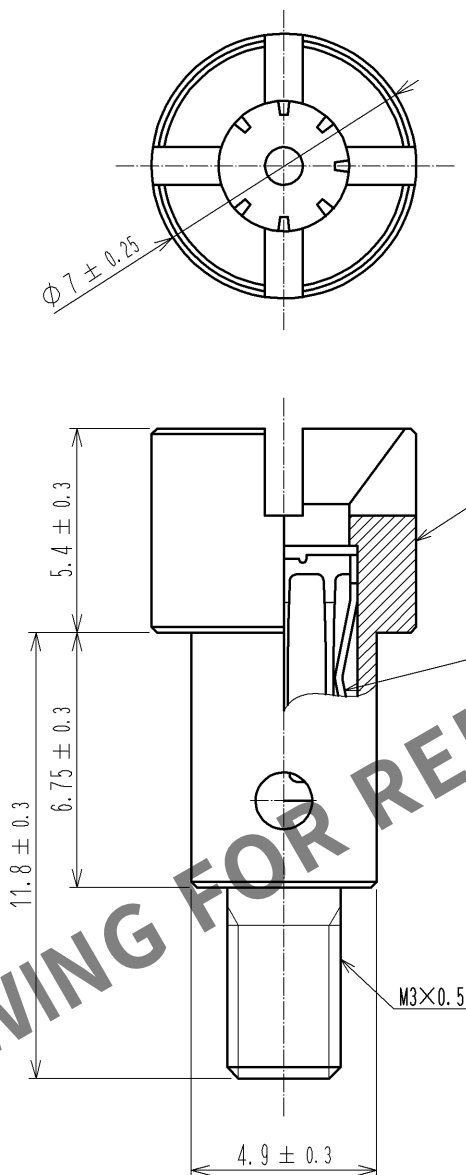

- NOTE 1. 1 PAKING : 2 PCS.
2. THE RECOMMENDED TIGHTENING TORQUE TO BE 0.63 N · m.

1	BRASS	UNDER PLATING: COPPER 1 μm MIN. OVER PLATING: NICKEL 2 μm MIN.	2	STAINLESS STEEL	NICKEL 1 μm MIN.		
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS		
UNITS mm		SCALE 5 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : RI. TAKAYASU	12. 08. 23	DRAWING NO.	EDC4-127152-00		
		CHECKED : EJ. WAKATSUKI	12. 08. 23	PART NO.	EX-SG		
		DESIGNED : MO. SHIMOYAMA	12. 08. 23	CODE NO.	CL232-0630-0-00		
		DRAWN : MO. SHIMOYAMA	12. 08. 23				1 1