

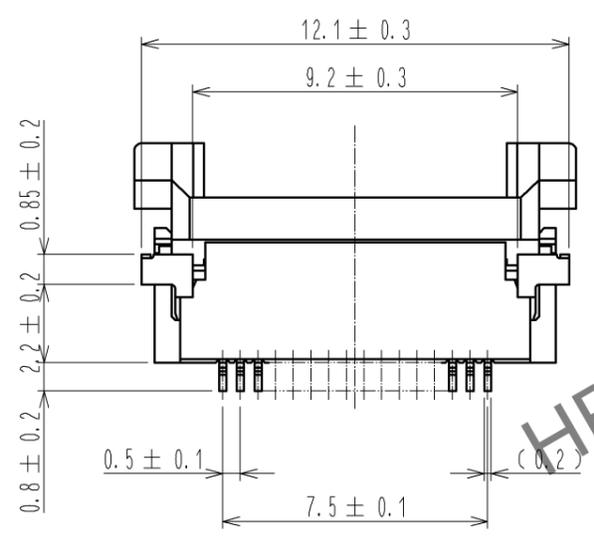
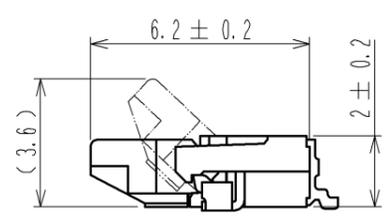




Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

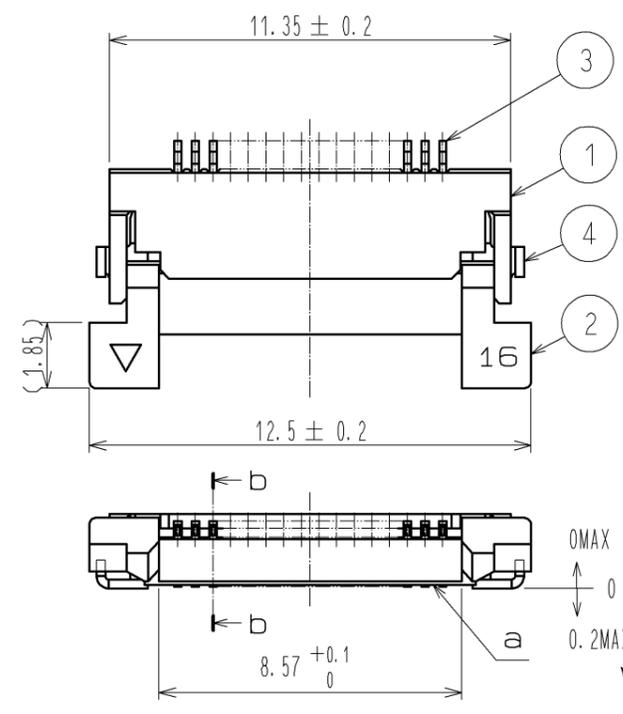

b-b (10 : 1)

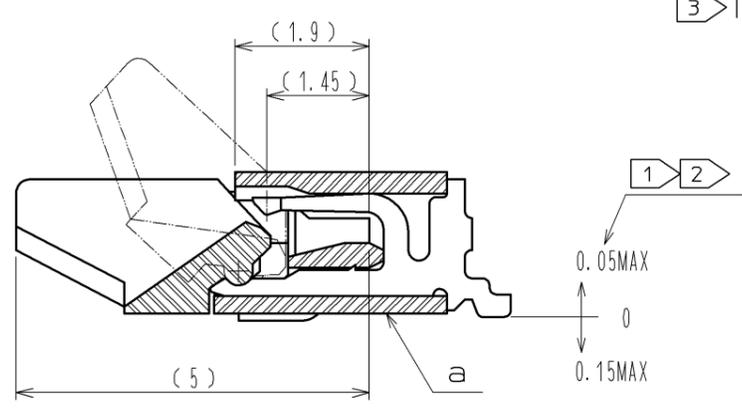

NOTE
 ① REFERENCE IS a.
 ② LEAD CO-PLANARITY SHALL BE 0.1 MAX.
 ③ THICKNESS OF SUPPORTING TAPE SHALL BE 0.188(7.5mil) MIN.

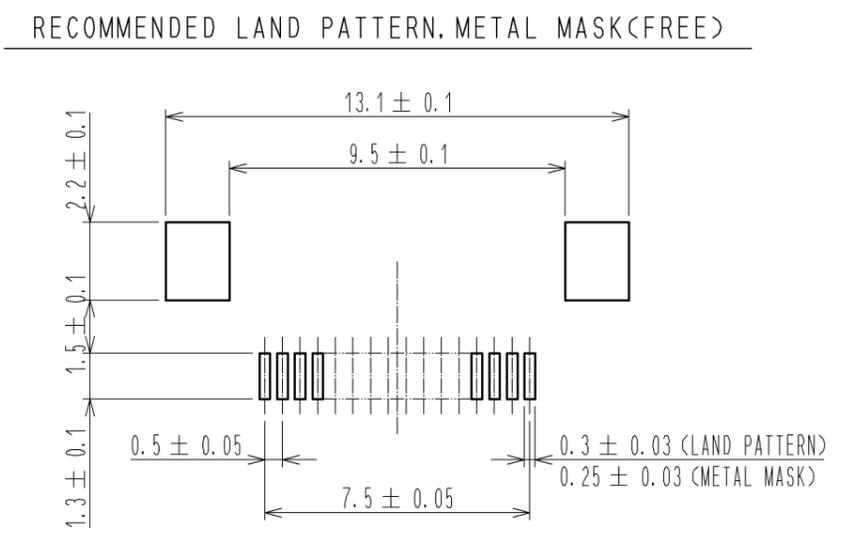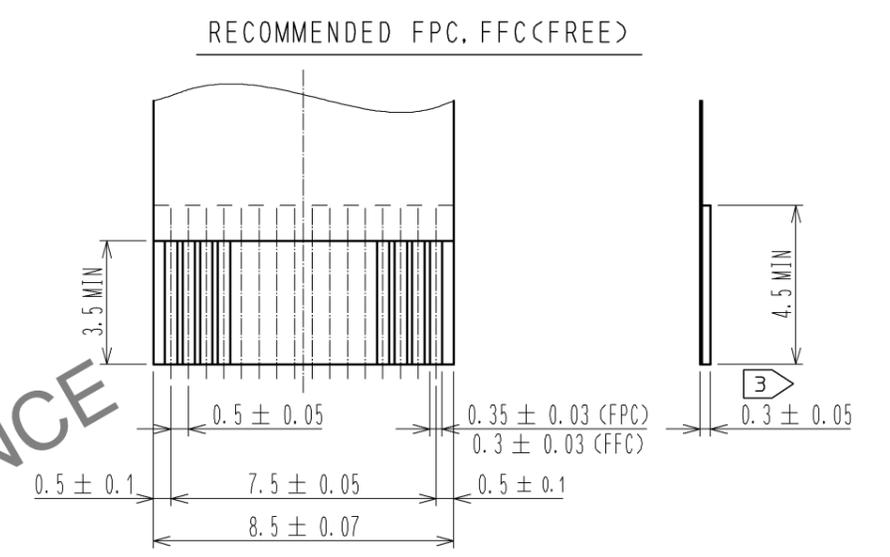

RECOMMENDED METAL MASK THICKNESS t=0.15





4	BRASS	TIN PLATING 1μmMIN OVER NICKEL 1μmMIN.	8	(CONNECTOR)			
3	PHOSPHOR BRONZE	GOLD PLATING 0.05μmMIN OVER NICKEL 1μmMIN.	7	POLYSTYRENE			
2	PPS	DEEP BROWN	UL94V-0	6	POLYESTER		
1	POLYAMIDE	BEIGE	UL94V-0	5	POLYSTYRENE		
NO.	MATERIAL	FINISH .	REMARKS	NO.	MATERIAL	FINISH .	REMARKS
UNITS	mm	SCALE	5 : 1	COUNT	1	DESCRIPTION OF REVISIONS	DIS-F-003410
		DESIGNED	MK. YASUMI	CHECKED	FN. TAMURA	DATE	09.12.11
APPROVED : RI. TAKAYASU		08.09.02	DRAWING NO.		EDC3-150552-51		
CHECKED : HS. SAKAMOTO		08.09.01	PART NO.		FH12A-16S-0.5SH(55)		
DESIGNED : MK. YASUMI		08.08.26	CODE NO.		CL586-0552-4-55		
DRAWN : MK. YASUMI		08.08.26					

HRS DRAWING FOR REFERENCE


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

EMBOSSED CARRIER TAPE DIMENSION(2:1)


REEL DIMENSION(FREE)

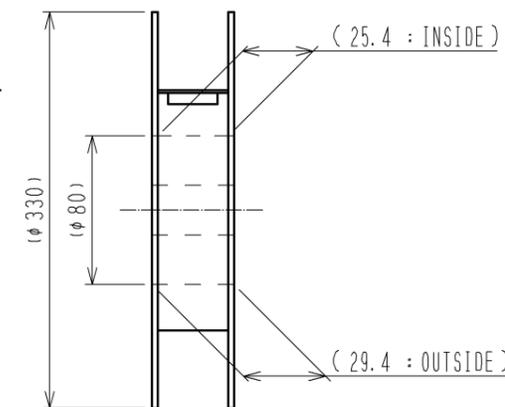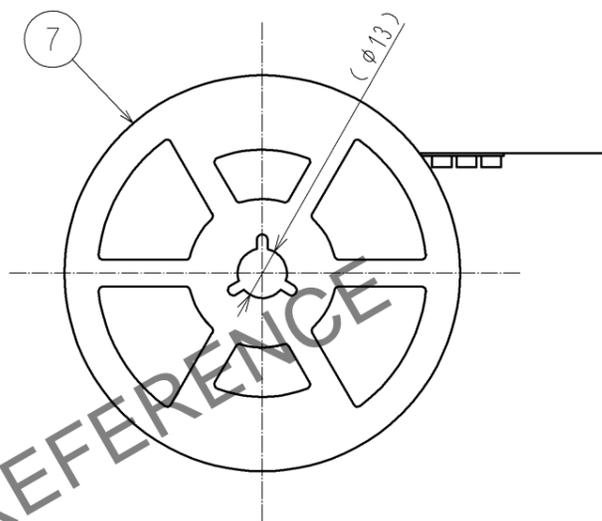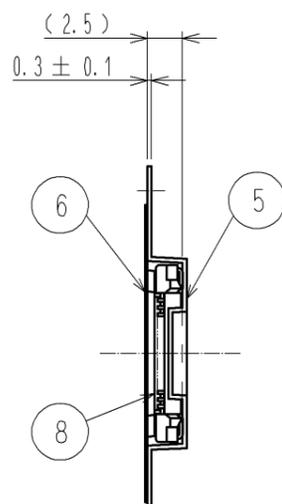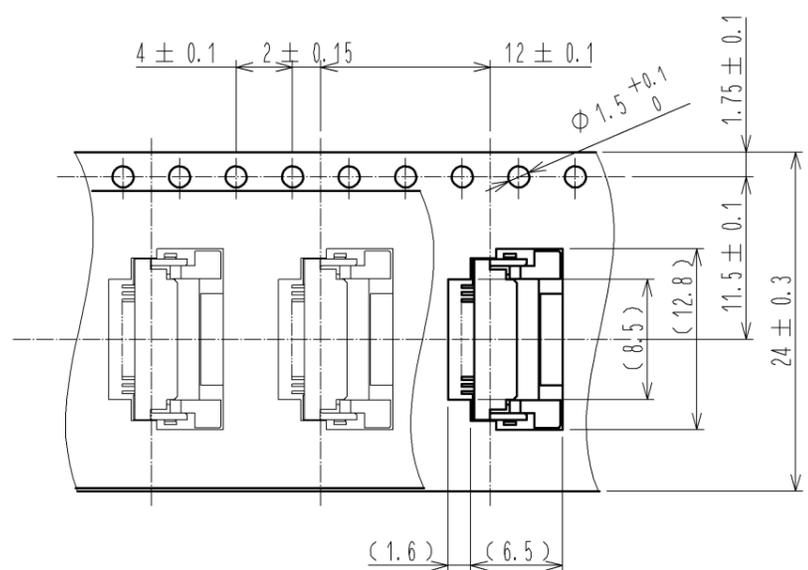

→
DIRECTION OF UNREELING



HRS DRAWING FOR REFERENCE

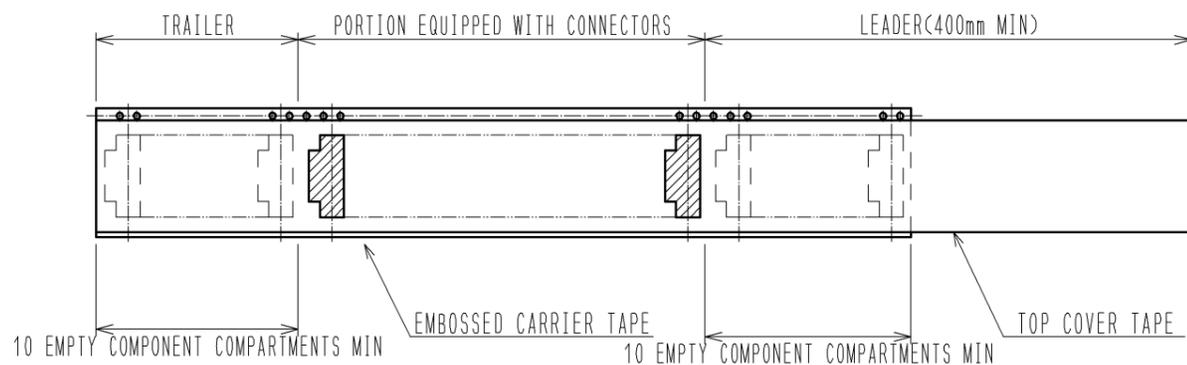

NOTE 4 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
 5 1 REEL:2000 CONNECTORS.

<DRAWING FOR PACKING>

HRS	DRAWING NO.	EDC3-150552-51
	PART NO.	FH12A-16S-0.5SH(55)
	CODE NO.	CL586-0552-4-55
		2/2