




A
—
B
—
C
—
D
—
E
—
F

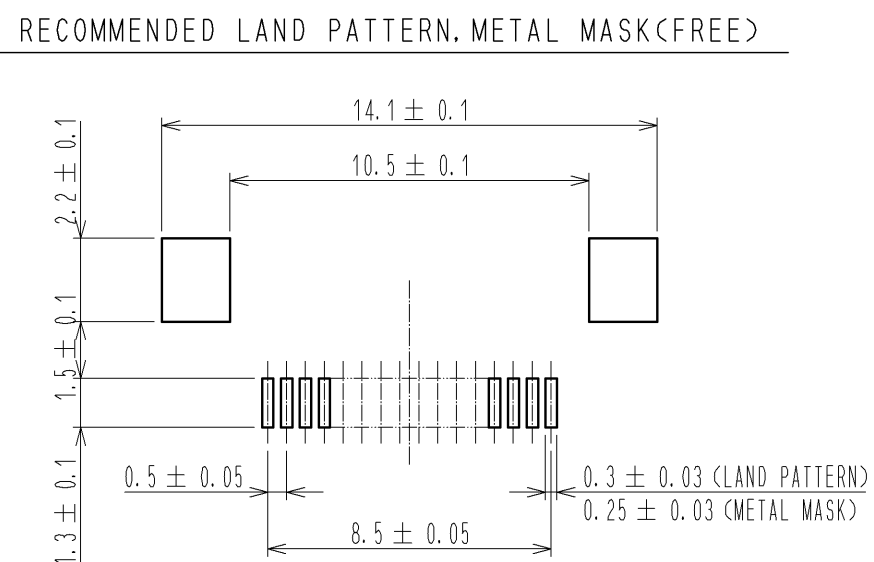


NOTE ① ① REFERENCE IS a.
② LEAD CO-PLANARITY SHALL BE 0.1 MAX.
③ THICKNESS OF SUPPORTING TAPE SHALL BE 0.188(7.5mil) MIN.

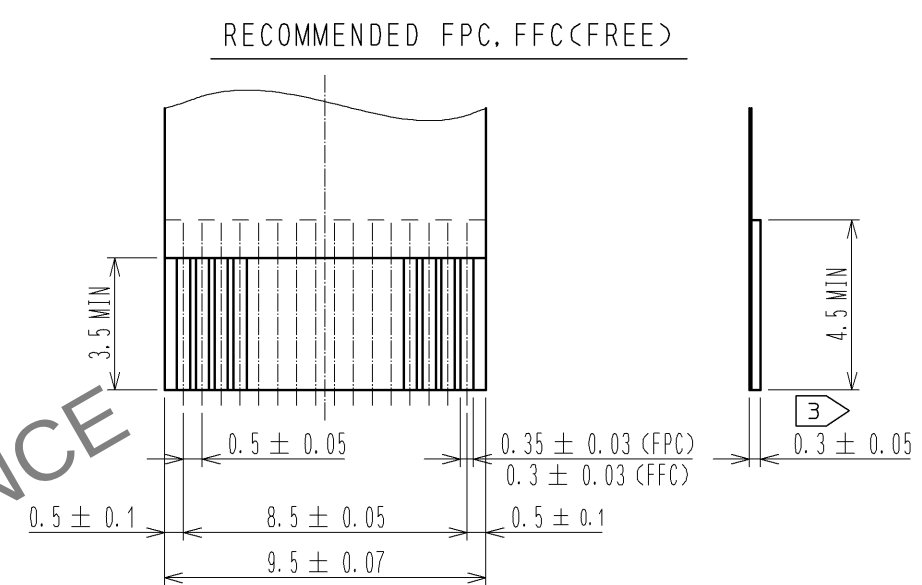

4	BRASS	TIN PLATING 1μMIN OVER NICKEL 1μMIN.	8	(CONNECTOR)	
3	PHOSPHOR BRONZE	GOLD PLATING 0.05μMIN OVER NICKEL 1μMIN.	7	POLYSTYRENE	
2	PPS	DEEP BROWN UL94V-0	6	POLYESTER	
1	POLYAMIDE	BEIGE UL94V-0	5	POLYSTYRENE	
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS

UNITS mm		SCALE 5 : 1		COUNT 1	DESCRIPTION OF REVISIONS DIS-F-003410	DESIGNED MK. YASUMI	CHECKED FN. TAMURA	DATE 09. 12. 11
 HIROSE ELECTRIC CO., LTD.		APPROVED : RI. TAKAYASU		08. 09. 02	DRAWING NO. EDC3-150553-51			
		CHECED : HS. SAKAMOTO		08. 09. 01	PART NO. FH12A-18S-0. 5SH<55>			
		DESIGNED : MK. YASUMI		08. 08. 26	CODE NO. CL586-0553-7-55			
		DRAWN : MK. YASUMI		08. 08. 26	 1/2			

Oct.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

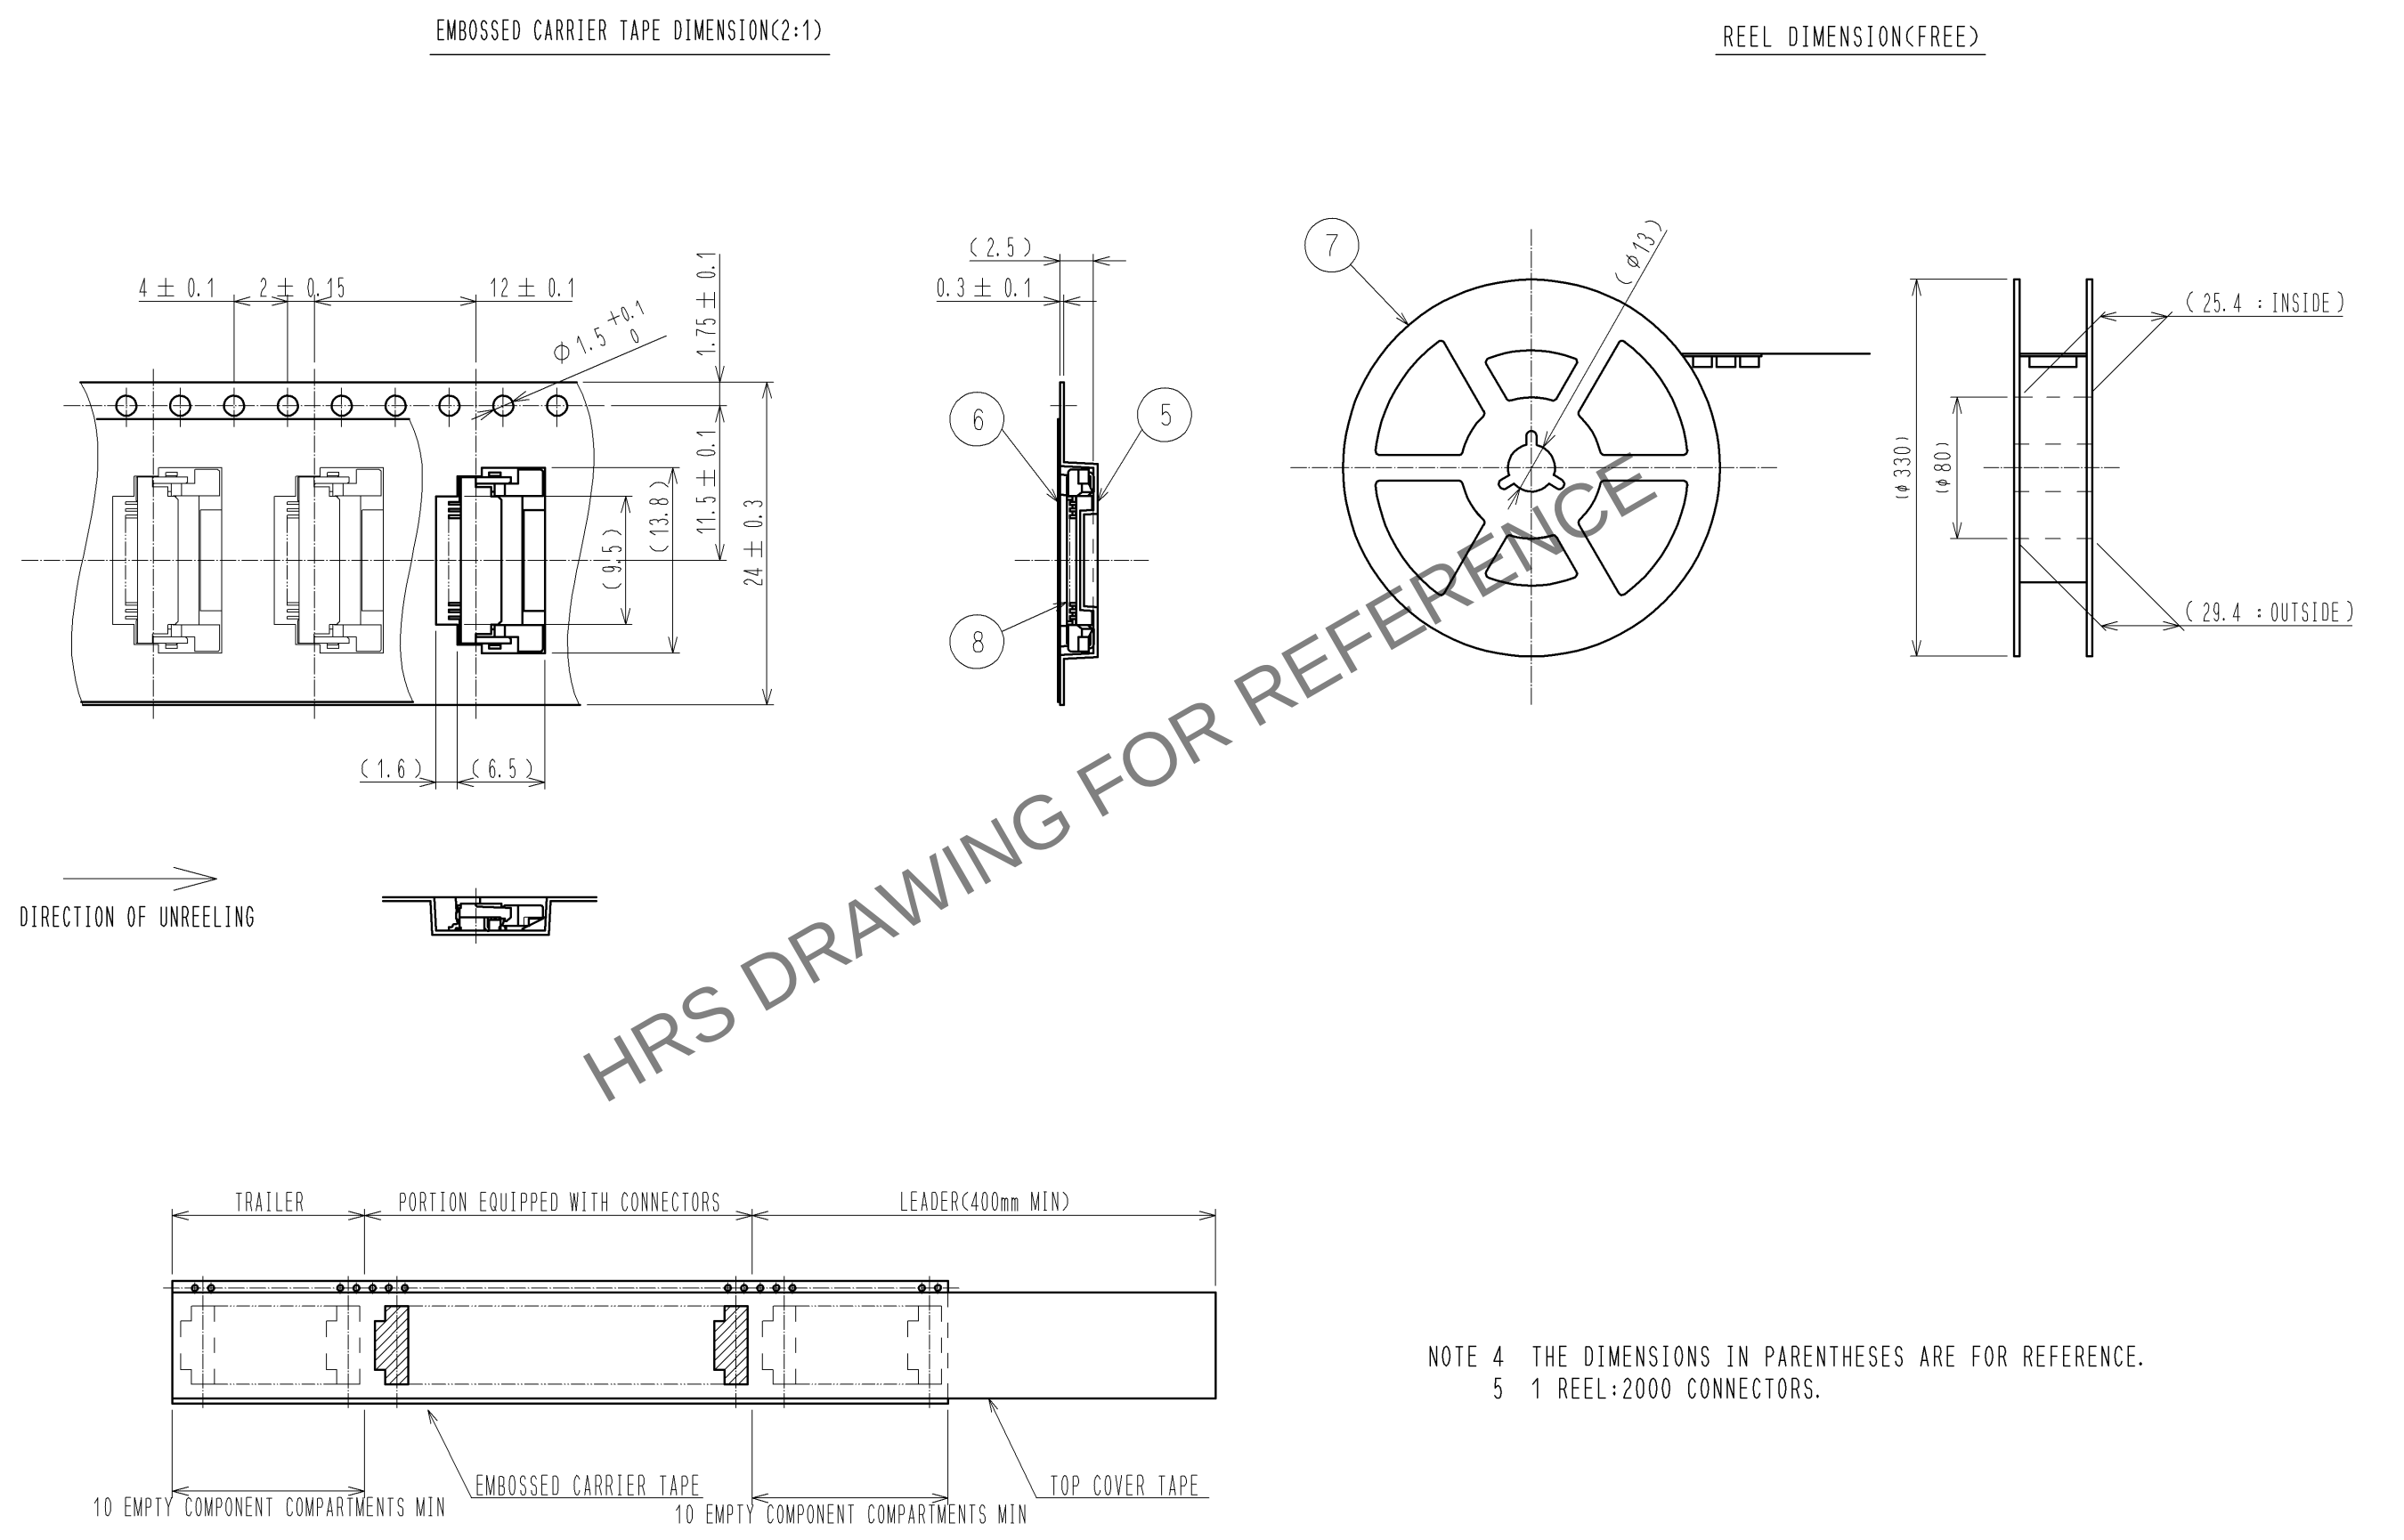

<DRAWING FOR PACKING>

HRS	DRAWING NO.	EDC3-150553-51
	PART NO.	FH12A-18S-0.5SH(55)
	CODE NO.	CL586-0553-7-55