


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

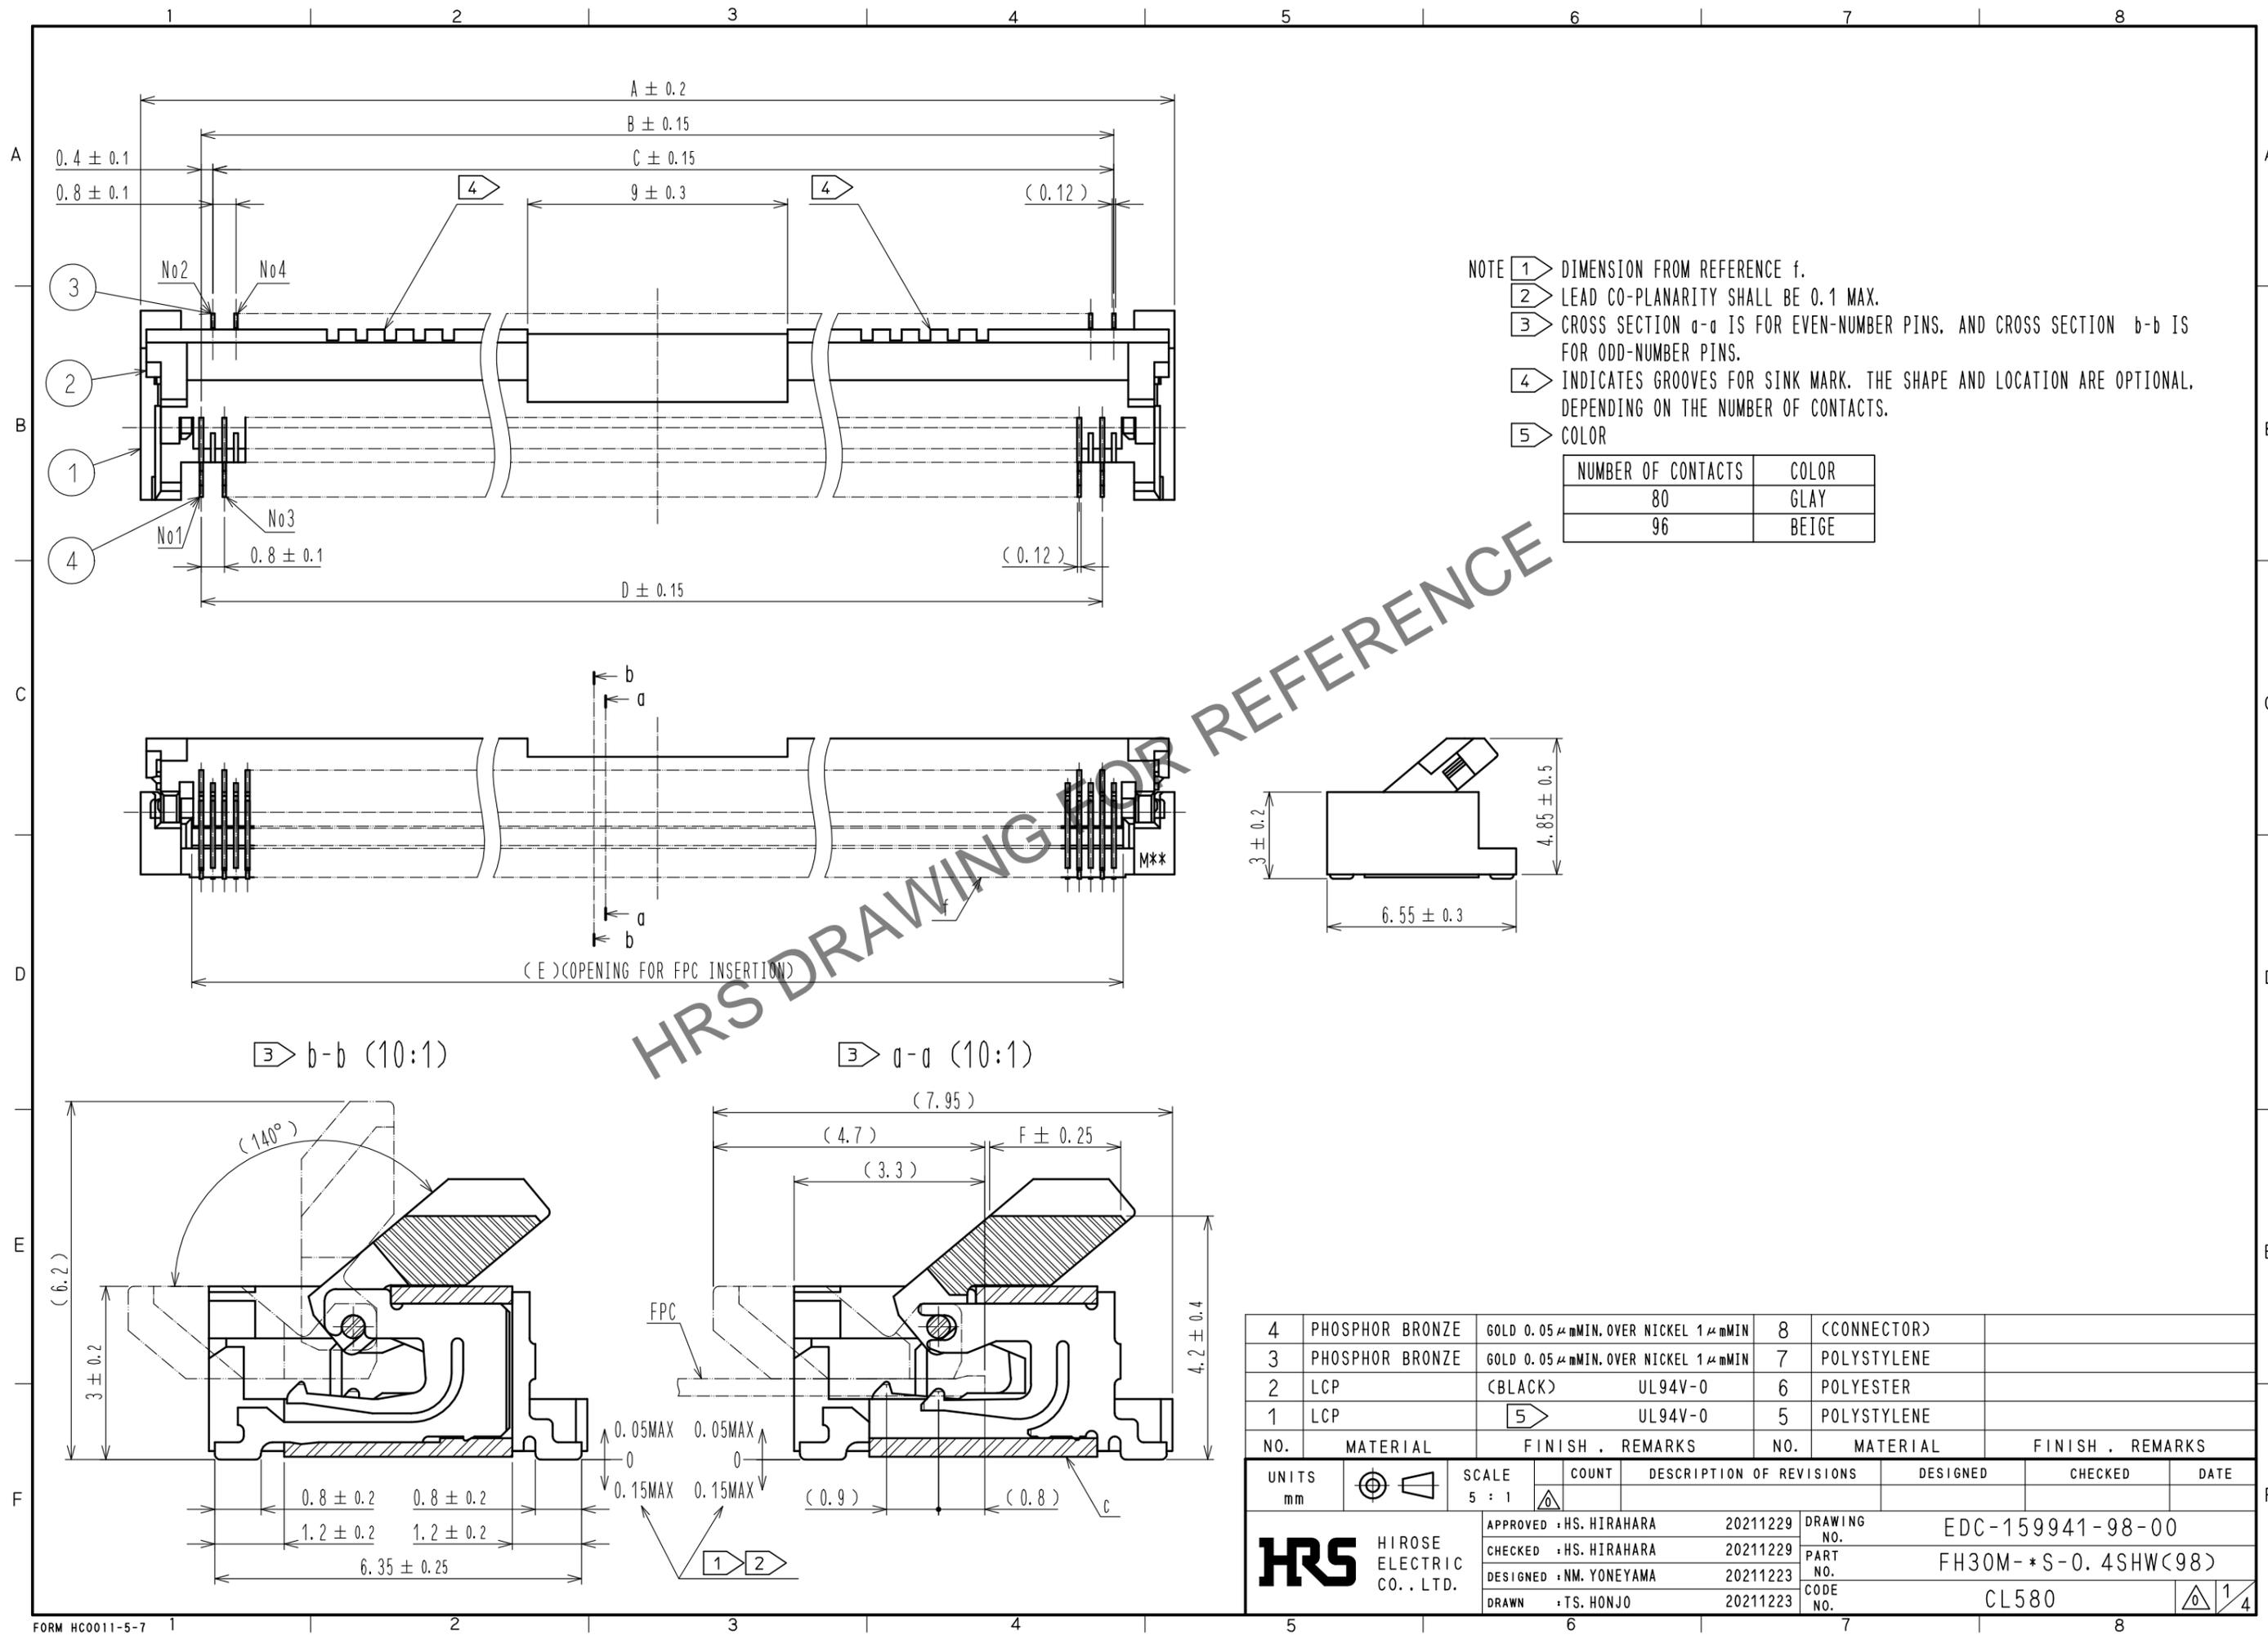

- NOTE
- 1 DIMENSION FROM REFERENCE f.
  - 2 LEAD CO-PLANARITY SHALL BE 0.1 MAX.
  - 3 CROSS SECTION a-a IS FOR EVEN-NUMBER PINS, AND CROSS SECTION b-b IS FOR ODD-NUMBER PINS.
  - 4 INDICATES GROOVES FOR SINK MARK. THE SHAPE AND LOCATION ARE OPTIONAL, DEPENDING ON THE NUMBER OF CONTACTS.
  - 5 COLOR

NUMBER OF CONTACTS	COLOR
80	GRAY
96	BEIGE

NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS
4	PHOSPHOR BRONZE	GOLD 0.05 μmMIN. OVER NICKEL 1 μmMIN	8	(CONNECTOR)			
3	PHOSPHOR BRONZE	GOLD 0.05 μmMIN. OVER NICKEL 1 μmMIN	7	POLYSTYLENE			
2	LCP	(BLACK)	6	POLYESTER			
1	LCP	(5)	5	POLYSTYLENE			


  

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	5 : 1	△				


<b>HRS</b> HIROSE ELECTRIC CO., LTD.	APPROVED : HS. HIRAHARA	20211229	DRAWING NO.	EDC-159941-98-00
	CHECKED : HS. HIRAHARA	20211229	PART NO.	FH30M-*S-0.4SHW(98)
	DESIGNED : NM. YONEYAMA	20211223	CODE NO.	CL580
	DRAWN : TS. HONJO	20211223		

Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

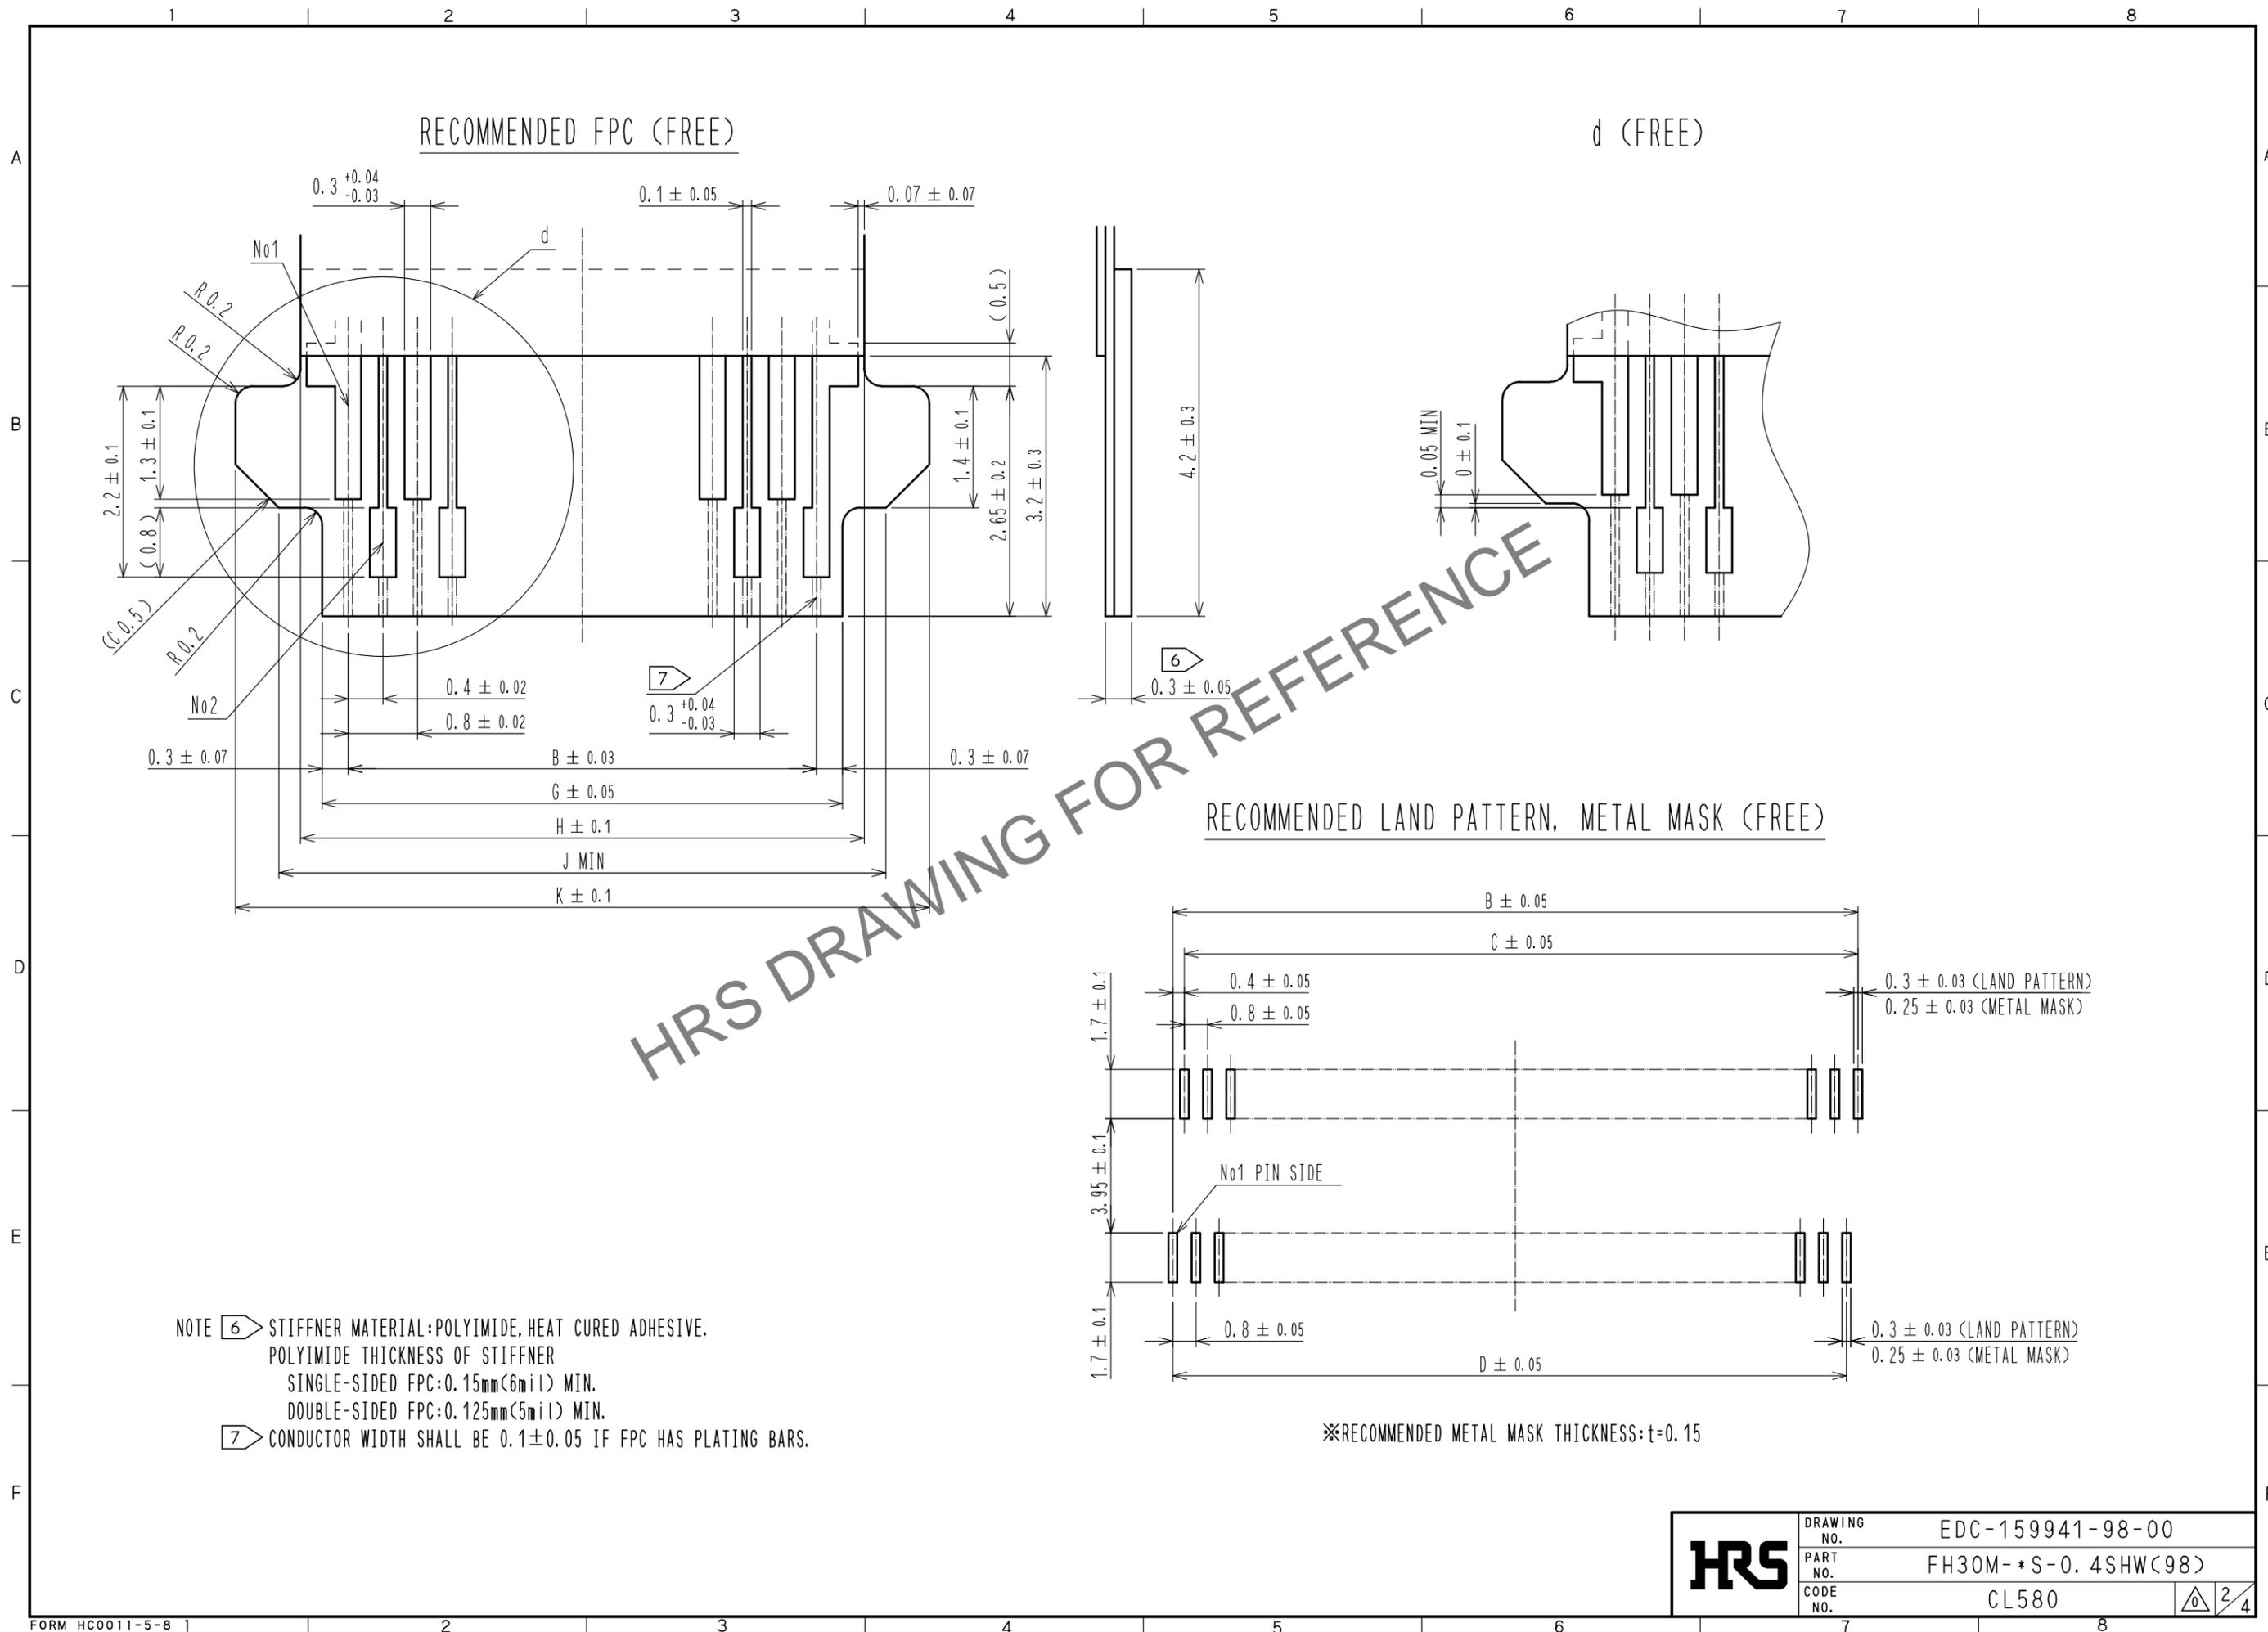

HRS DRAWING FOR REFERENCE

Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

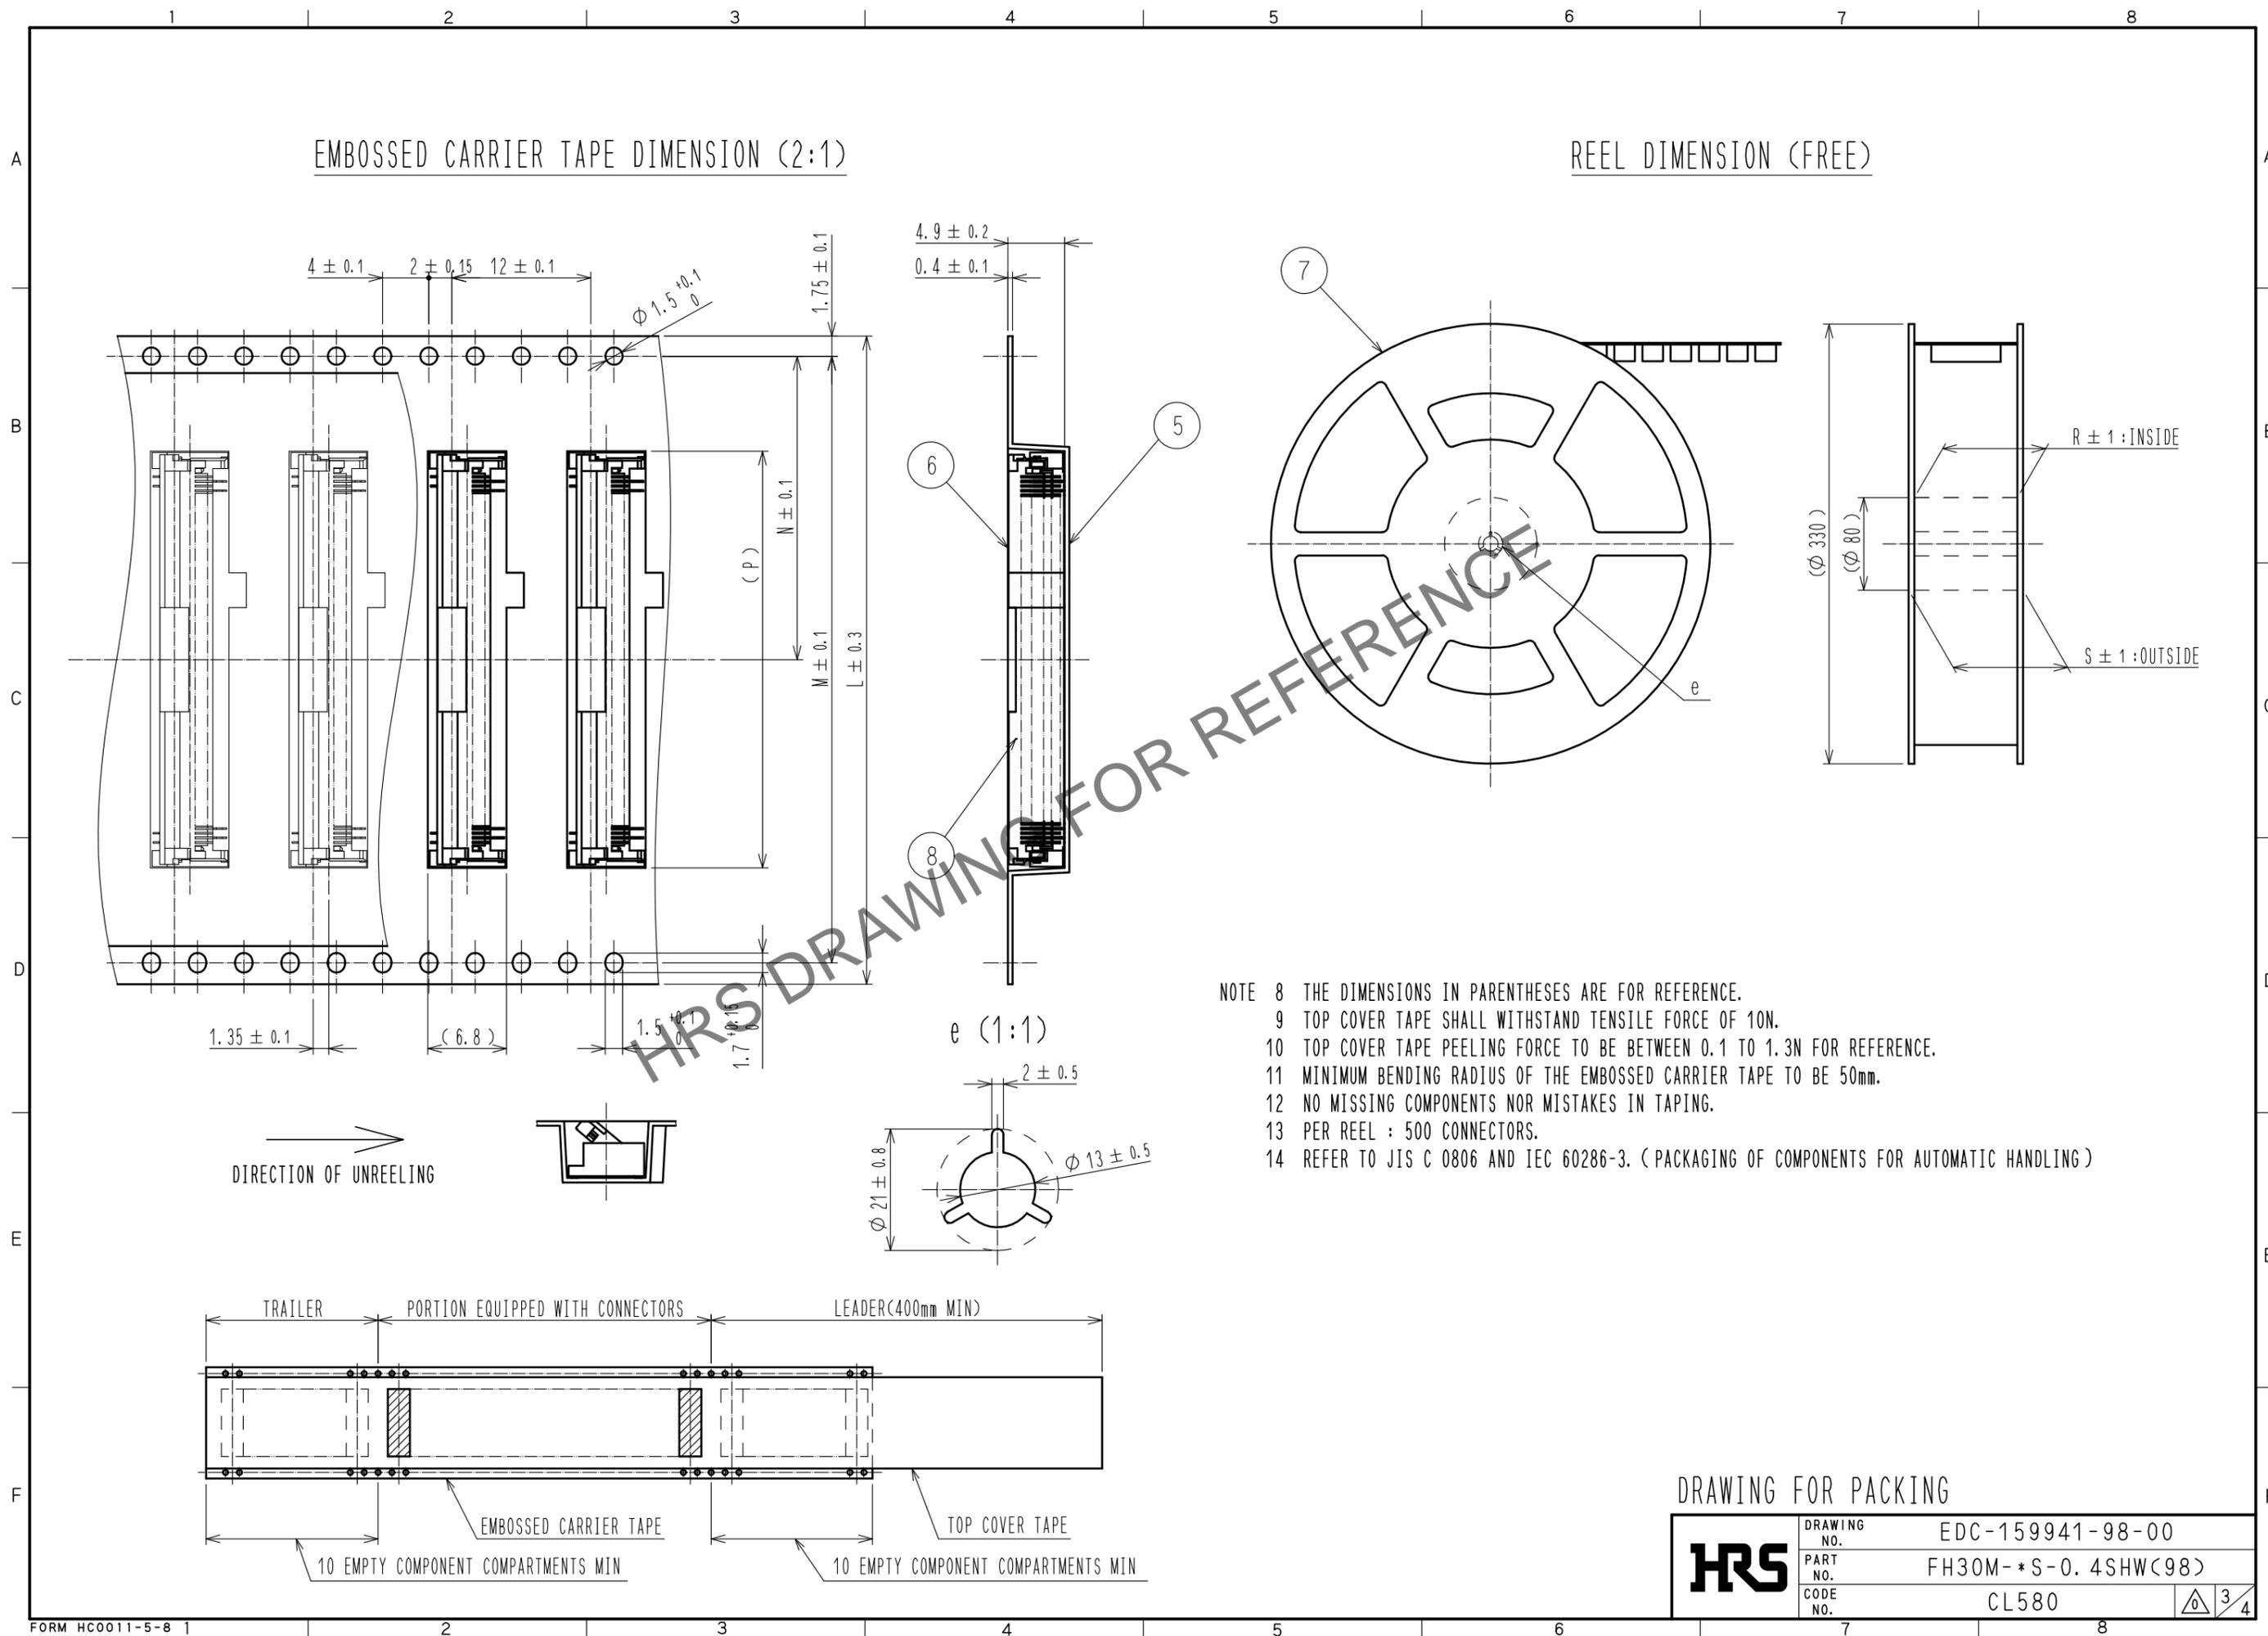

- NOTE 8 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.  
 9 TOP COVER TAPE SHALL WITHSTAND TENSILE FORCE OF 10N.  
 10 TOP COVER TAPE PEELING FORCE TO BE BETWEEN 0.1 TO 1.3N FOR REFERENCE.  
 11 MINIMUM BENDING RADIUS OF THE EMBOSSED CARRIER TAPE TO BE 50mm.  
 12 NO MISSING COMPONENTS NOR MISTAKES IN TAPING.  
 13 PER REEL : 500 CONNECTORS.  
 14 REFER TO JIS C 0806 AND IEC 60286-3. (PACKAGING OF COMPONENTS FOR AUTOMATIC HANDLING)

DRAWING FOR PACKING

<b>HRS</b>	DRAWING NO.	EDC-159941-98-00
	PART NO.	FH30M-*S-0.4SHW(98)
	CODE NO.	CL580
		3/4

Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

CONNECTOR, FPC, LAND PATTERN, METAL MASK DIMENSION

PART NO.	CODE NO.	NUMBER OF CONTACT	A	B	C	D	E	F	G	H	J	K
FH30M-80S-0.4SHW(98)	CL0580-0102-0-98	80	35.8	31.6	31.2	31.2	32.25	2.27	32.2	32.7	33.2	34.2
FH30M-96S-0.4SHW(98)	CL0580-0103-2-98	96	42.2	38	37.6	37.6	38.65	2.02	38.6	39.1	39.6	40.6

PACKING DIMENSION

PART NO.	CODE NO.	NUMBER OF CONTACT	L	M	N	P	R	S
FH30M-80S-0.4SHW(98)	CL0580-0102-0-98	80	56	52.4	26.2	36	57.4	61.4
FH30M-96S-0.4SHW(98)	CL0580-0103-2-98	96	56	52.4	26.2	42.4	57.4	61.4

HRS DRAWING FOR REFERENCE

<b>HRS</b>	DRAWING NO.	EDC-159941-98-00	
	PART NO.	FH30M-*S-0.4SHW(98)	
	CODE NO.	CL580	△ 4/4