


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

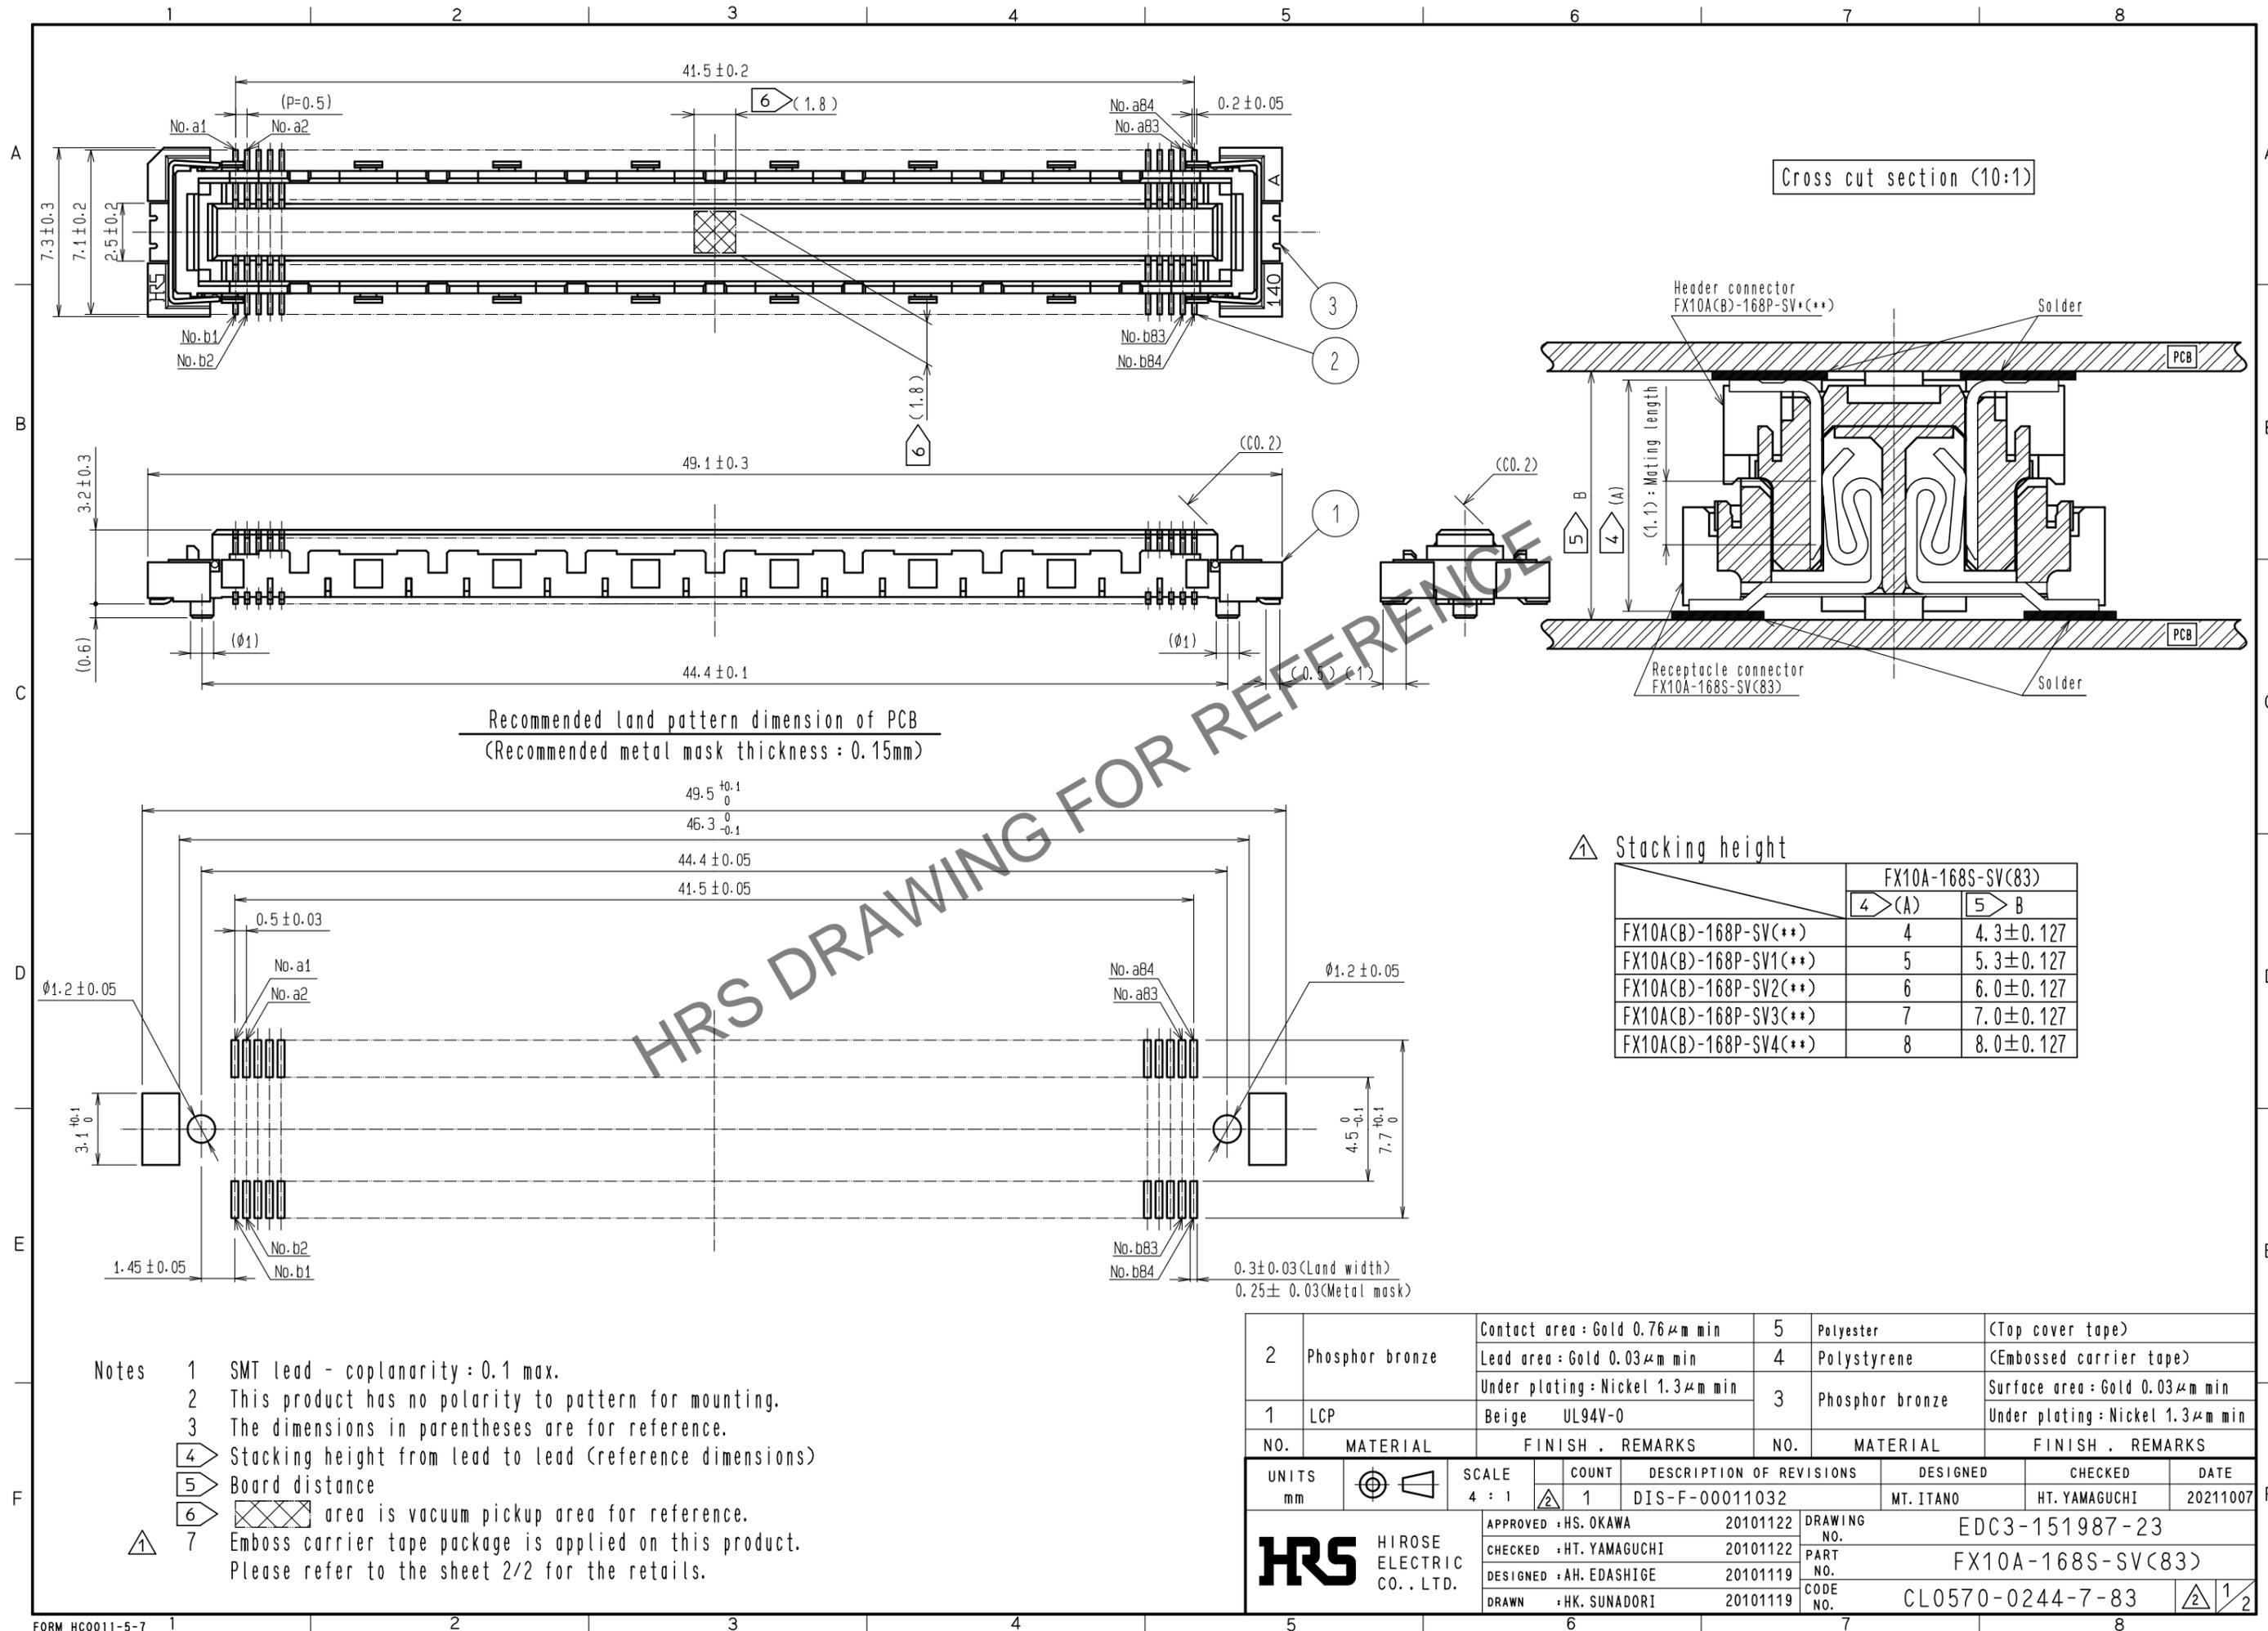


HRS DRAWING FOR REFERENCE



2	Phosphor bronze	Contact area : Gold 0.76 μm min	5	Polyester	(Top cover tape)
		Lead area : Gold 0.03 μm min	4	Polystyrene	(Embossed carrier tape)
		Under plating : Nickel 1.3 μm min	3	Phosphor bronze	Surface area : Gold 0.03 μm min
1	LCP	Beige UL94V-0			Under plating : Nickel 1.3 μm min
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 4 : 1	COUNT 1	DESCRIPTION OF REVISIONS	
DIS-F-00011032		DESIGNED MT. ITANO	CHECKED HT. YAMAGUCHI	DATE 20211007	
APPROVED : HS. OKAWA 20101122		DRAWING NO. EDC3-151987-23			
CHECKED : HT. YAMAGUCHI 20101122		PART NO. FX10A-168S-SV(83)			
DESIGNED : AH. EDASHIGE 20101119		CODE NO. CL0570-0244-7-83			
DRAWN : HK. SUNADORI 20101119					

Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



# Drawing for packing (2:1)

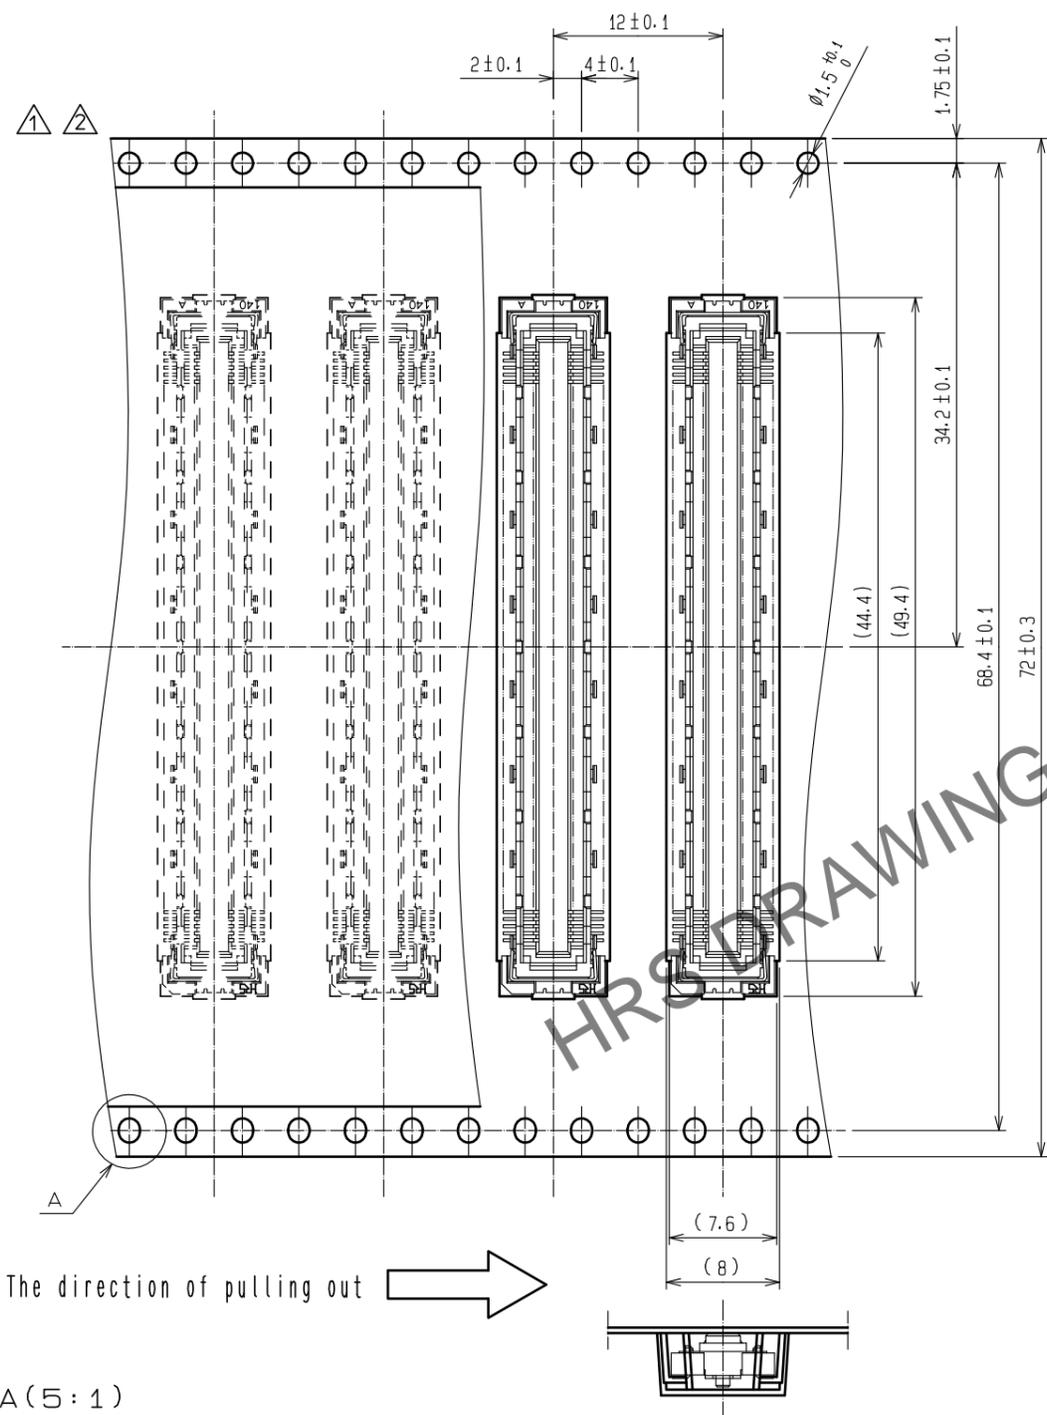

A (5:1)

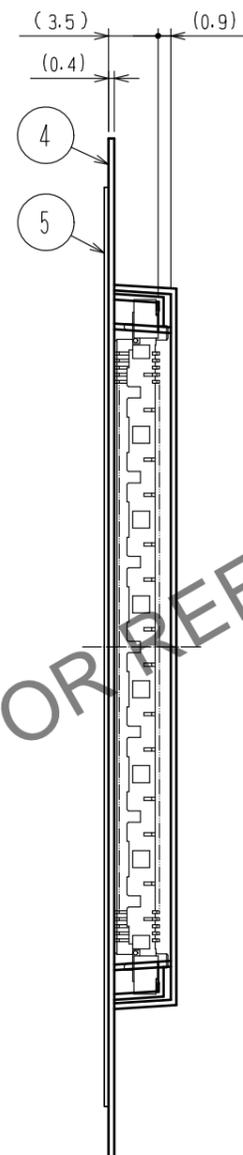

Reeled dimension (Free)

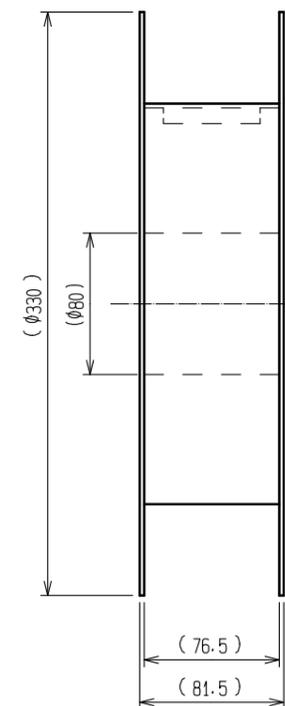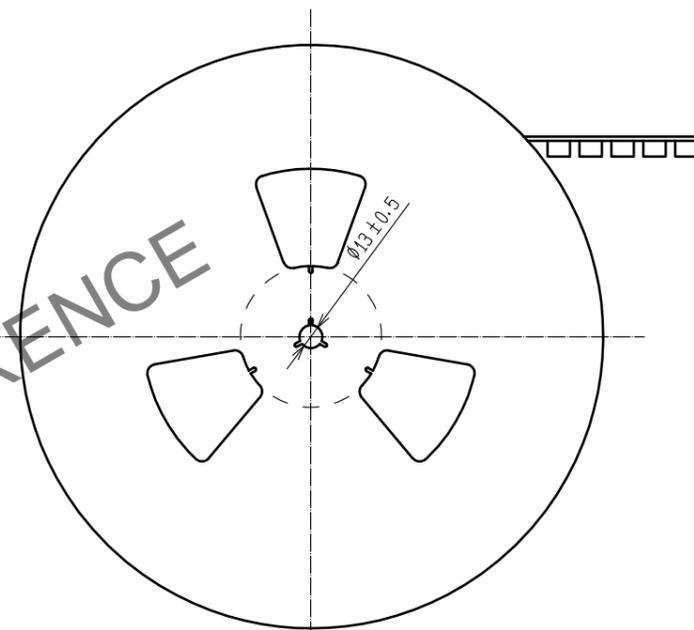

- Notes
- 8 1reel : 1.000 connectors.
  - 9 Minimum 10 compartments from both reel ends remain empty.
  - 10 This product has no polarity to tape and reel packaging.
  - 11 The dimensions in parentheses are for reference.

<b>HRS</b>	DRAWING NO.	EDC3-151987-23
	PART NO.	FX10A-168S-SV(83)
	CODE NO.	CL0570-0244-7-83
		$\triangle 2$ / $2$