



In-case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


Dec.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

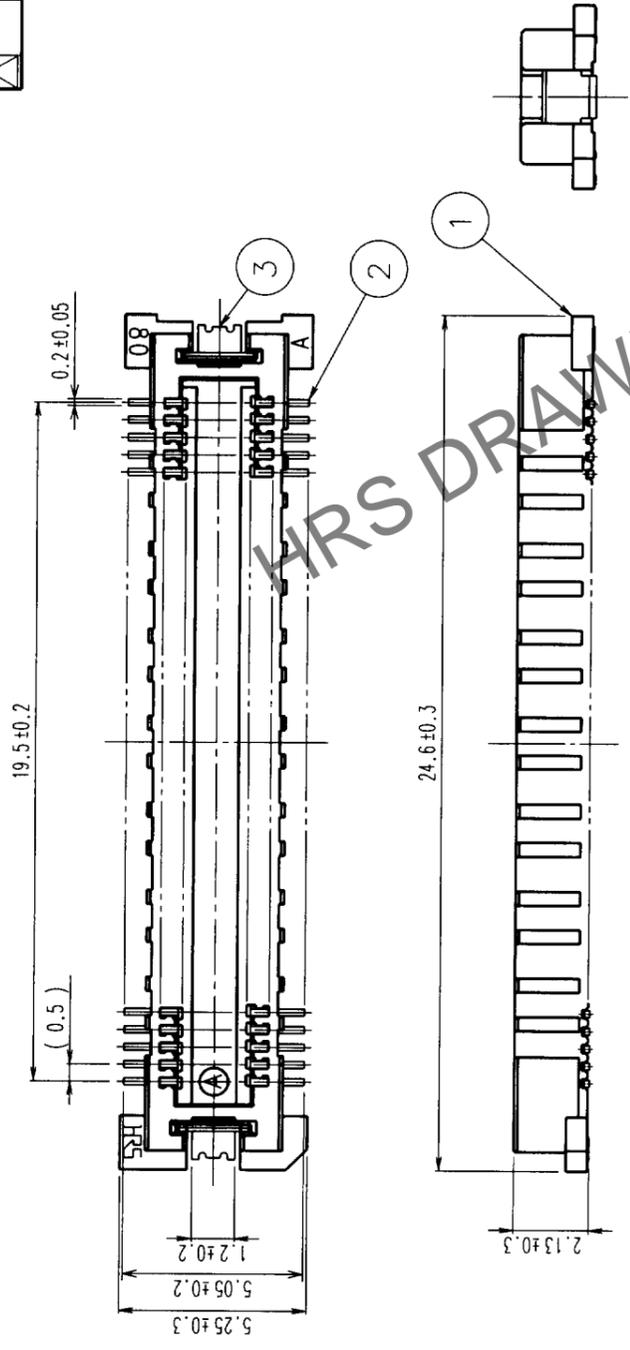

RECOMMENDED LAND PATTERN DIMENSION OF PCB

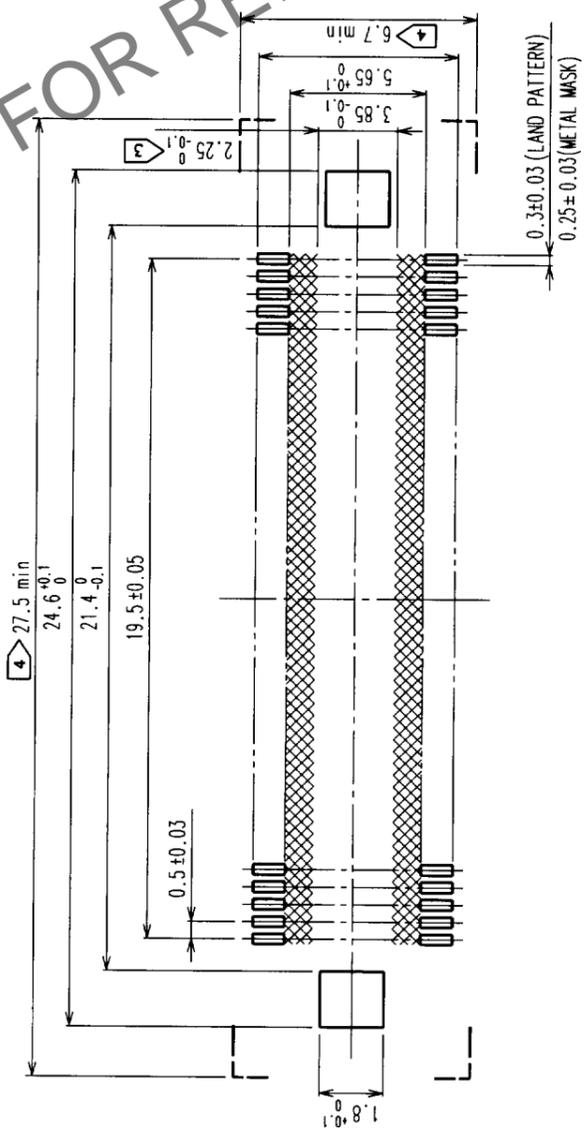

SIGNAL PORTION CROSS SECTION (10:1)

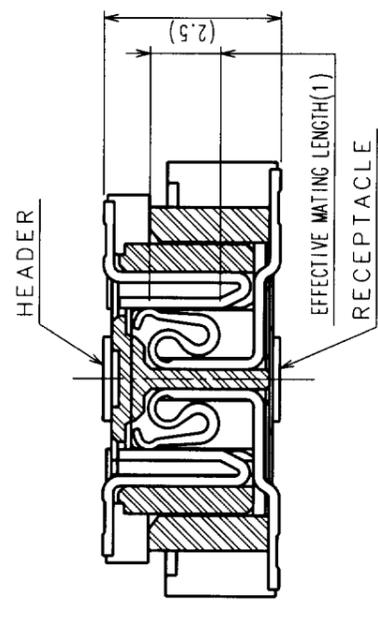

- NOTES
- 1 SMT LEAD-COPLANARITY: 0.1 MAX.
 - 2 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - 3 MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND ,OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
 - 4 DO NOT MOUNT OTHER DEVICES ONTO [] AREA ,OR MATING PAIR CANNOT BE MATED.

2	COPPER ALLOY	CONTACT AREA:GOLD(0.1µm) OVER NICKEL	
1	LCP	LEAD:GOLD FLASH OVER NICKEL	
NO.	MATERIAL	FINISH, REMARKS	
CODE NO. (OLD)	CL		
NO.	MATERIAL	FINISH, REMARKS	
3	PHOSPHOR BRONZE	TIN PLATED	
DESIGNED	CHECKED	APPROVED	RELEASED
<i>H. Okawa</i>	<i>H. Okawa</i>	<i>Y. Yoshimura</i>	
00.08.28	00.08.28	00.08.28	00.05.09
DRAWING NO.		PART NO.	
EDC3-152613		FX11B-80P-SV	
SCALE	5 : 1	CODE NO.	CL573-0558-4
UNITS	mm	HIROSE ELECTRIC CO.,LTD.	

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1					1				
2					2				
3					3				

TO
PCK