


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
3	RE-F-06522	J.M	99.9.7						




28.6±0.3

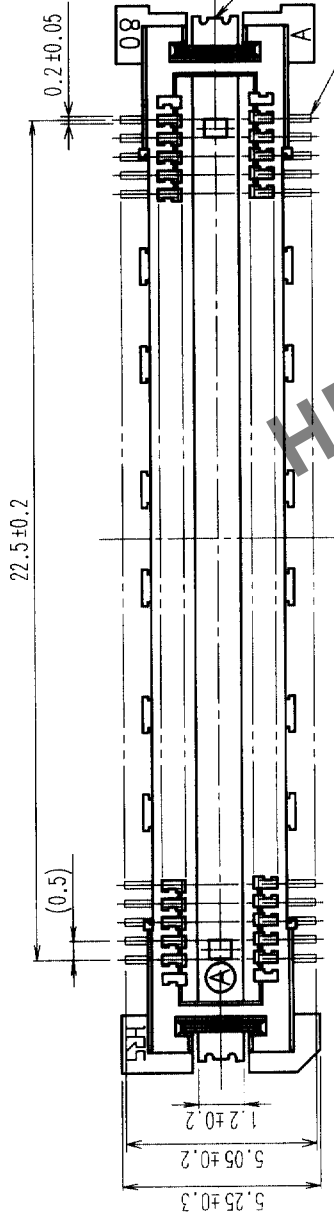


Δ (REVISED CONFIGURATION)

RECOMMENDED LAND PATTERN DIMENSION OF PCB

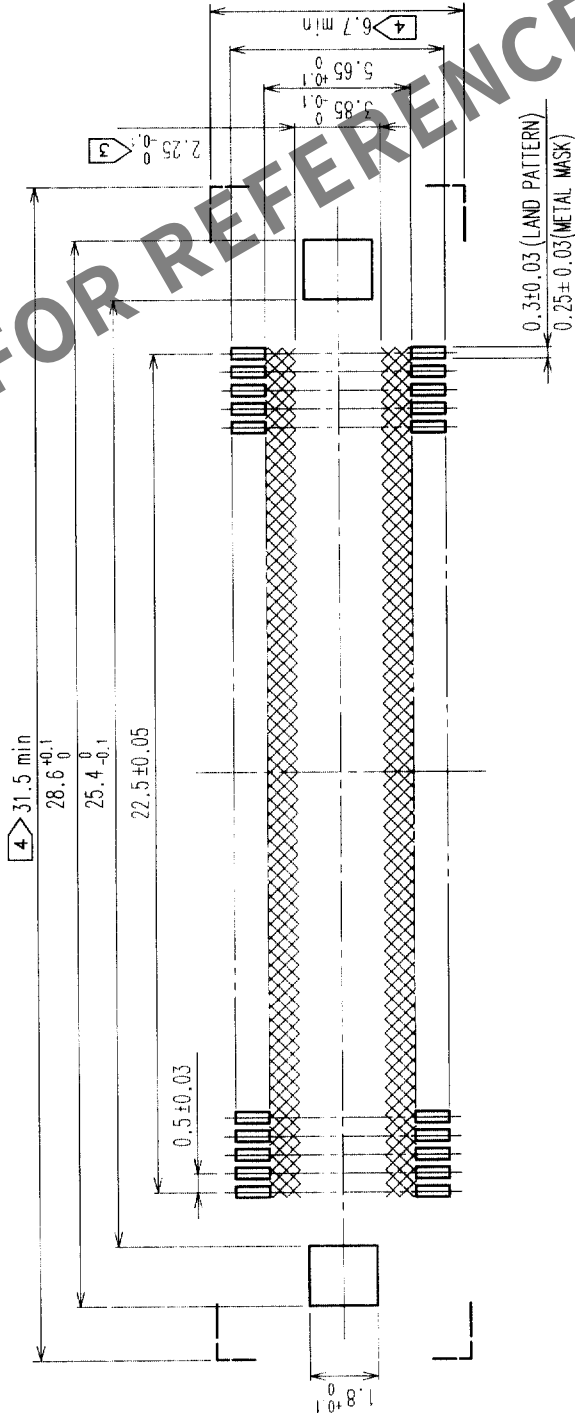

Δ SIGNAL PORTION CROSS SECTION (10:1)

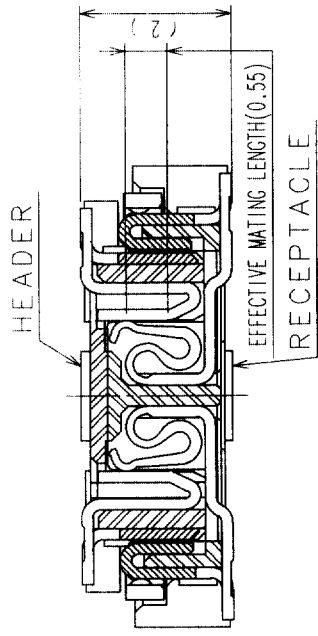

- NOTES 1 SMT LEAD-COPLANARITY:0.1 MAX.
2 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
3 MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND ,OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
4 DO NOT MOUNT OTHER DEVICES ONTO □ AREA ,OR MATING PAIR CANNOT BE MATED.

2	COPPER ALLOY	CONTACT AREA: GOLD (0.1μm) OVER NICKEL
1	LCP	LEAD: GOLD FLASH OVER NICKEL
NO.	MATERIAL	FINISH, REMARKS
3	PHOSPHOR BRONZE	TIN PLATED
CODE NO. (OLD)	CL	
CODE NO. (NEW)	S.Kitajima	J.Matsukawa
990525	990525	990526
990526	990526	990526
DRAWING NO.	EDC3-152105	PART NO. FX11LB-92P-SV
SCALE	5:1	CODE NO. CL573-0053-8
UNITS	mm	

TO
PCK