


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

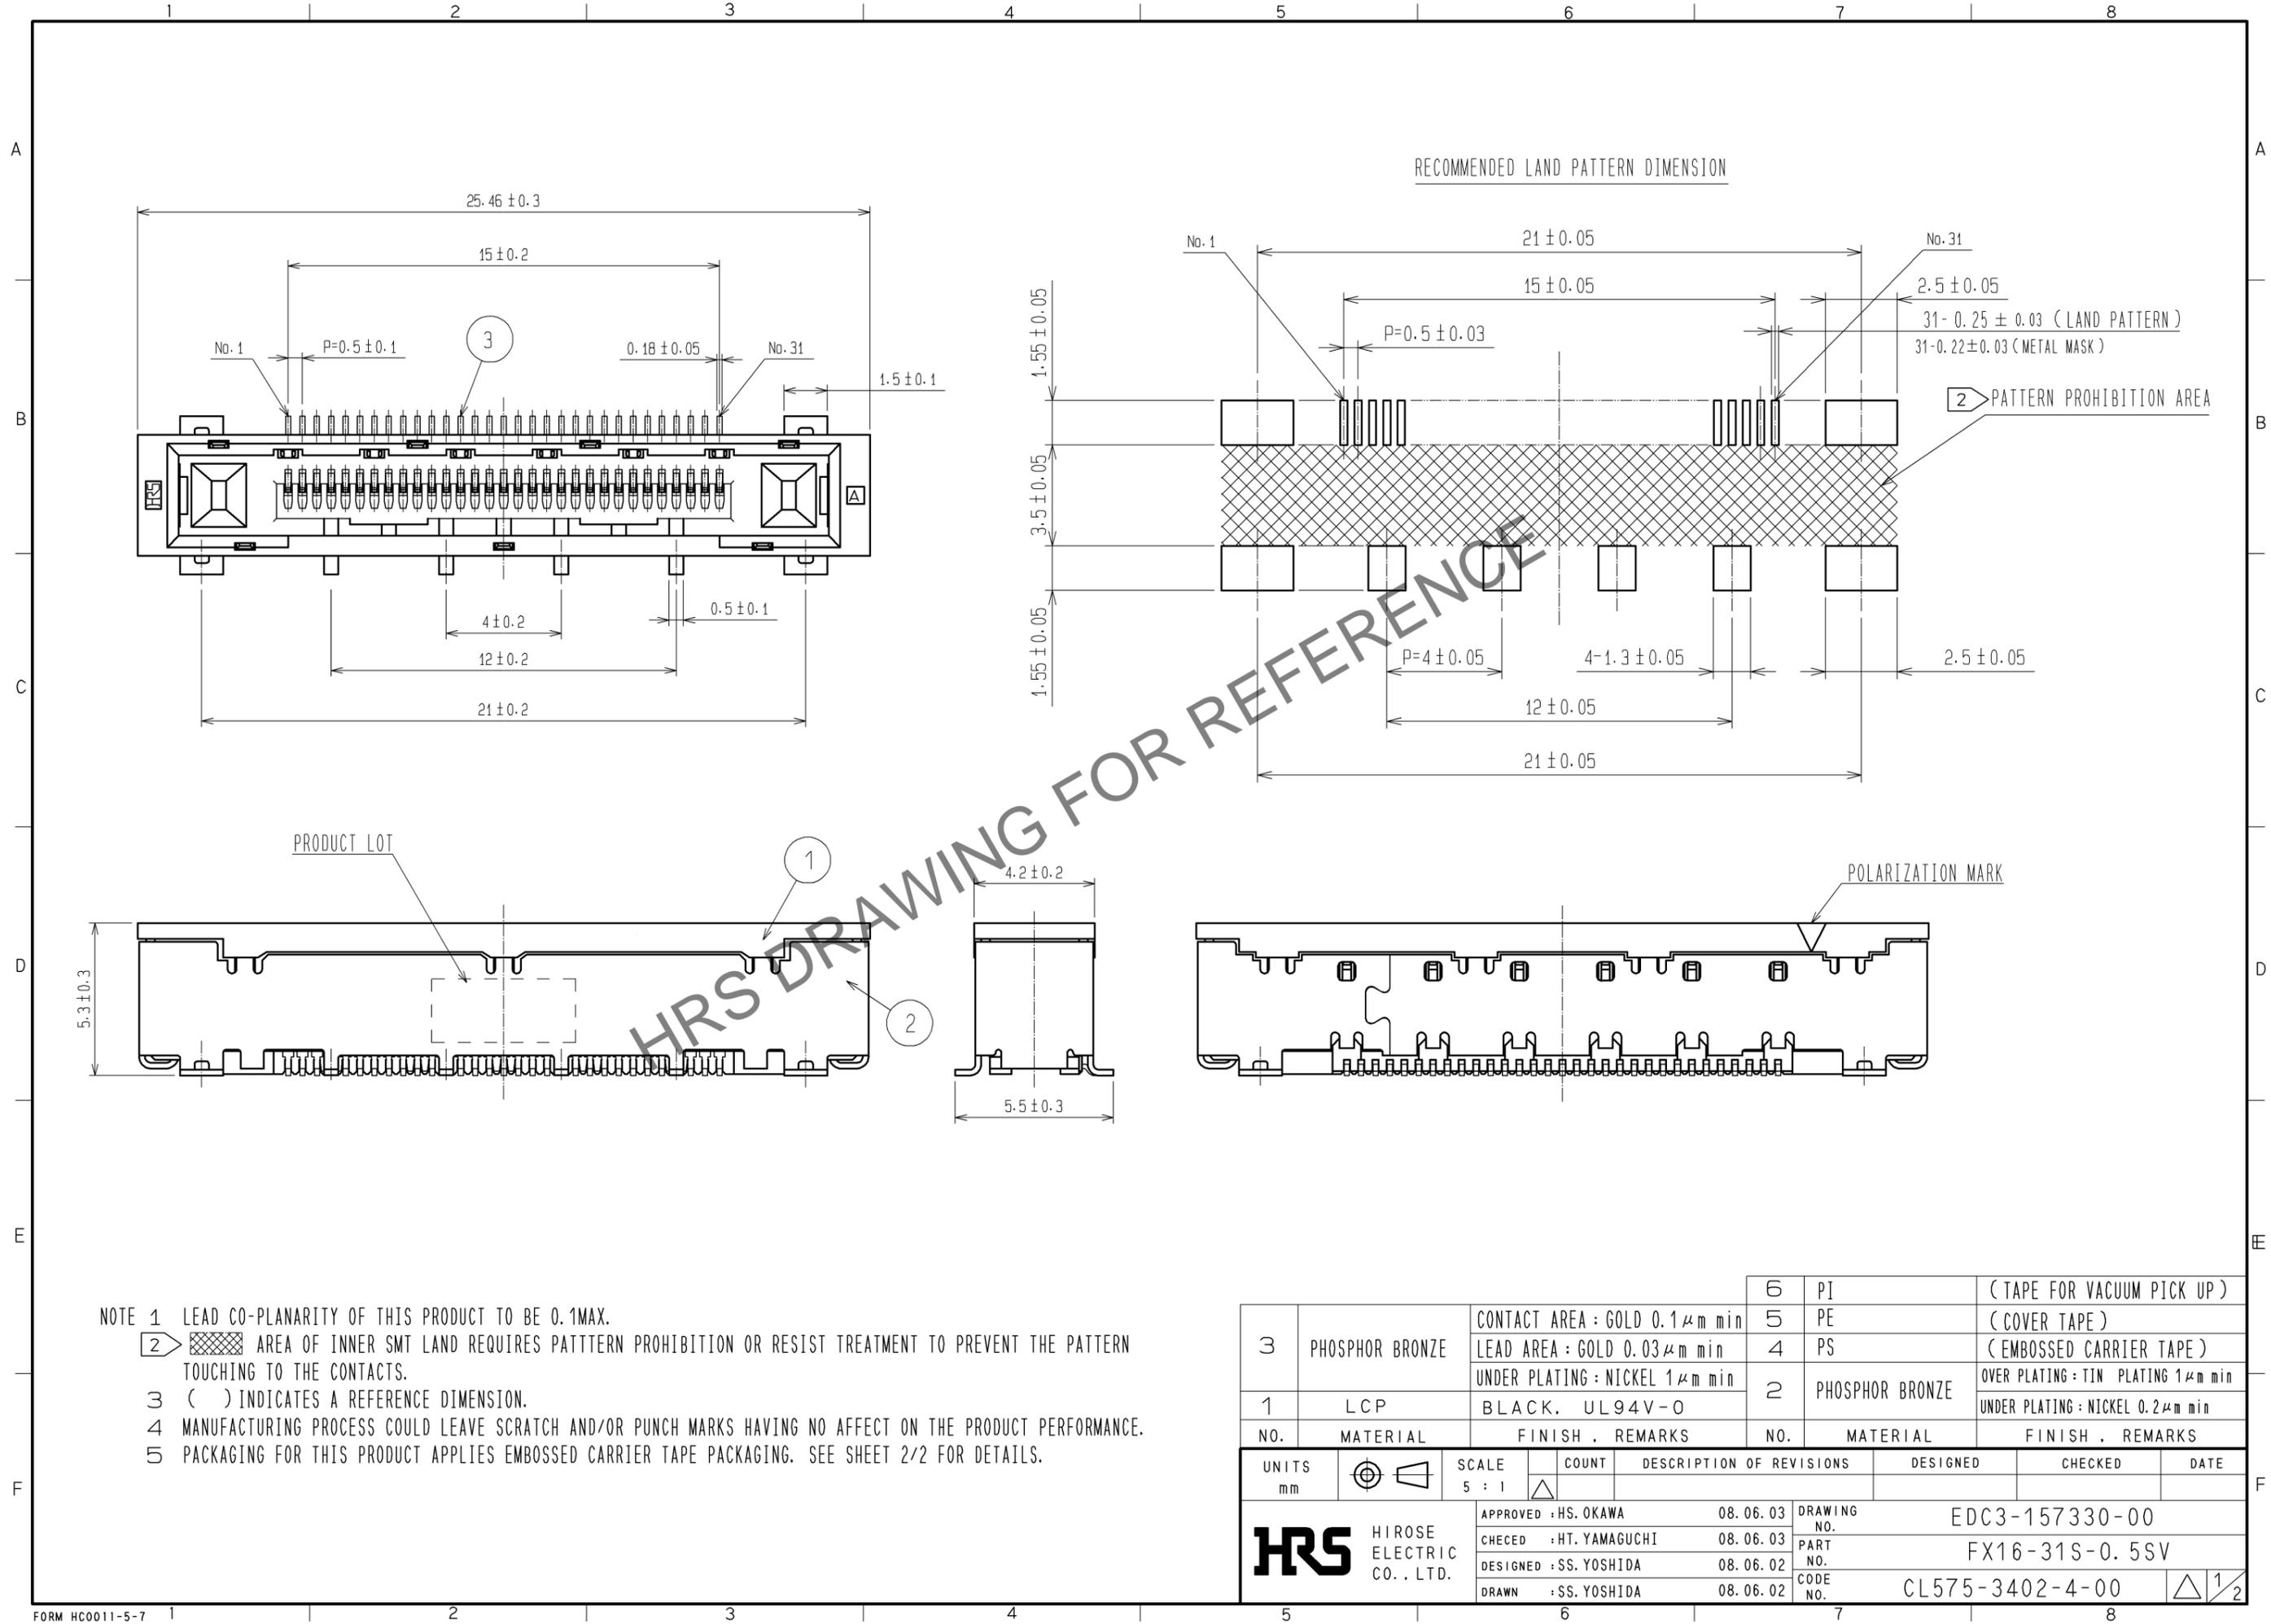







- NOTE 1 LEAD CO-PLANARITY OF THIS PRODUCT TO BE 0.1MAX.
- 2 AREA OF INNER SMT LAND REQUIRES PATTERN PROHIBITION OR RESIST TREATMENT TO PREVENT THE PATTERN TOUCHING TO THE CONTACTS.
- 3 ( ) INDICATES A REFERENCE DIMENSION.
- 4 MANUFACTURING PROCESS COULD LEAVE SCRATCH AND/OR PUNCH MARKS HAVING NO AFFECT ON THE PRODUCT PERFORMANCE.
- 5 PACKAGING FOR THIS PRODUCT APPLIES EMBOSSED CARRIER TAPE PACKAGING. SEE SHEET 2/2 FOR DETAILS.

3	PHOSPHOR BRONZE	CONTACT AREA : GOLD 0.1 μm min	6	PI	(TAPE FOR VACUUM PICK UP)
		LEAD AREA : GOLD 0.03 μm min	5	PE	(COVER TAPE)
		UNDER PLATING : NICKEL 1 μm min	4	PS	(EMBOSSED CARRIER TAPE)
1	LCP	BLACK. UL94V-0	2	PHOSPHOR BRONZE	OVER PLATING : TIN PLATING 1 μm min
					UNDER PLATING : NICKEL 0.2 μm min
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 5 : 1	COUNT		DESCRIPTION OF REVISIONS
DESIGNED		CHECKED		DATE	
APPROVED : HS. OKAWA 08.06.03			DRAWING NO. EDC3-157330-00		
CHECKED : HT. YAMAGUCHI 08.06.03			PART NO. FX16-31S-0.5SV		
DESIGNED : SS. YOSHIDA 08.06.02			CODE NO. CL575-3402-4-00		
DRAWN : SS. YOSHIDA 08.06.02			1/2		

Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

DRAWING FOR PACKING (2:1)

THE DIRECITON OF PULLING OUT

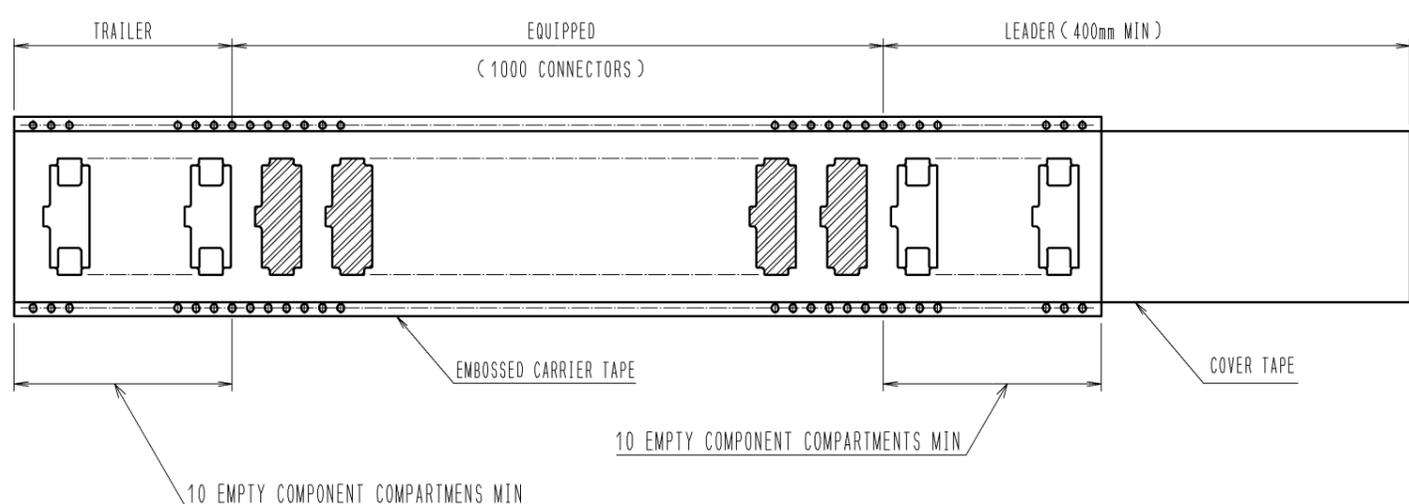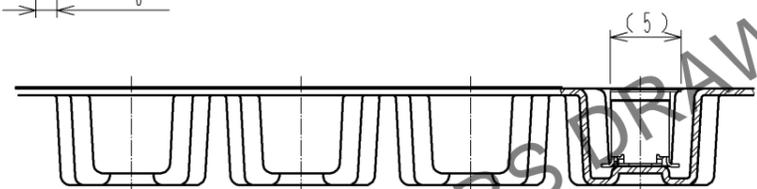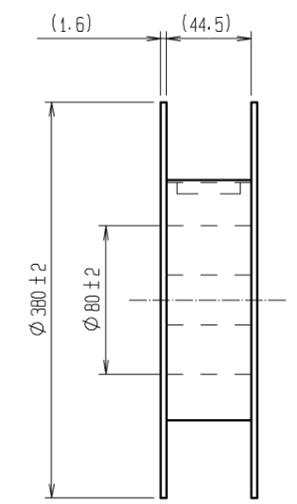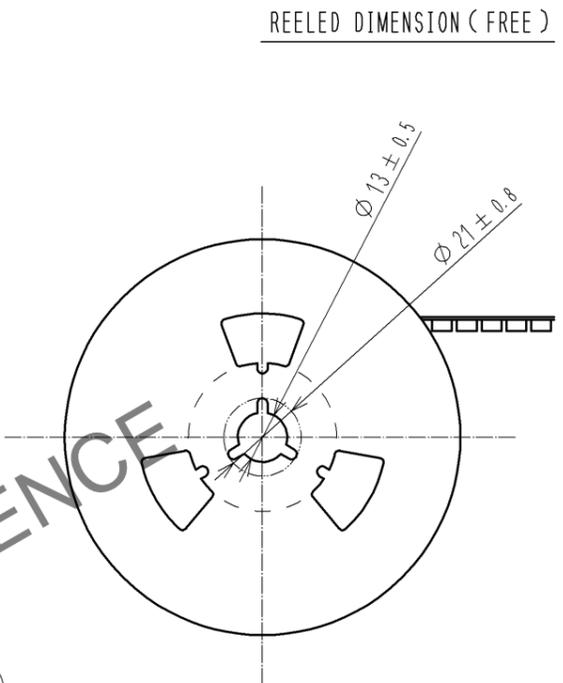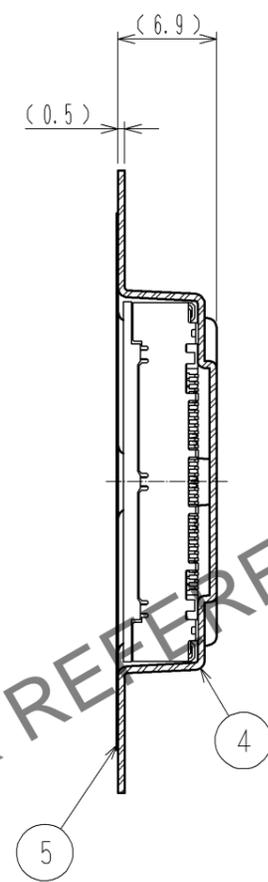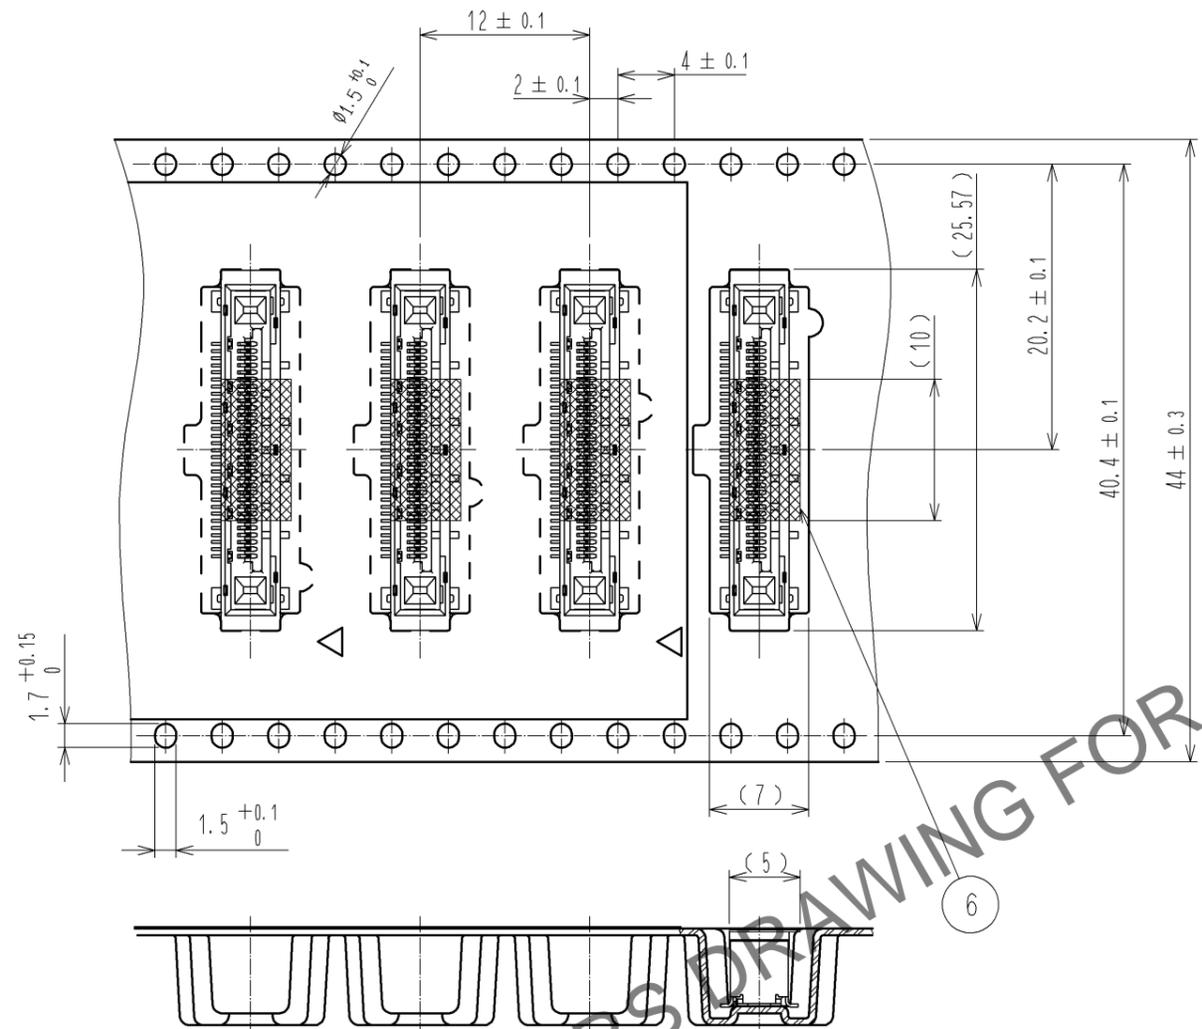

<b>HRS</b>	DRAWING NO.	EDC3-157330-00	△ 2/2
	PART NO.	FX16-31S-0.5SV	
	CODE NO.	CL575-3402-4-00	