


Dec.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

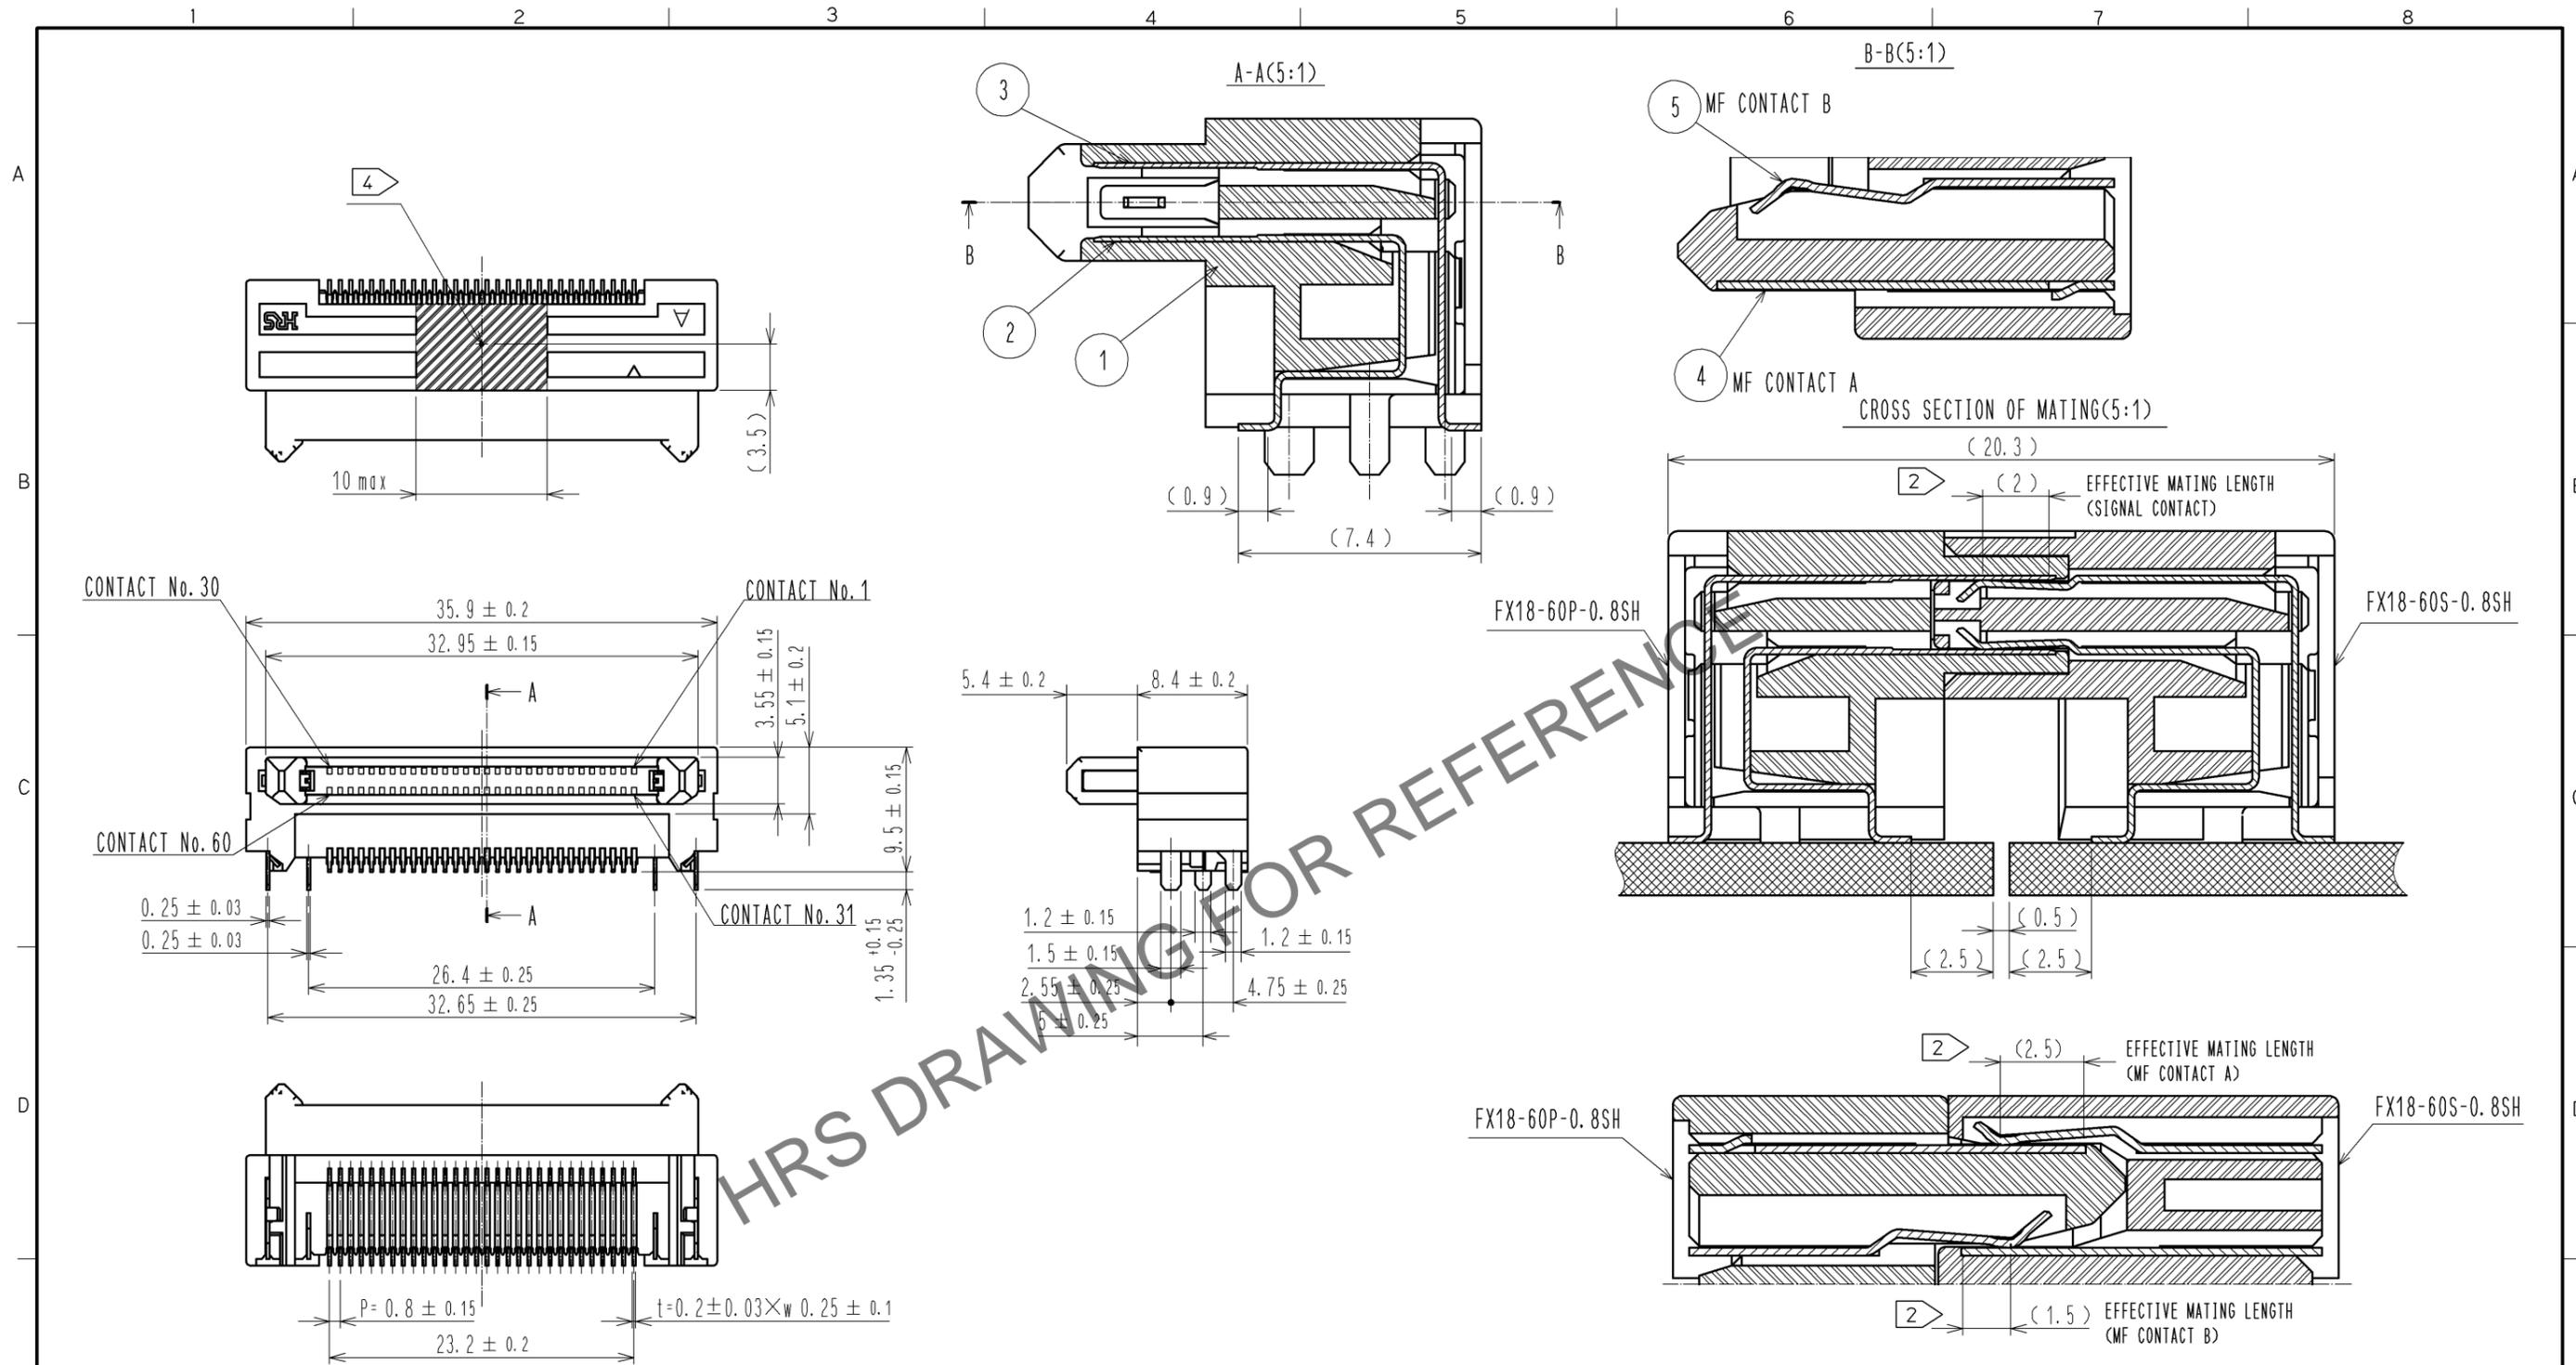

- NOTE 1 LEAD CO-PLANARITY IS 0.1mm MAX.  
 ② CONTACTS ARE 3 STEPS SEQUENTIAL. (MF CONTACT A=>SIGNAL CONTACT=>MF CONTACT B) WHEN USING THIS SEQUENTIAL STRUCTURE, PLEASE AVOID ANGLED INSERTION.  
 3 MF CONTACT A AND MF CONTACT B CAN BE USED AS POWER SUPPLY CONTACT. (3A/PIN MAX)  
 ④ IT SHOWS CONNECTOR'S CENTRE OF GRAVITY AND VACUUM PICKUP AREA.  
 ⑤ THIS IS PACKAGED IN TRAY. (60pcs/TRAY)  
 6 BLEMISH AND HIT MARK CAN BE OCCURED THROUGH OUT THE MANUFACTURING PROCESS WHICH DOESN' T AFFECT QUALITY LEVEL.  
 7 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCES.

NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS
3	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1µm	6	POLYSTYRENE	CONTACT AREA:GOLD 0.1µm	5	PHOSPHOR BRONZE
		LEAD AREA:GOLD 0.03µm			LEAD AREA:TIN-PLATING 1µm		
		UNDER PLATING:NICKEL 1.3µm			UNDER PLATING:NICKEL 1.3µm		
2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1µm	4	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1µm	4	PHOSPHOR BRONZE
		LEAD AREA:GOLD 0.03µm			LEAD AREA:TIN-PLATING 1µm		
		UNDER PLATING:NICKEL 1.3µm			UNDER PLATING:NICKEL 1.3µm		
1	POLYAMIDE	BLACK	UL94V-0				


UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	4	DIS-F-005578	TH. SANO	KI. HIROKAWA	11.07.21

APPROVED	CHECED	DESIGNED	DRAWN	DRAWING NO.	PART NO.	CODE NO.
HS. OKAWA	KI. HIROKAWA	TH. SANO	TH. SANO	EDC3-159075-00	FX18-60P-0.8SH	CL579-0003-8-00
09.10.09	09.10.09	09.10.09	09.10.09			


Dec.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

RECOMMENDED LAND PATTERN DIMENSION OF PCB(2:1)  
(PCB THICKNESS:t=1.6mm, METAL MASK THICKNESS:t=0.12mm)

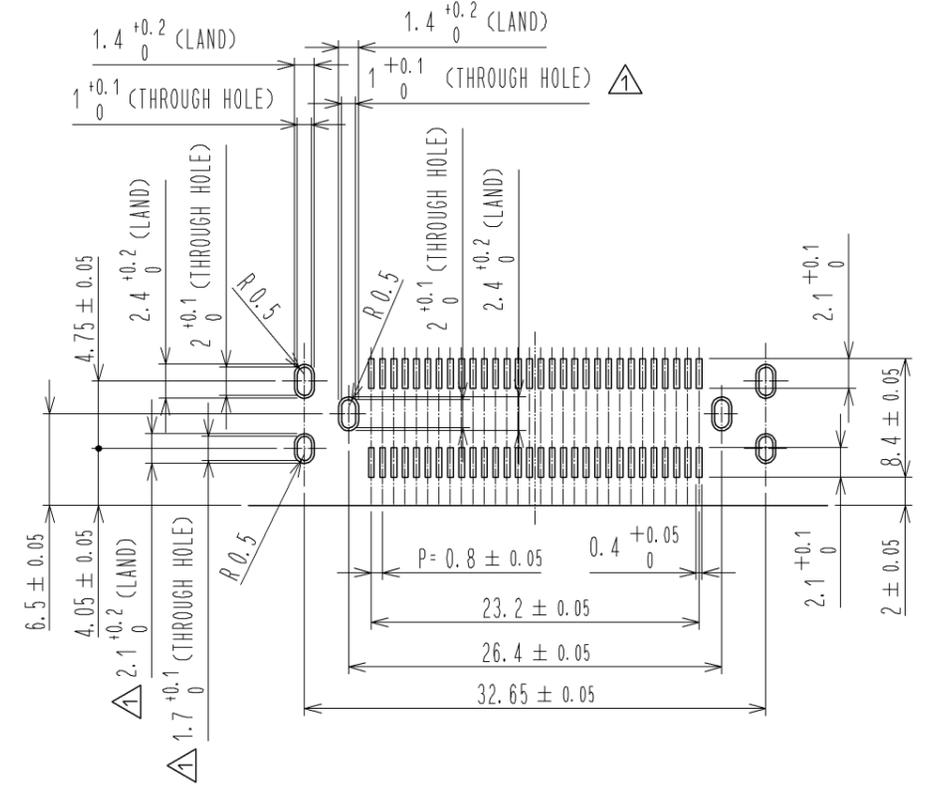

8 CONFIGURATION OF MF CONTACT A

CONTACT AREA OF MF CONTACT A

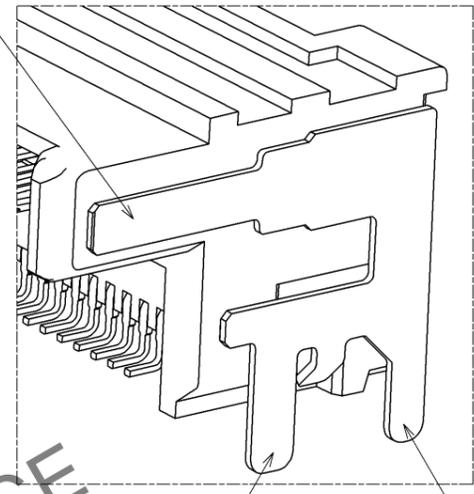


SOLDERING POLE2 OF MF CONTACT A

SOLDERING POLE1 OF MF CONTACT A

NOTE 8 SOLDERING LEAD OF MF CONTACT A SPLITS INTO TWO POLES.  
BE SURE TO CONNECT TO THE SAME CIRCUIT.


5 DRAWING FOR PACKING(1:2)

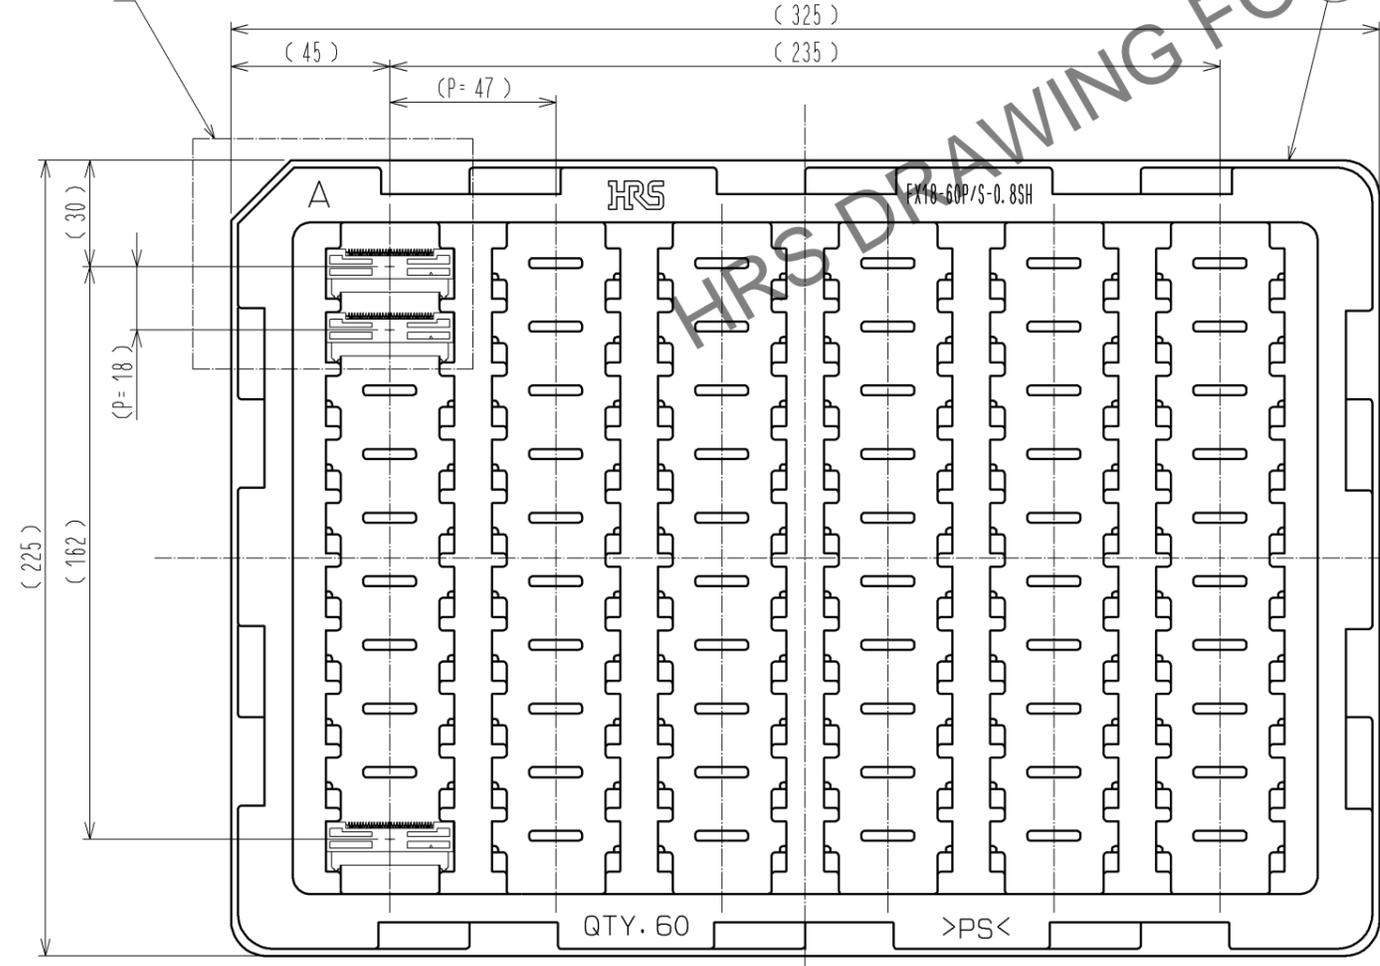

(18)

C(1:1)

FX18-60P-0.8SH

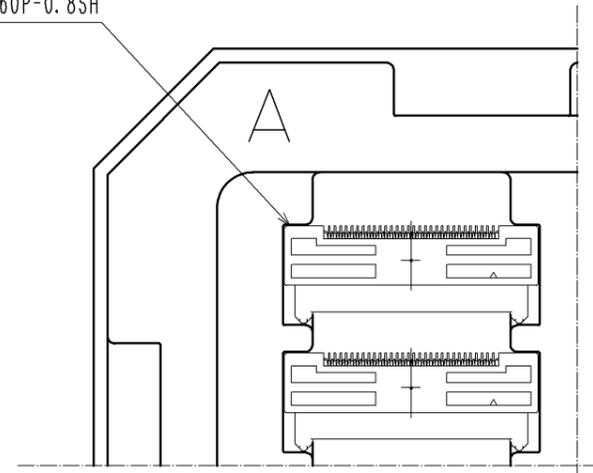

<b>HRS</b>	DRAWING NO.	EDC3-159075-00	2/2
	PART NO.	FX18-60P-0.8SH	
	CODE NO.	CL579-0003-8-00	