

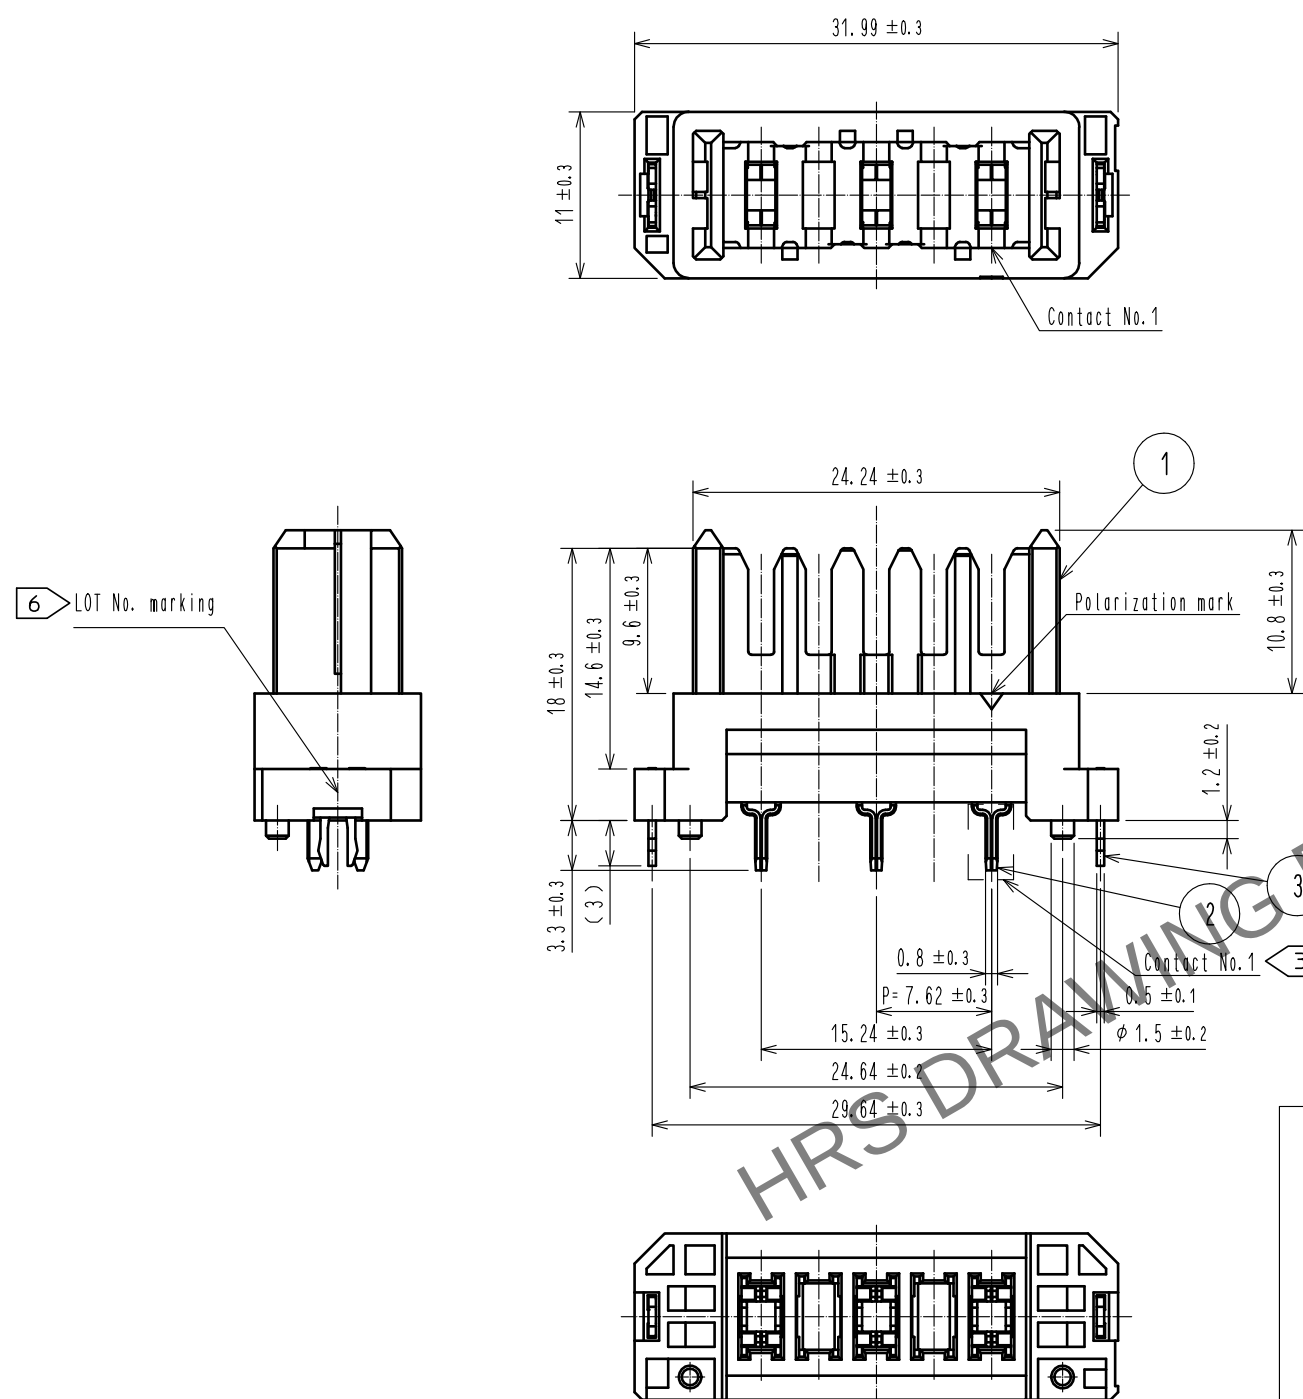
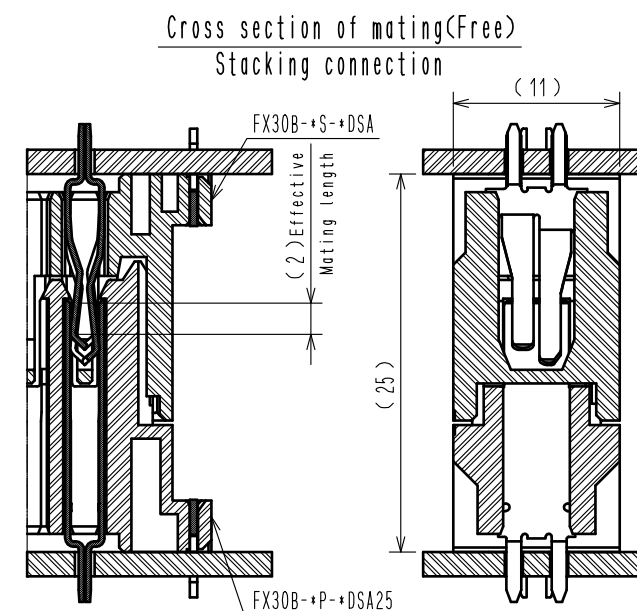


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

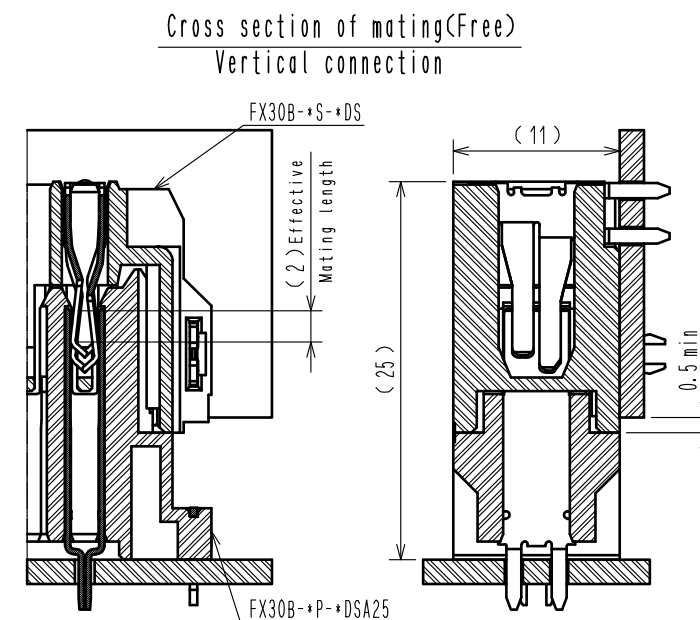

- Note
- 1 This product is packaged in tray. (35 pcs/tray)
 - 2 Blemish and hit mark can be occurred through out the manufacturing process which doesn't affect quality level. Also, black spot could be observed on the surface of housing.
 - 3 For the contact No., adjacent two pairs of leads placed back-to-back (4 leads in total) compose one line.
 - 4 Misalignment absorbing range: ± 0.3 mm max.
 - 5 The dimension in parentheses are for references.
 - 6 Lot No. is indicated at either one of the position as shown.
 - 7 UL (File No. E52653)
C-UL (File No. E52653)
TUV (Certificate No. R50275872) authorization article.



2	Copper alloy	Contact area:Gold-plating 0.1㎍m		4	Polystyrene					
		Lead area:Tin-plating 1.0㎍m								
		Under plating:Nickel 1.0㎍m								
1	Polyamide	Black UL94V-0		3	Phosphor bronze	Tin-plating 3.0㎍m				
						Under plating:Nickel 1.0㎍m				
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS				
UNITS mm				SCALE 2 : 1	 1	DESCRIPTION OF REVISIONS DIS-F-00006019		DESIGNED AK. IWAHORI	CHECKED HT. YAMAGUCHI	DATE 20200406
 HIROSE ELECTRIC CO., LTD.		APPROVED :HS. OKAWA		20140912		DRAWING NO. EDC3-359160-00				
		CHECED :KN. SHIBUYA		20140912		PART NO. FX30B-3P-7. 62DSA25				
		DESIGNED :DK. AIMOTO		20140912		CODE NO. CL570-3206-4-00				
		DRAWN :DK. AIMOTO		20140912						
						 1				

