


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

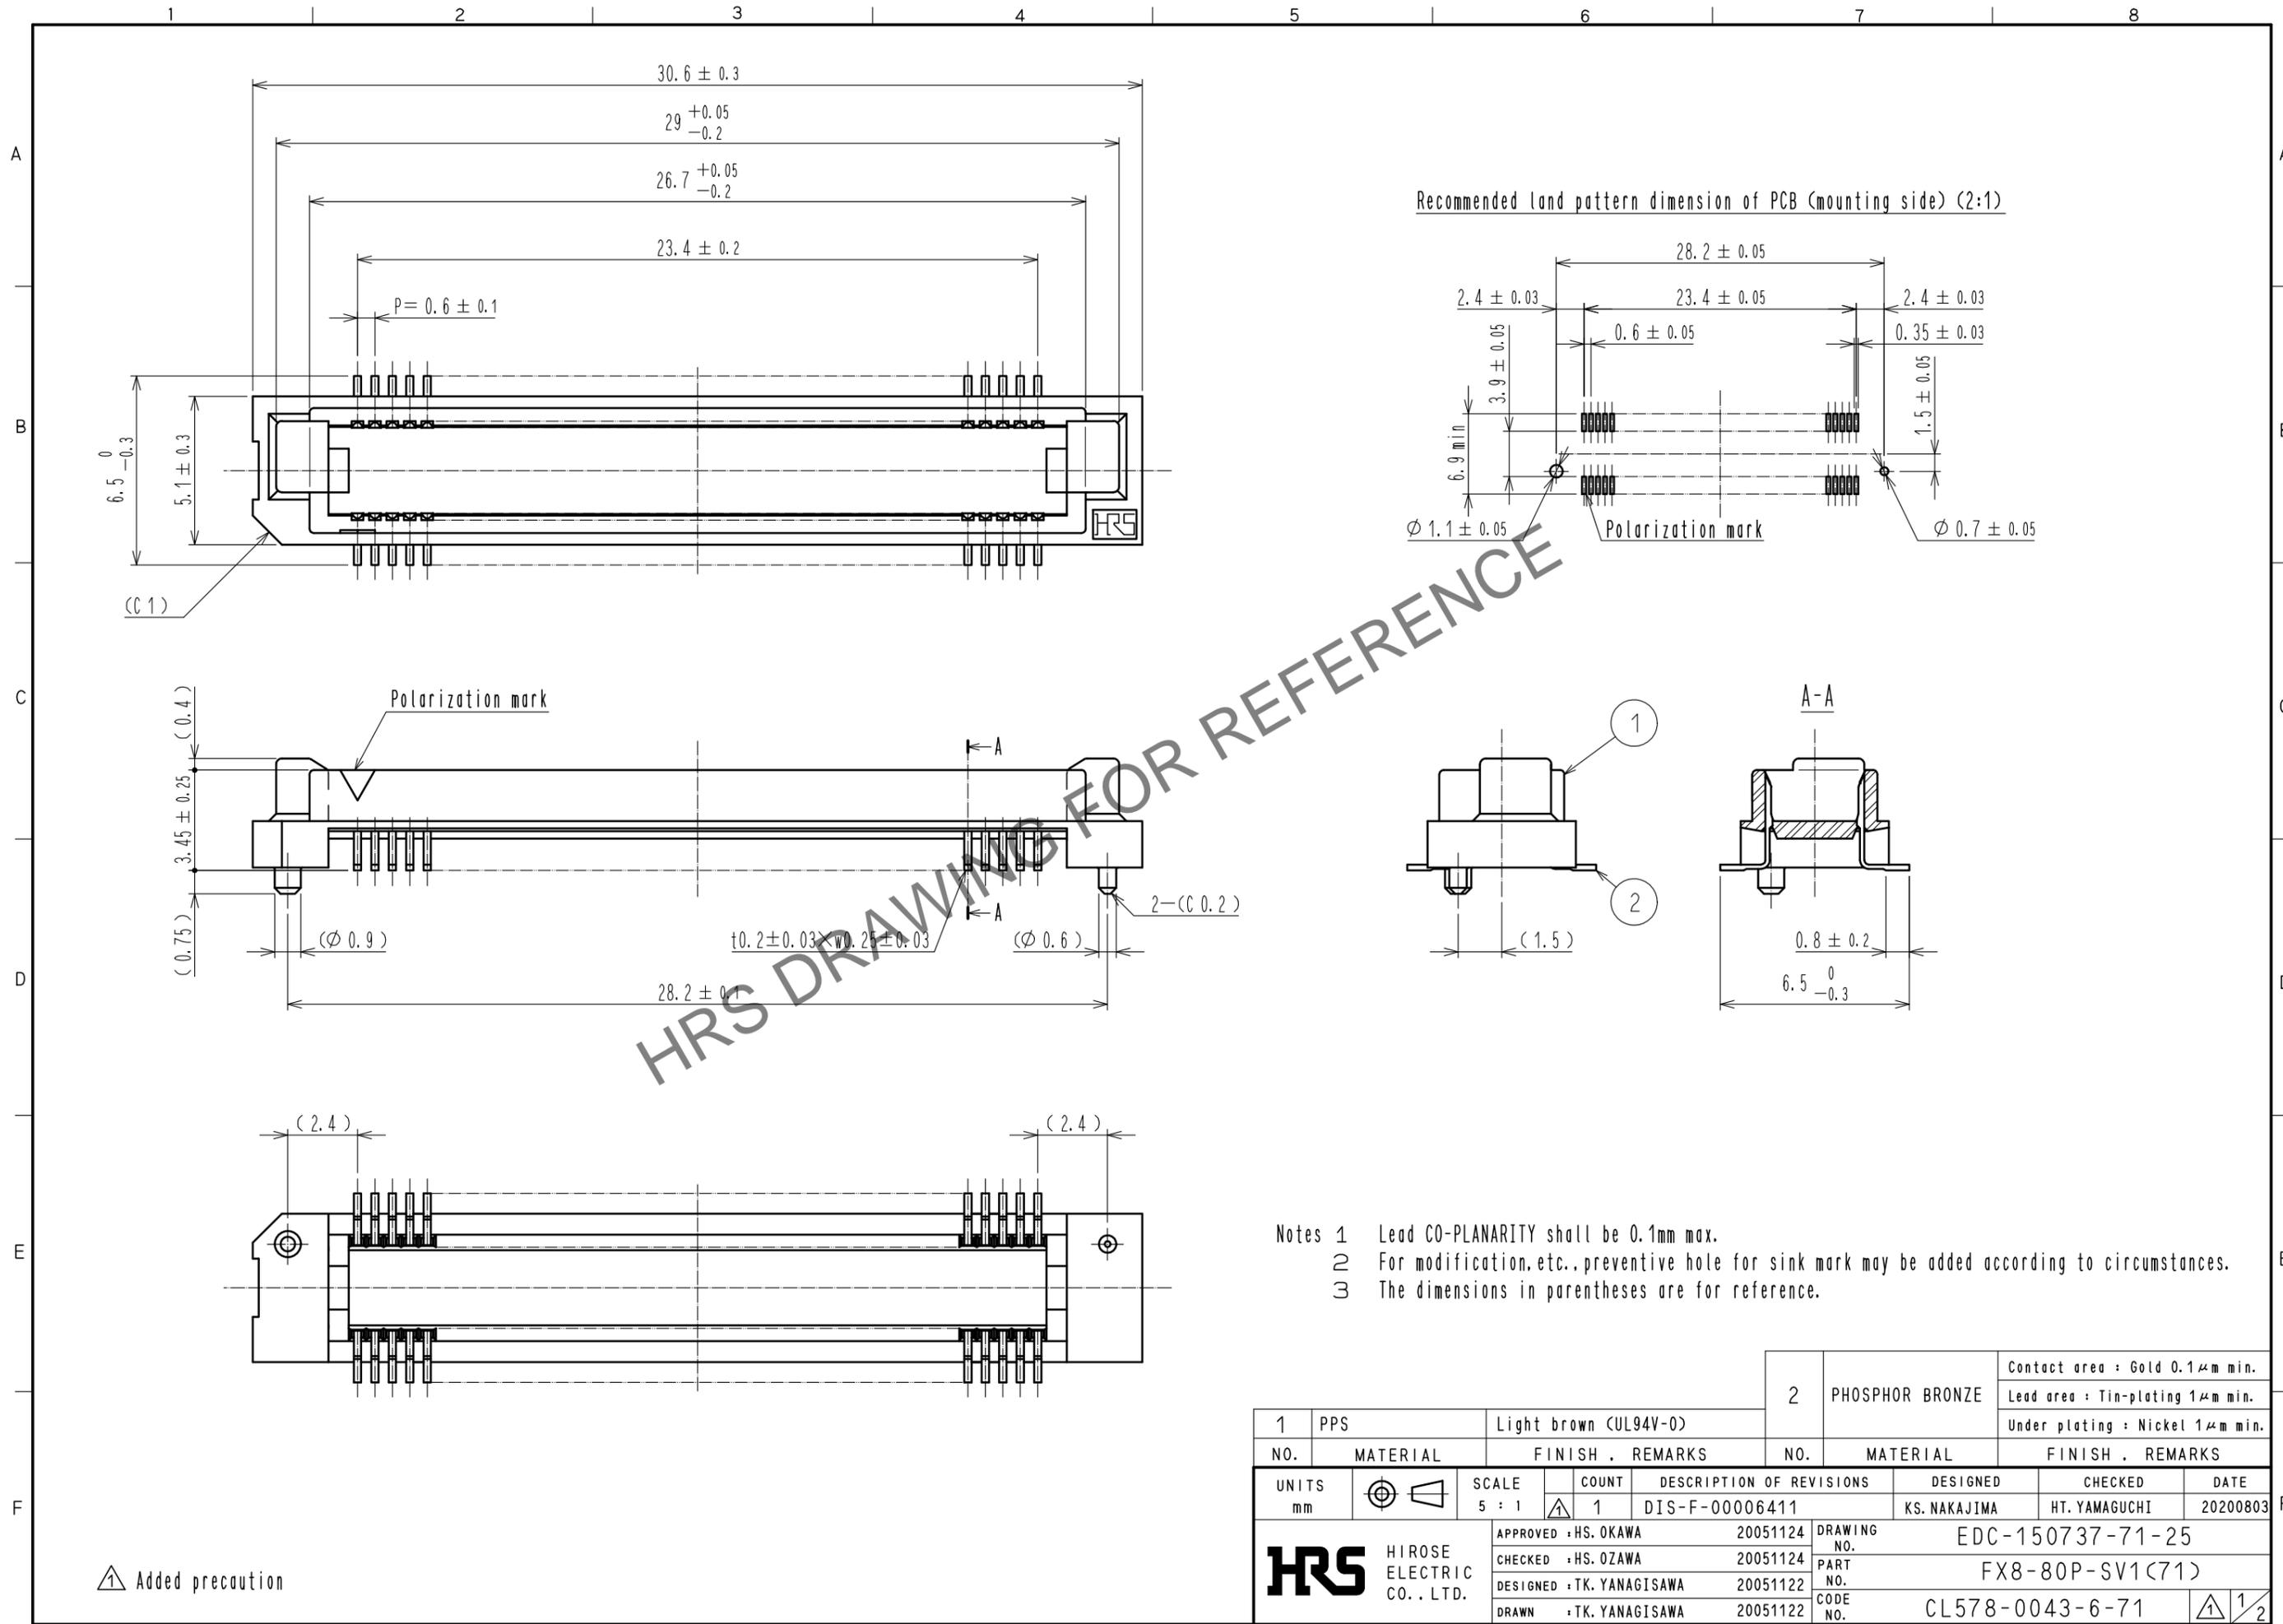

- Notes 1 Lead CO-PLANARITY shall be 0.1mm max.  
 2 For modification, etc., preventive hole for sink mark may be added according to circumstances.  
 3 The dimensions in parentheses are for reference.

1 PPS		Light brown (UL94V-0)		2 PHOSPHOR BRONZE		Contact area : Gold 0.1µm min.	
NO. MATERIAL		FINISH . REMARKS		NO. MATERIAL		FINISH . REMARKS	
						Lead area : Tin-plating 1µm min.	
						Under plating : Nickel 1µm min.	
UNITS	⊕	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm		5 : 1	1	DIS-F-00006411	KS. NAKAJIMA	HT. YAMAGUCHI	20200803
APPROVED : HS. OKAWA		20051124		DRAWING NO. EDC-150737-71-25			
CHECKED : HS. OZAWA		20051124		PART NO. FX8-80P-SV1(71)			
DESIGNED : TK. YANAGISAWA		20051122		CODE NO. CL578-0043-6-71			
DRAWN : TK. YANAGISAWA		20051122		1/2			


⚠ Added precaution

Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


【 Precaution 】

When a board with multiple connectors mounted is mated, the connector may be damaged or deformed.  
Please divide one side of the board so only one connector is mated per board.

OK

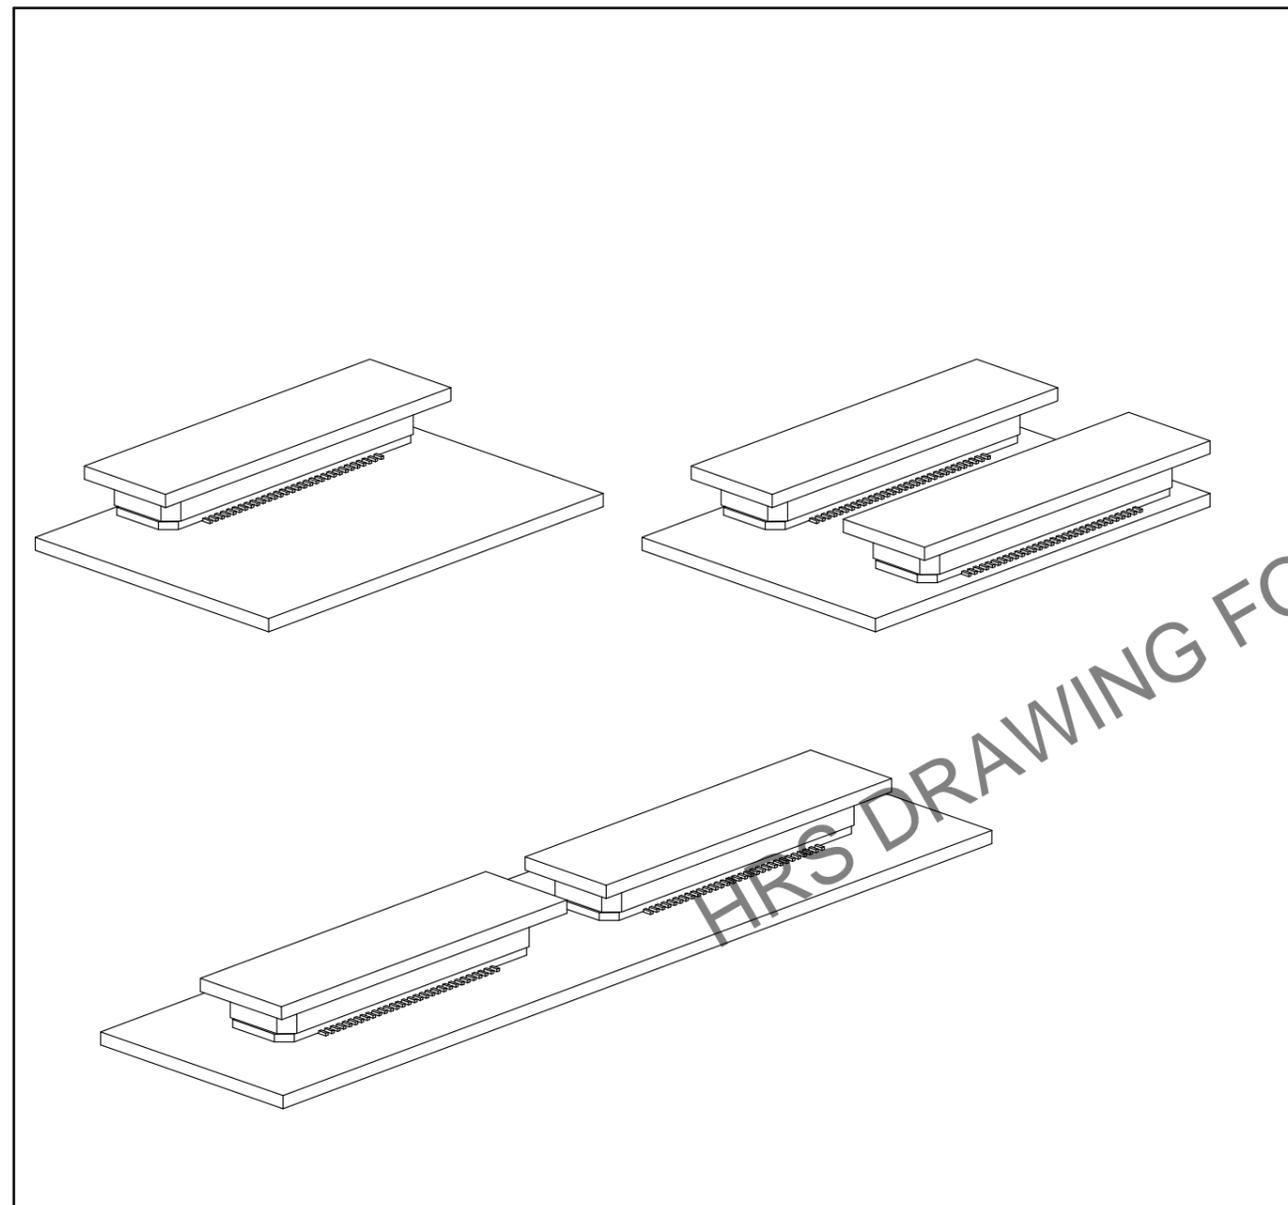

NG

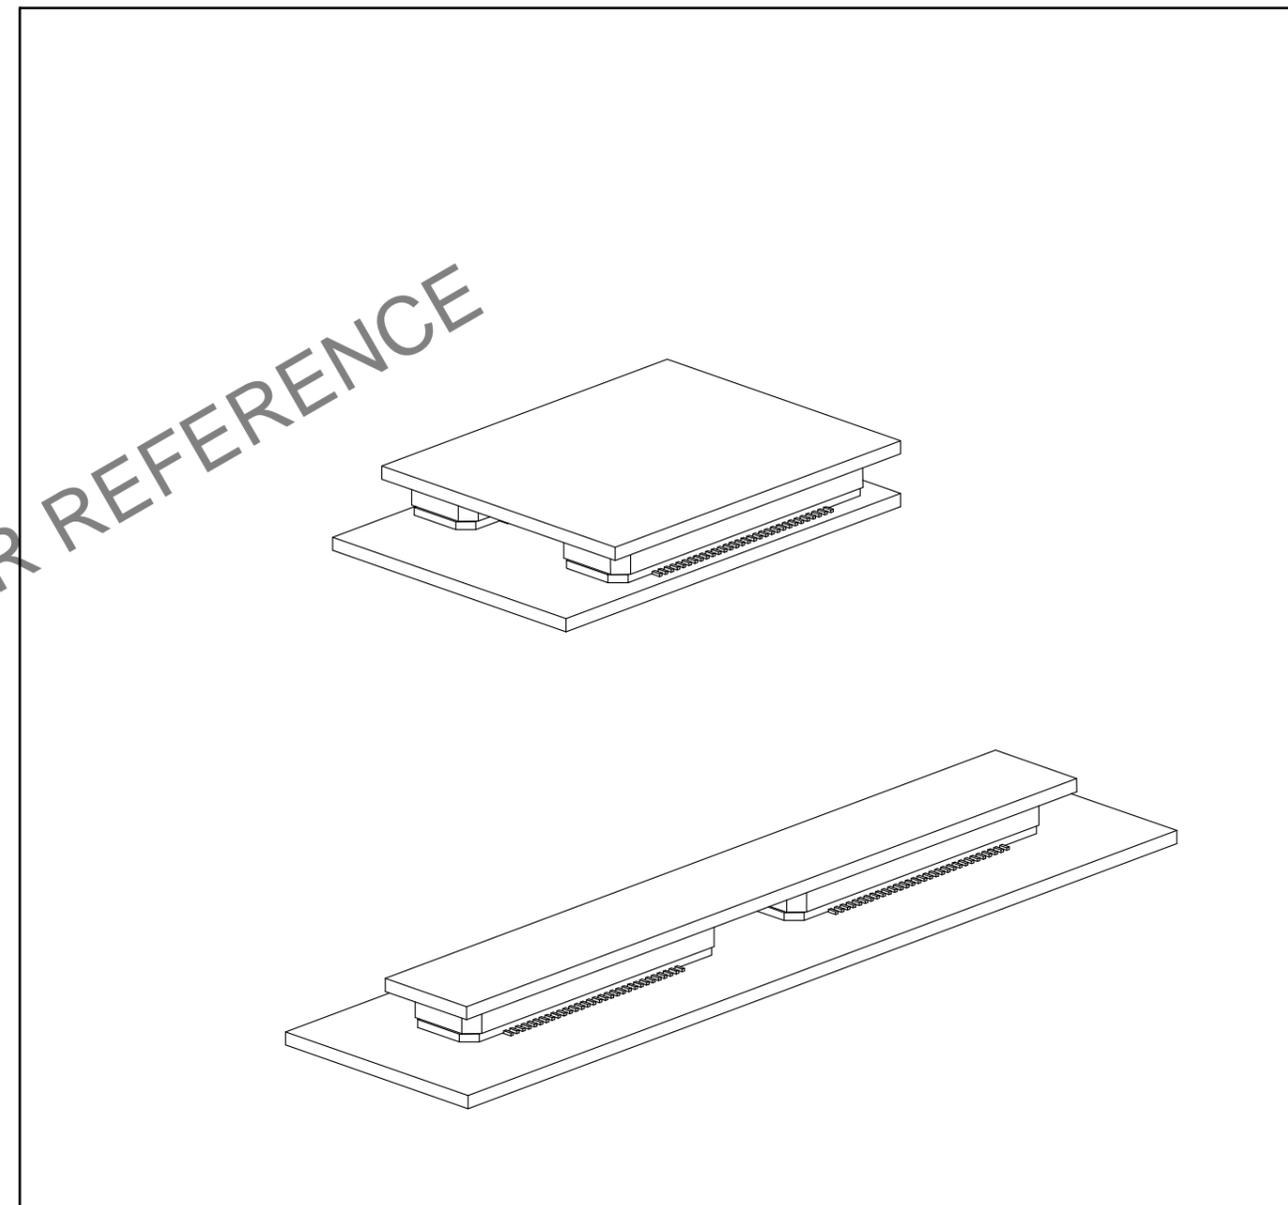

<b>HRS</b>	DRAWING NO.	EDC-150737-71-25
	PART NO.	FX8-80P-SV1(71)
	CODE NO.	CL578-0043-6-71
		2/2