
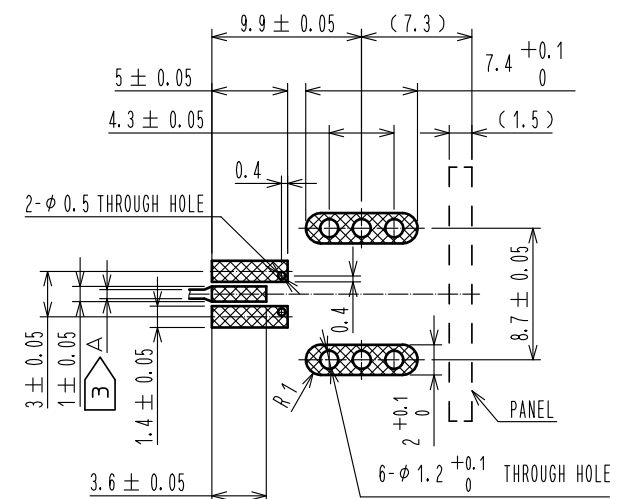
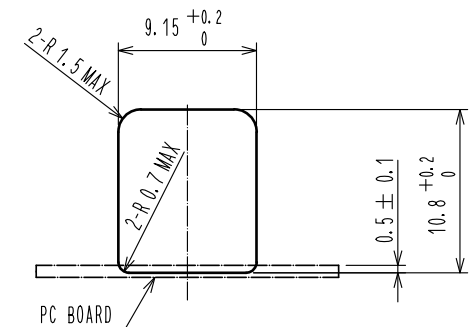
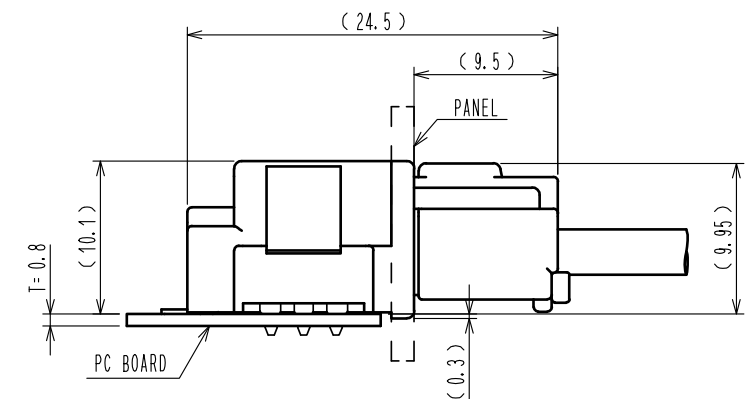
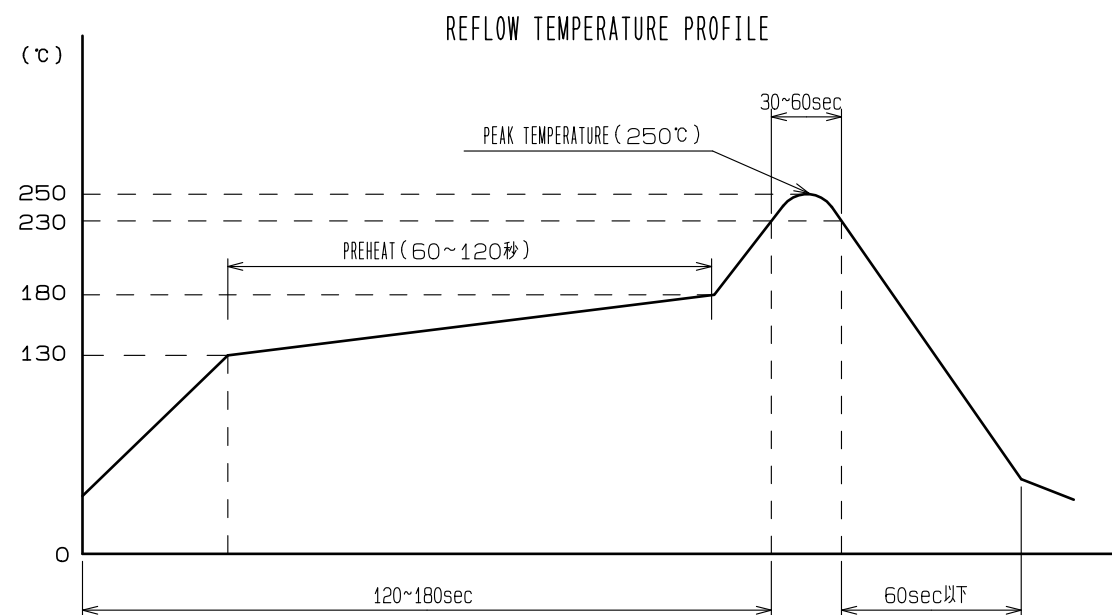


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

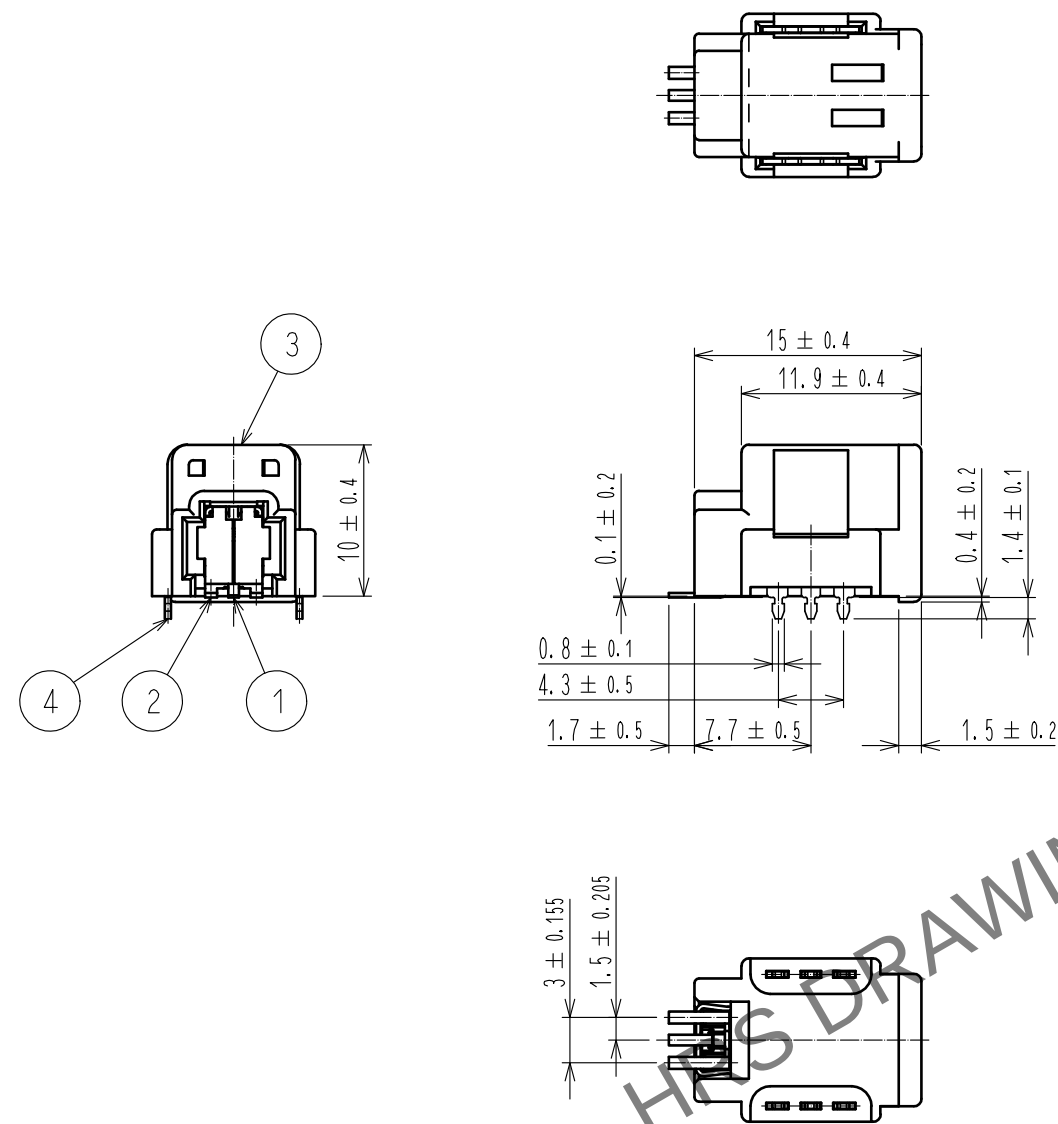

- NOTE 1. LEAD CO-PLANARITY TO BE 0.1mm MAX.
2. REFLOW TEMPERATURE PROFILE IN Fig 1.
3. USE MICRO-STRIPLINE TO BE 50Ω FOR A DIMENSION.



2	COPPER ALLOY	TIN PLATING	4	COPPER ALLOY	TIN PLATING					
1	COPPER ALLOY	TIN PLATING	3	PA	LIGHT GRAY					
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS				
UNITS mm				SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.				APPROVED : KI. HIROKAWA		20200406	DRAWING NO.	EDC-168420-55-00		
				CHECKED : MO. OKADA		20200406	PART NO.	GT21T-1P-H(55)		
				DESIGNED : HK. WATANABE		20200406	CODE NO.	CL771-0014-0-55		
				DRAWN : YK. MITSUISHI		20200403	 1/2			

Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



ELV. RoHS COMPLIANT

PACKAGING SPECIFICATION(4:1)

THE DIRECTION OF PULLING OUT

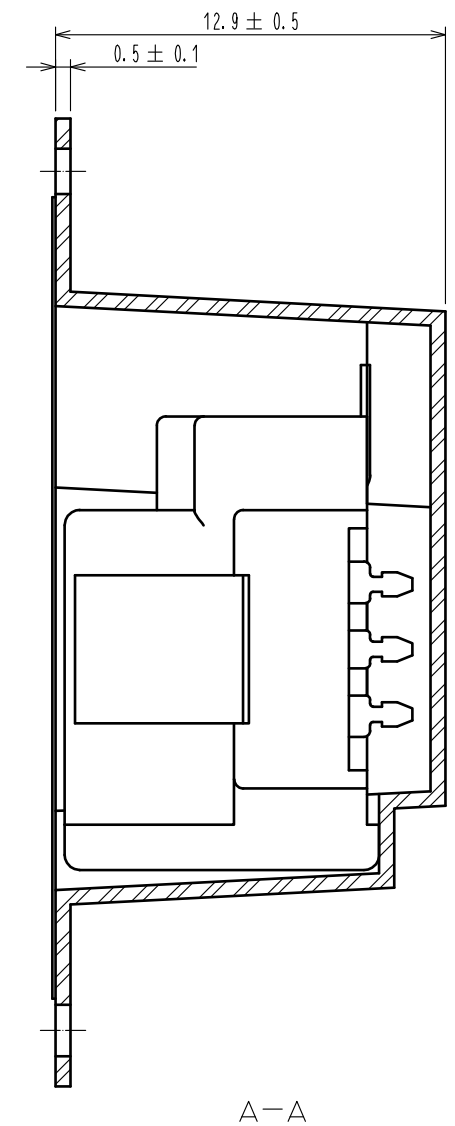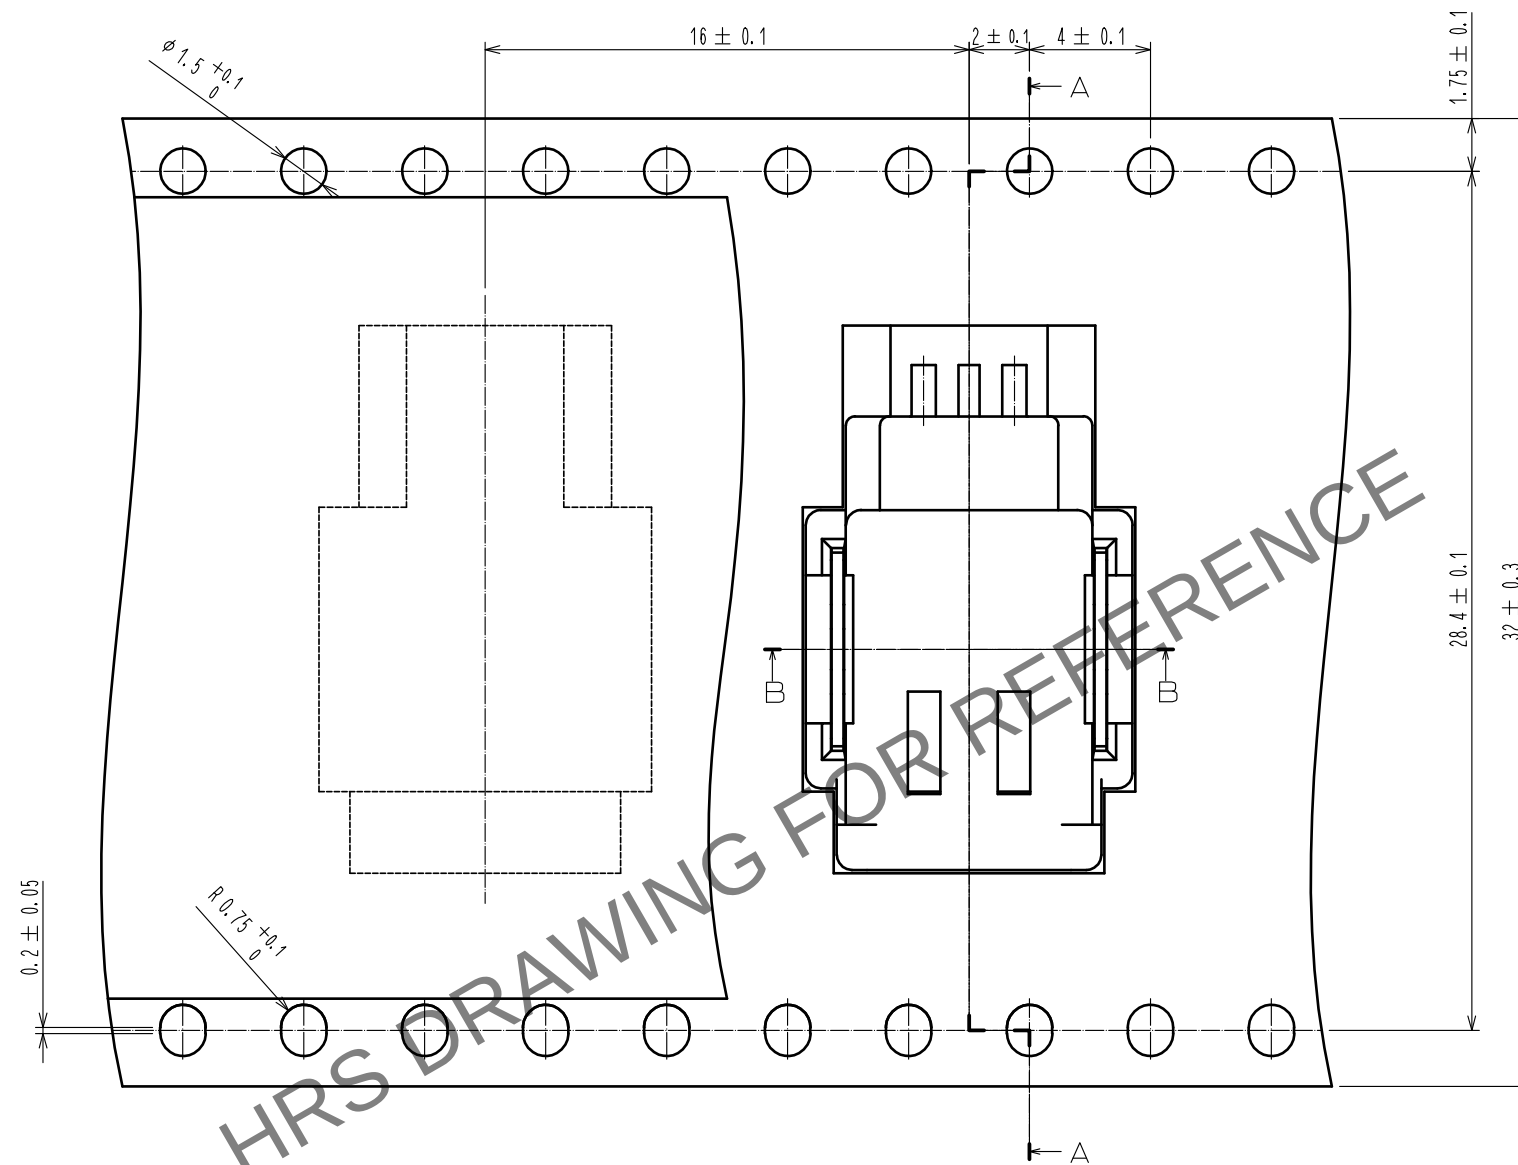

REEL DIMENSIONS(FREE)

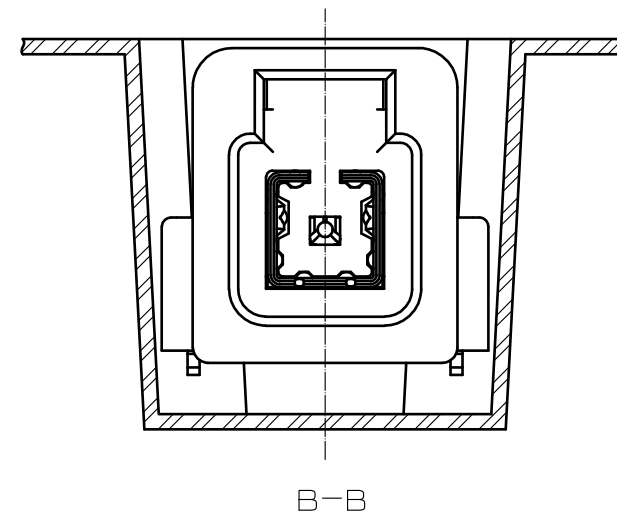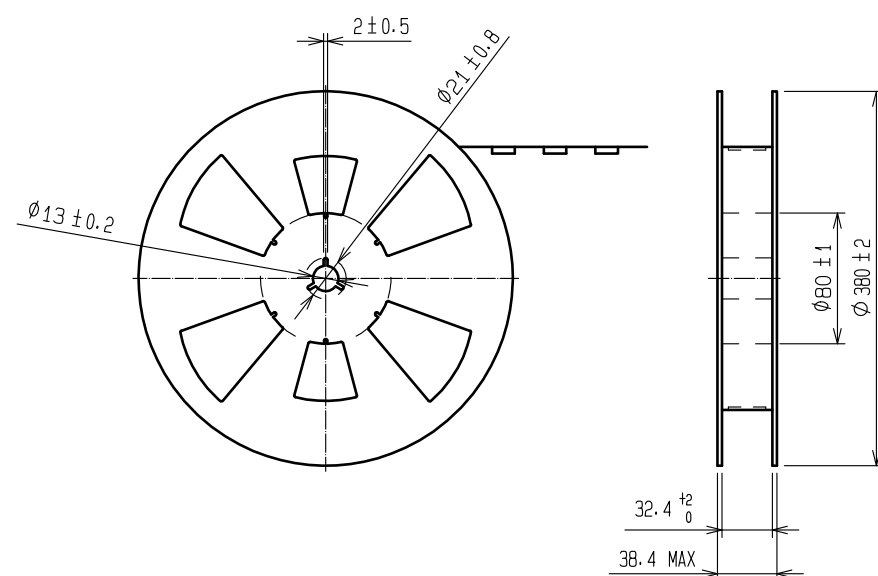

NOTE4. 400 PIECES PER REEL.

HRS

DRAWING NO.	EDC-168420-55-00
PART NO.	GT21T-1P-H(55)
CODE NO.	CL771-0014-0-55

2/2