
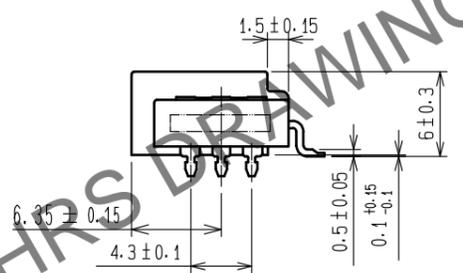
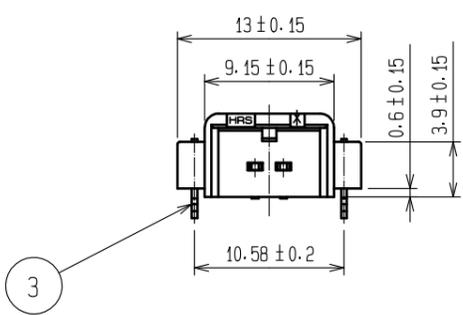
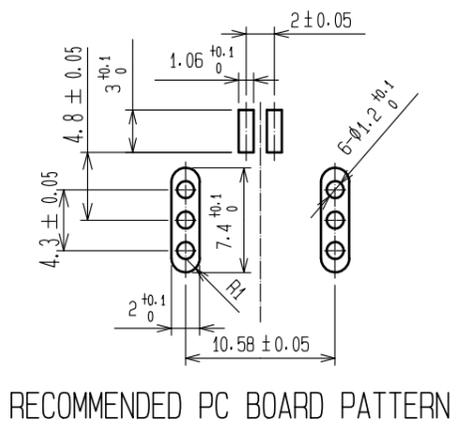
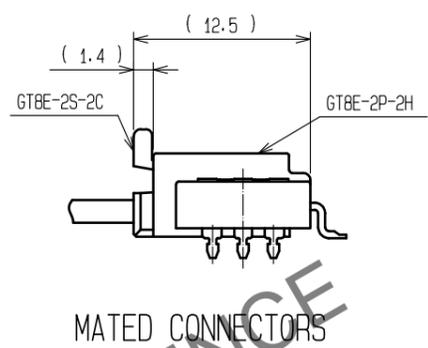




Oct.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

ELV. RoHS COMPLIANT

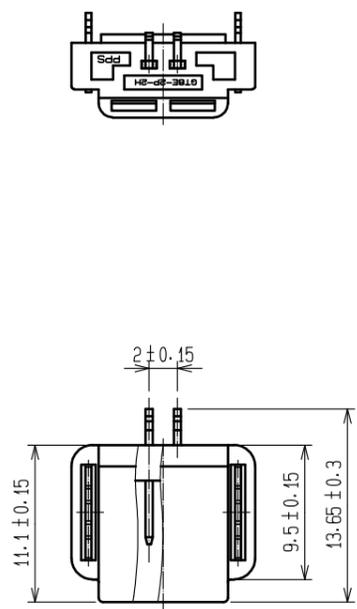

NOTE1. RECOMMENDED TEMPERATURE PROFILE FOR REFLOW
 (REFER TO RIGHT FIG.)
 USED REFLOW SYSTEM
 : IR IN THE AIR OR NITROGEN
 NO. OF CYCLES : 2 MAX
 PEAK : 250°C
 OVER 230°C : 20~40s
 PREHEAT : 150~180°C
 60~120s




2. CO-PLANARITY SHALL BE 0.1 MAX.
 3. MATING HALF: GTBE-2S-2C (CL758-0030-6)

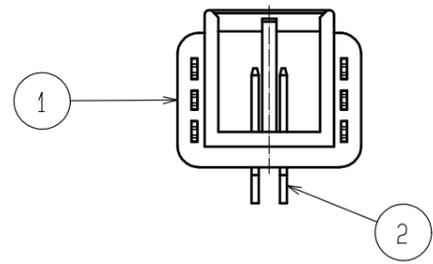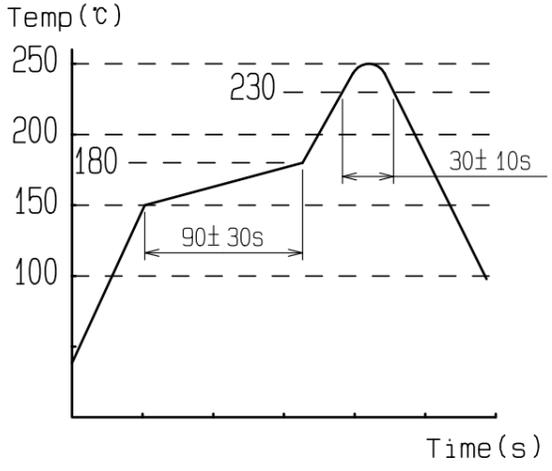


2	BRASS	TIN PLATING	3	BRASS	TIN PLATING
1	PPS	BLACK			
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS	mm	SCALE	2 : 1	COUNT	1
		DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
		DIS-T-00011544	AN. SAIKI	HH. TSUKUMO	20220214
APPROVED : HH. TSUKUMO		20200729	DRAWING NO. EDC-166400-57-00		
CHECKED : HH. TSUKUMO		20200729	PART NO. GT8E-2P-2H(57)		
DESIGNED : DONGCHAN KIM		20200729	CODE NO. CL0758-0032-1-57		
DRAWN : YK. MITSUISHI		20200729	1/2		

Oct.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

ELV. RoHS COMPLIANT

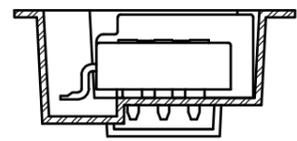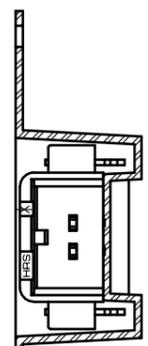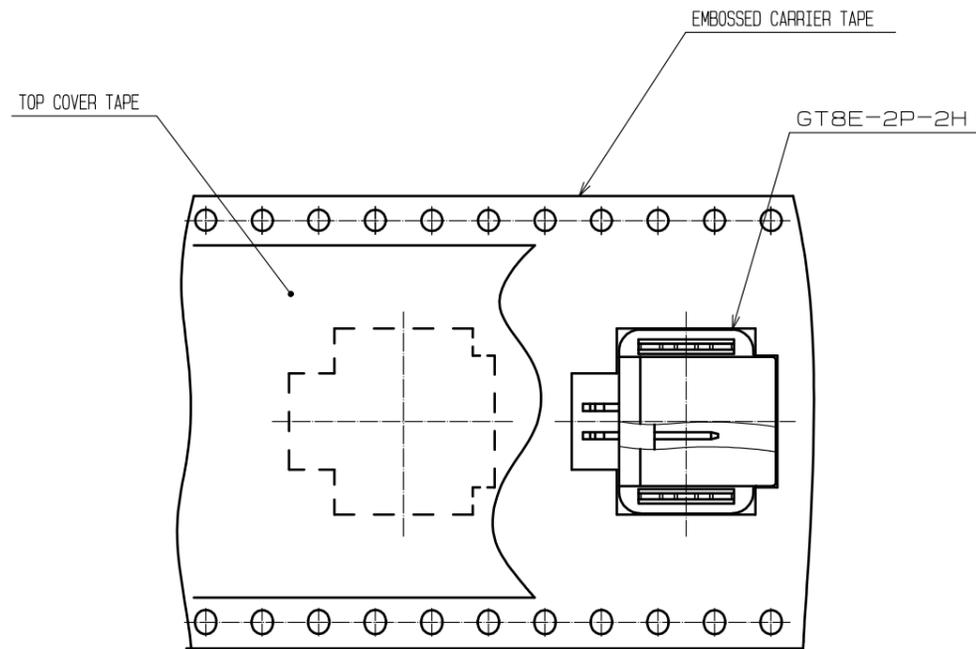

HRS DRAWING FOR REFERENCE

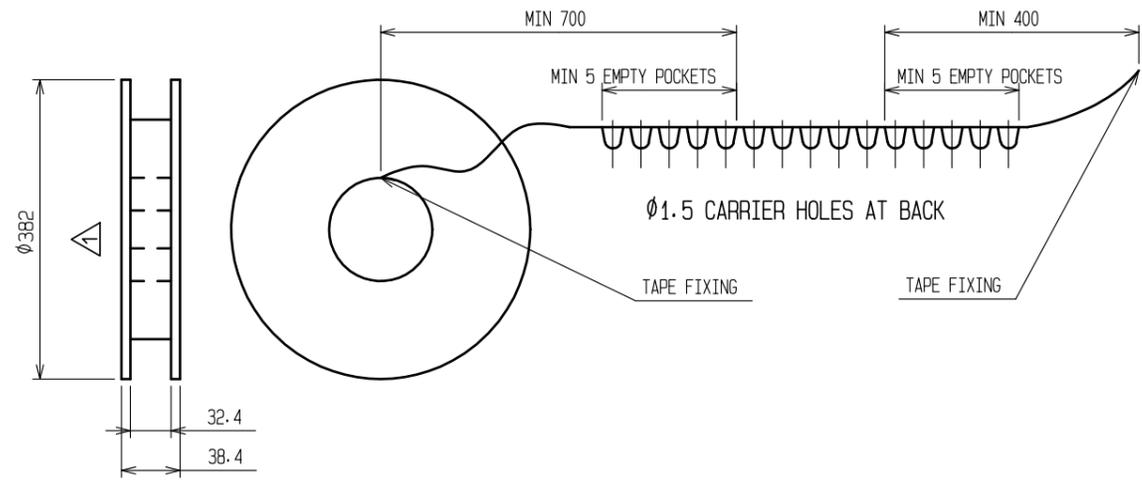

NOTE1. PACKING TYPE:TAPE AND REEL. 500 PCS PER REEL.

HRS	DRAWING NO.	EDC-166400-57-00
	PART NO.	GT8E-2P-2H(57)
	CODE NO.	CL0758-0032-1-57

2/2