
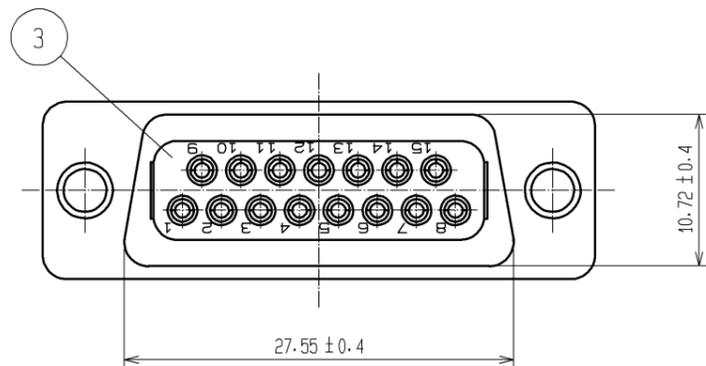
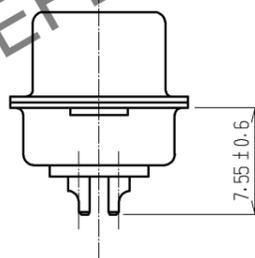
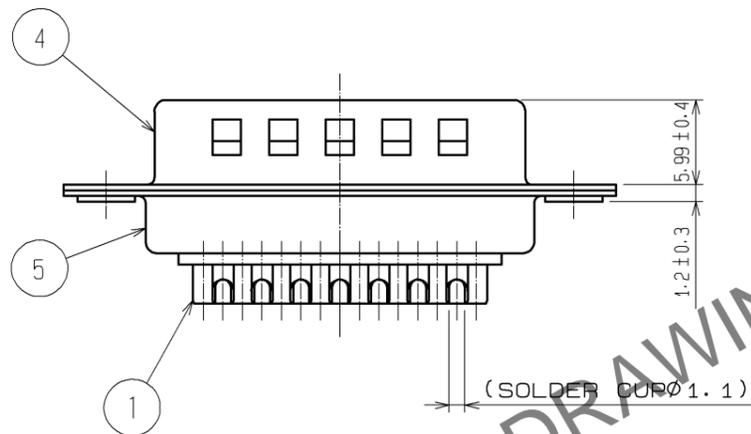
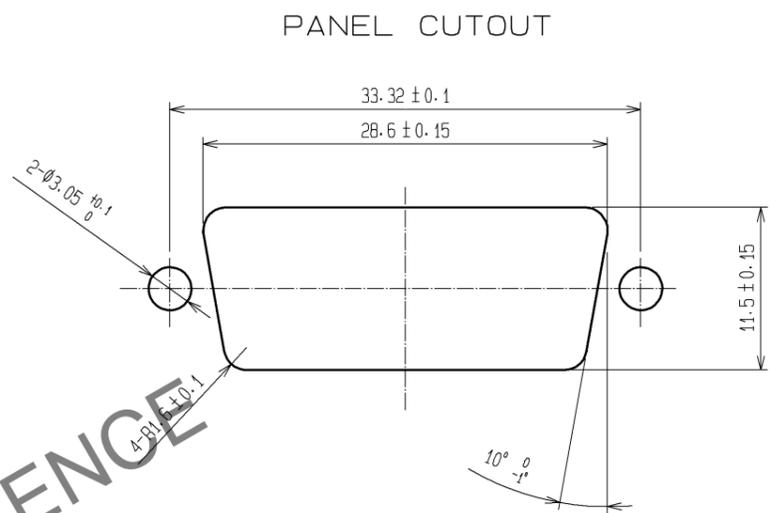


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

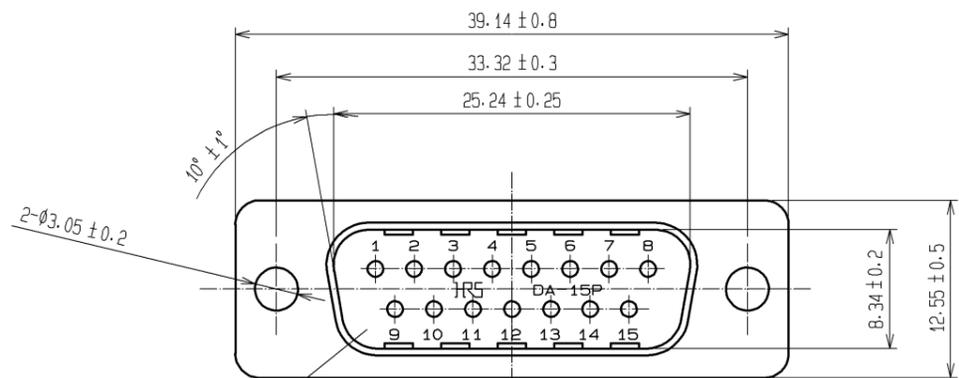

HRS DRAWING FOR REFERENCE

NOTE 1. SOLDERING SHALL BE DONE WITH SOLDERING BIT OF 40W MAX WITHIN 4S.

2 CONTACT AREA: GOLD PLATING 0.2μm MIN  
 TERMINAL AREA: GOLD PLATING 0.03μm MIN  
 UNDER PLATING: NICKEL PLATING 2μm MIN

3	PBT	BLACK UL94V-0	5	STEEL	OVER PLATING : NICKEL 1μm min. UNDER PLATING : COPPER 5μm min.			
2	PBT	BLACK UL94V-0	4	STEEL	OVER PLATING : NICKEL 1μm min. UNDER PLATING : COPPER 5μm min.			
1	PHOSPHOR BRONZE	2						
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS			
UNITS	mm	SCALE	2 : 1	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
<b>HRS</b> HIROSE ELECTRIC CO., LTD.		APPROVED : RI. TAKAYASU	12.10.17	DRAWING NO. EDC3-022423-01				
		CHECKED : EJ. WAKATSUKI	12.10.17	PART NO. HDAB-15PF(C05)				
		DESIGNED : MO. SHIMOYAMA	12.10.17	CODE NO. CL211-0563-3-05				
		DRAWN : TY. ITO	12.10.16					