
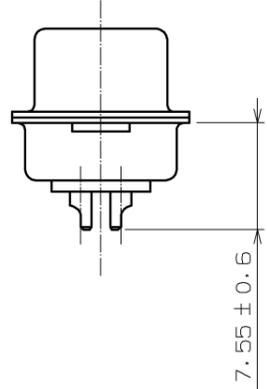
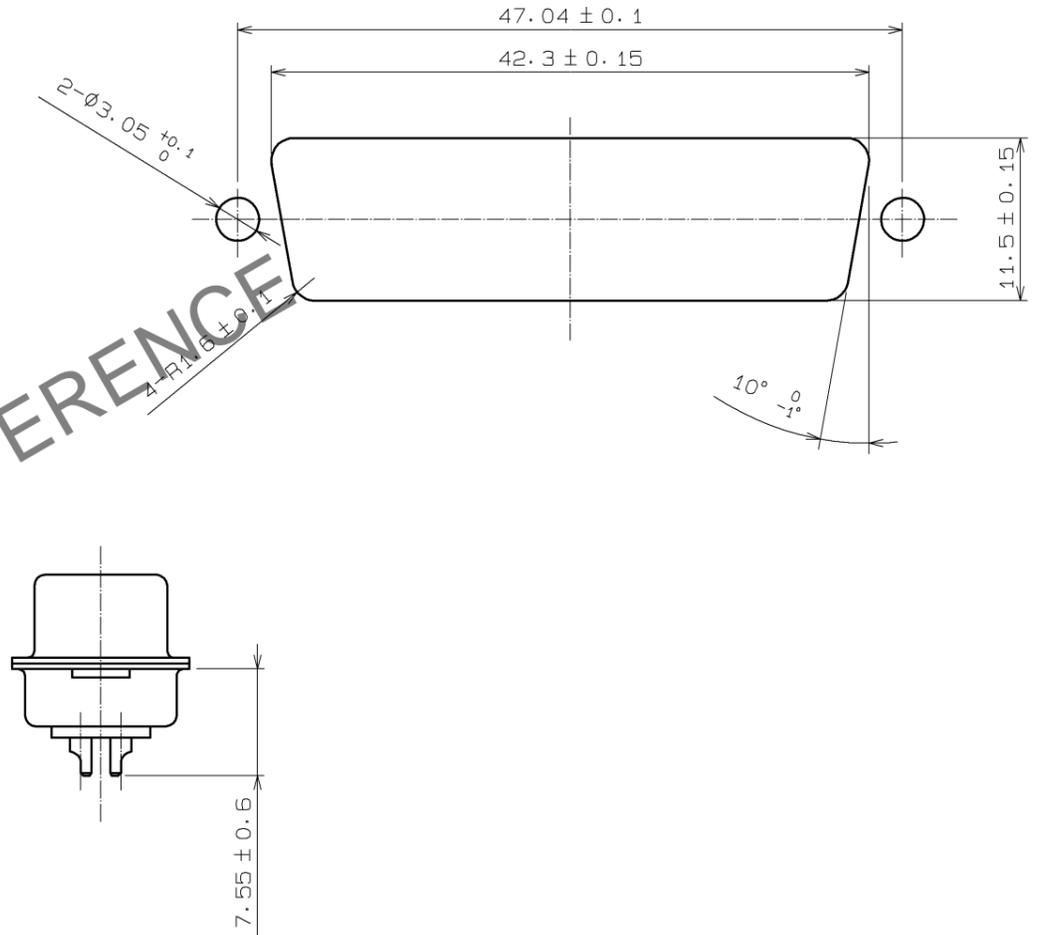
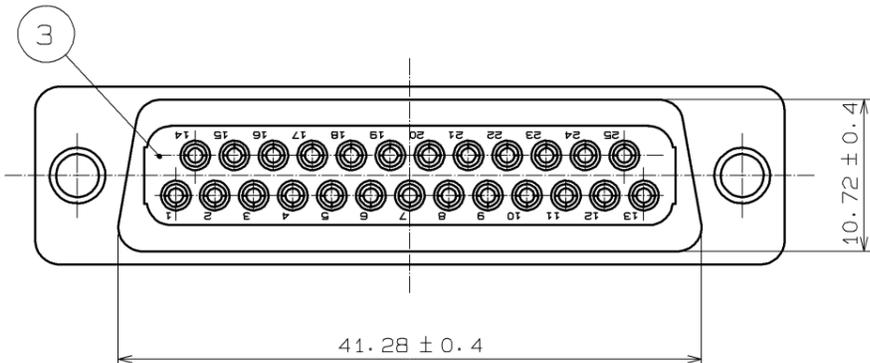
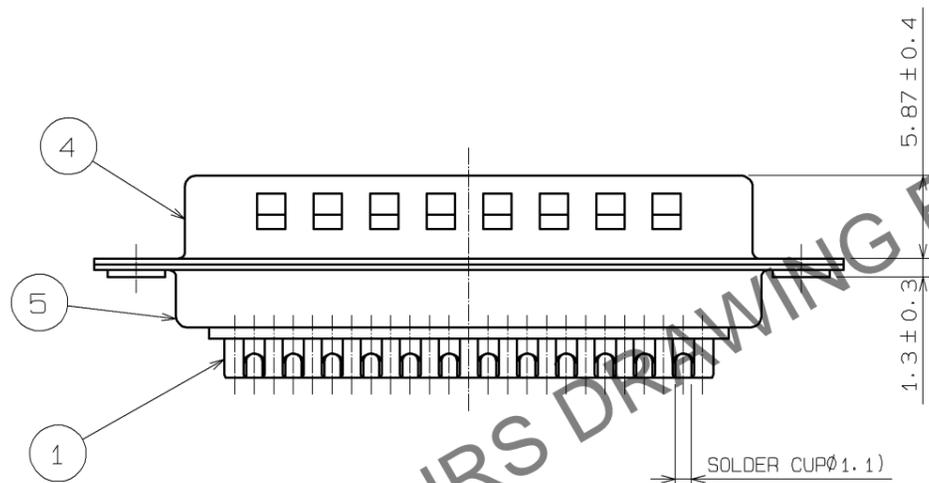


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

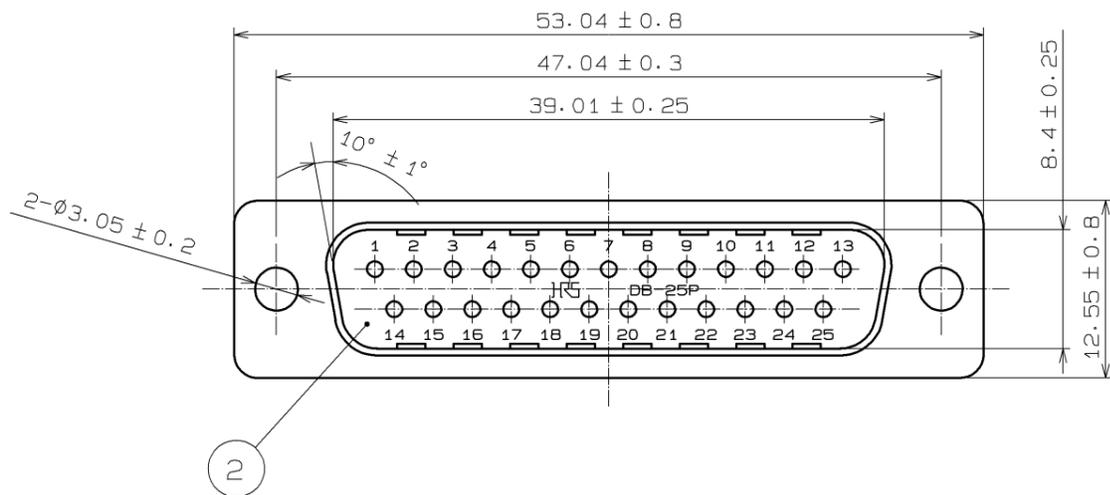

HRS DRAWING FOR REFERENCE

NOTE 1. SOLDERING SHALL BE DOWN WITH SOLDERING BIT OF 40W MAX WITHIN 4s.  
 2 CONTACT AREA: GOLD PLATING 0.2μm MIN  
 TERMINAL AREA: GOLD PLATING 0.03μm MIN  
 UNDER PLATING: NICKEL PLATING 1μm MIN

3	PBT	UL94V-0 BLACK	5	STEEL	SURFACE PLATING : NICKEL 2μm min. UNDER PLATING : COPPER 5μm min.
2	PBT	UL94V-0 BLACK	4	STEEL	SURFACE PLATING : NICKEL 2μm min. UNDER PLATING : COPPER 5μm min.
1	PHOSPHOR BRONZE	2			
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT △	DESCRIPTION OF REVISIONS	
DESIGNED		CHECKED	DATE		
APPROVED : YH. ENAMI		09.01.29	DRAWING NO. EDC3-022424-01		
CHECED : HO. MIWA		09.01.29	PART NO. HDBB-25PF (05)		
DESIGNED : YH. MAMADA		09.01.28	CODE NO. CL211-0564-6-05		
DRAWN : YH. MAMADA		09.01.28	△ 1/1		