
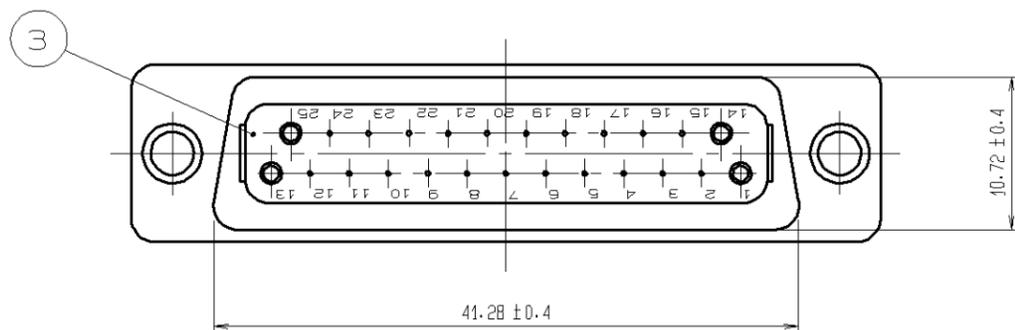
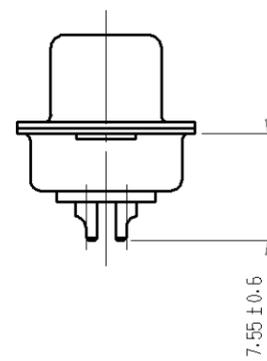
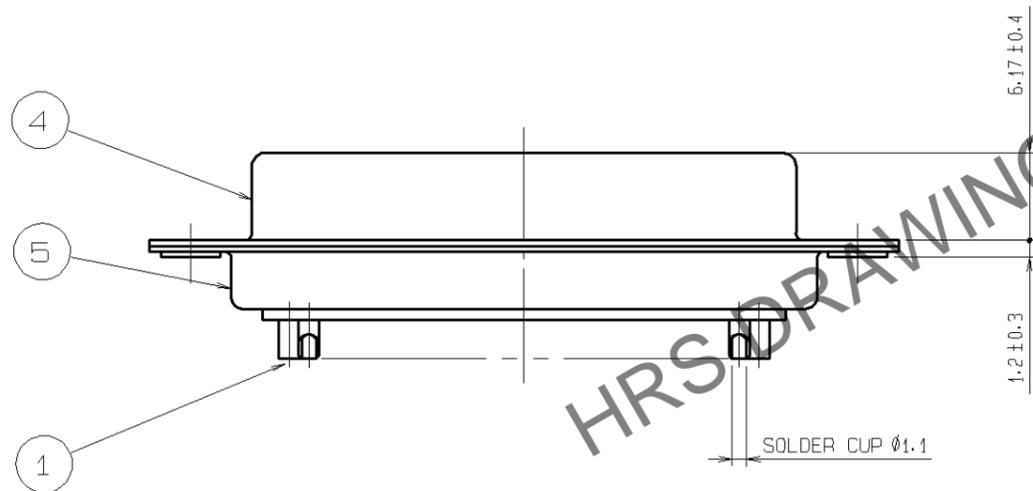
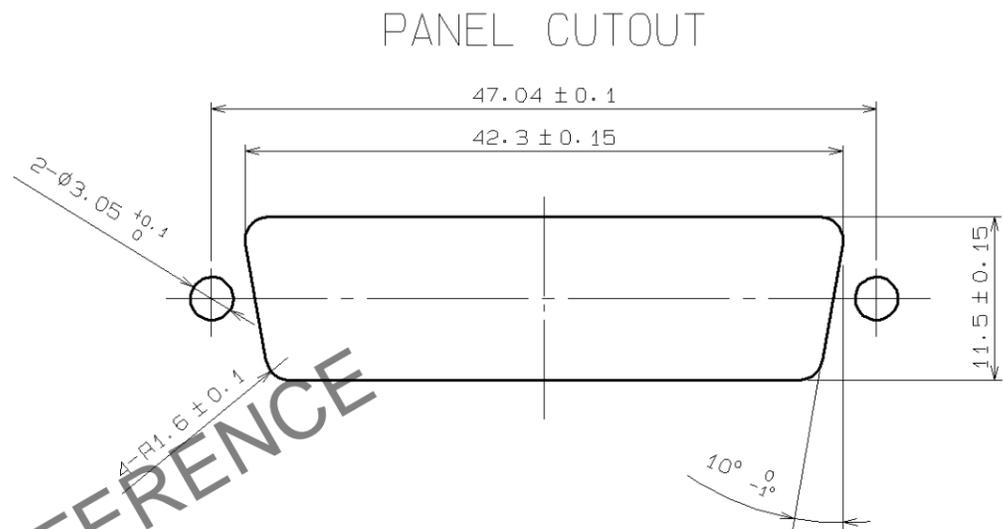


Nov.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

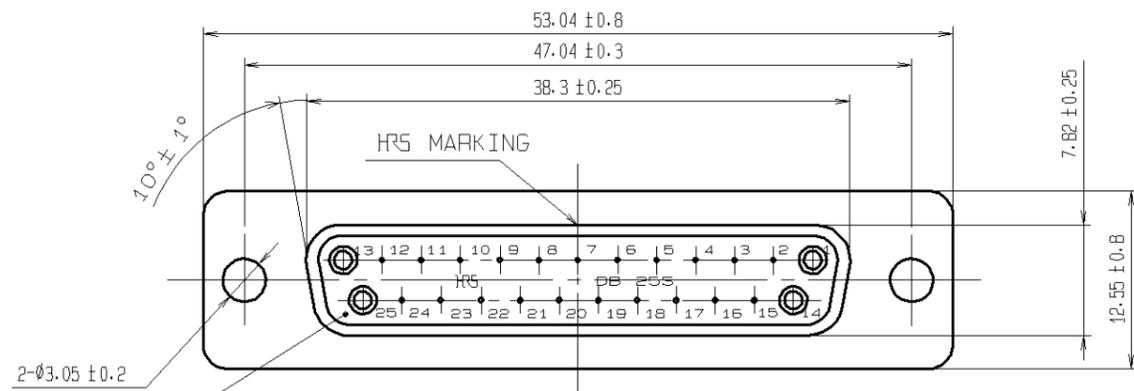

NOTE 1. SOLDERING SHALL BE DOWN WITH SOLDERING BIT OF 40W MAX WITHIN 4s.

- 2 CONTACT AREA: GOLD PLATING 0.2μm MIN
- TERMINAL AREA: GOLD PLATING 0.03μm MIN
- UNDERPLATING: NICKEL PLATING 1μm MIN

3	PBT	UL94V-0 BLACK			
2	PBT	UL94V-0 BLACK	5	STEEL	NICKEL PLATING 2μm
1	PHOSPHOR BRONZE	2	4	STEEL	NICKEL PLATING 2μm
NO.	MATERIAL	FINISH. REMARKS	NO.	MATERIAL	FINISH. REMARKS

UNITS mm		SCALE 2 : 1	COUNT △	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HRS HIROSE ELECTRIC CO., LTD.				APPROVED : HO.MIWA 06.07.26	DRAWING NO. EDC3-009500-03		
				CHECKED : HO.MIWA 06.07.26	PART NO. HDBB-25S(05)		
				DESIGNED : YH.ENAMI 06.07.26	CODE NO. CL211-0216-0-05		
				DRAWN : YH.ENAMI 06.07.26	△ 1/1		