


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

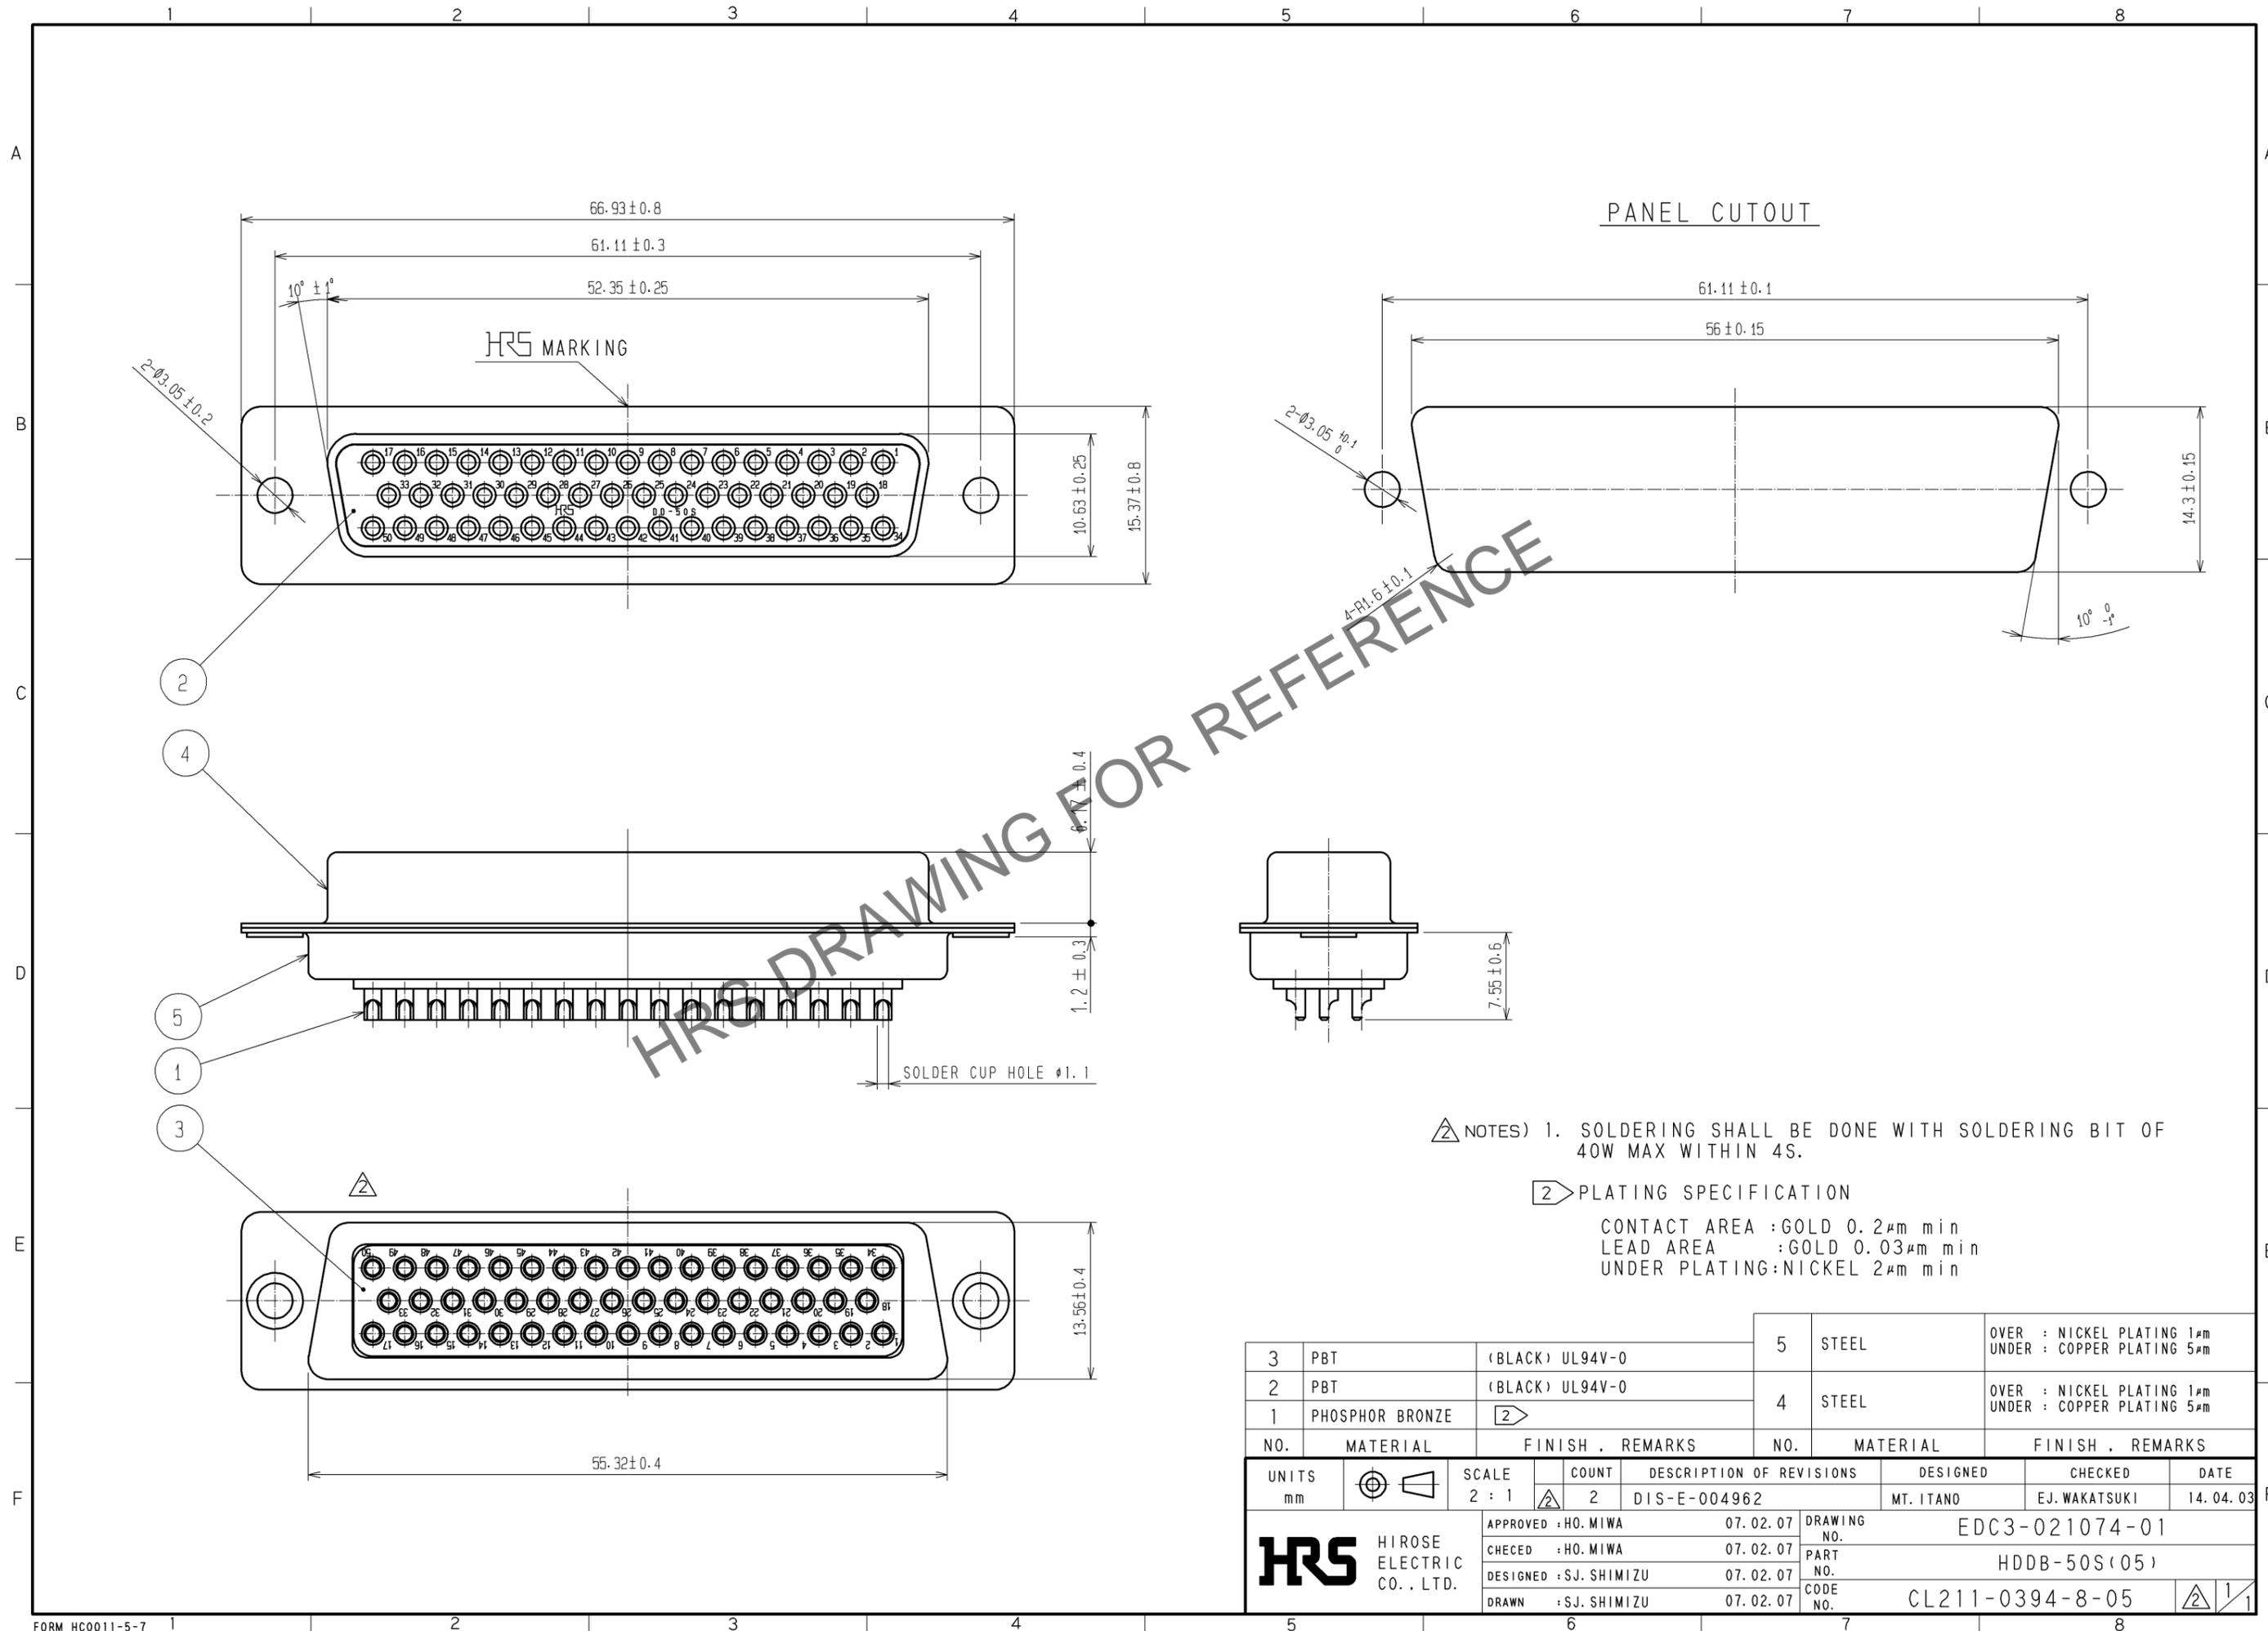

HRS DRAWING FOR REFERENCE

- △ NOTES) 1. SOLDERING SHALL BE DONE WITH SOLDERING BIT OF 40W MAX WITHIN 4S.
- 2 PLATING SPECIFICATION
- CONTACT AREA : GOLD 0.2μm min
 LEAD AREA : GOLD 0.03μm min
 UNDER PLATING : NICKEL 2μm min

NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
3	PBT	(BLACK) UL94V-0	5	STEEL	OVER : NICKEL PLATING 1μm UNDER : COPPER PLATING 5μm
2	PBT	(BLACK) UL94V-0	4	STEEL	OVER : NICKEL PLATING 1μm UNDER : COPPER PLATING 5μm
1	PHOSPHOR BRONZE	2			

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	2	DIS-E-004962	MT. ITANO	EJ. WAKATSUKI	14. 04. 03

APPROVED : HO. MIWA	07. 02. 07	DRAWING NO.	EDC3-021074-01
CHECED : HO. MIWA	07. 02. 07	PART NO.	HDDB-50S(05)
DESIGNED : SJ. SHIMIZU	07. 02. 07	CODE NO.	CL211-0394-8-05
DRAWN : SJ. SHIMIZU	07. 02. 07		