



Oct.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

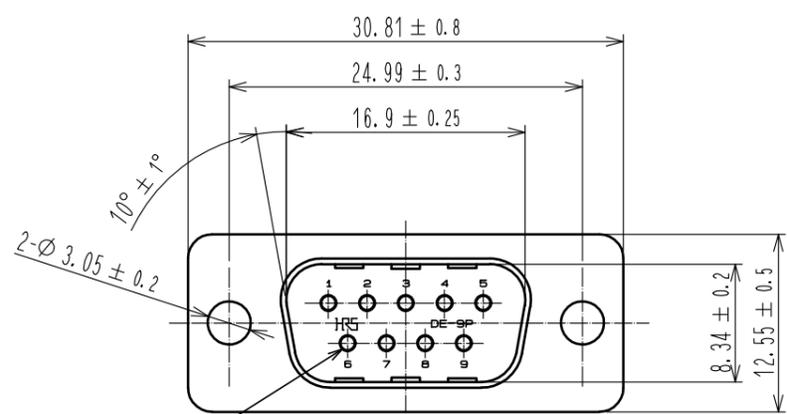

②


Panel cutout(1:1)

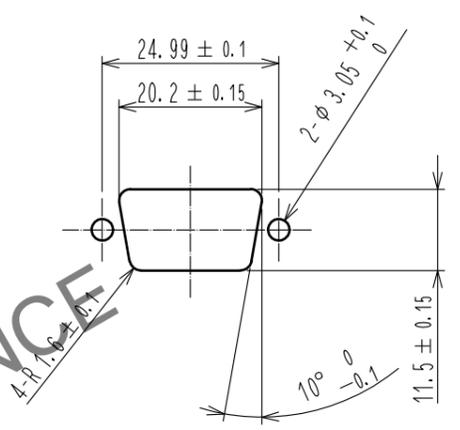


④

⑤

①

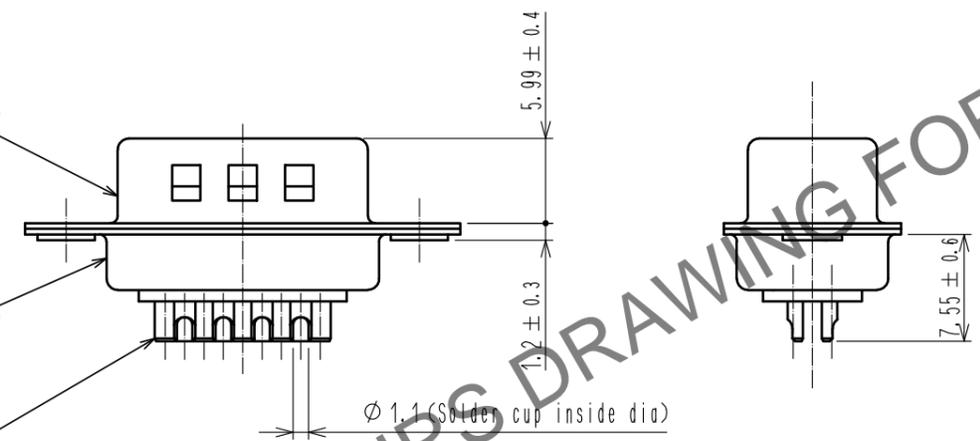

③

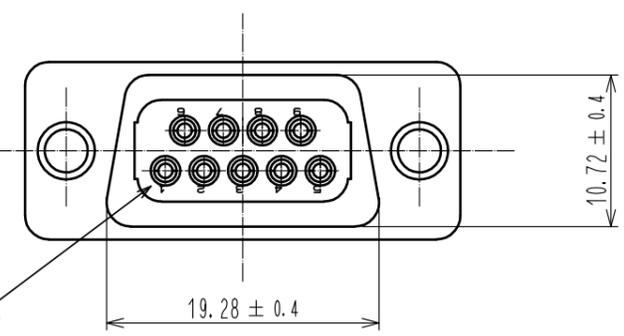

Note 1. Soldering shall be done with 4 sec max and soldering bit of 40W max.

2	PBT	(Black)UL94V-0	5	Steel	Ni Plating			
4	Steel		4	Steel	Ni plating			
1	Copper alloy	Au plating	3	PBT	(Black)UL94V-0			
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS			
UNITS	⊕	SCALE	COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
mm		2 : 1	△					
APPROVED : TU. TANIGUCHI			20230606	DRAWING NO.		EDC-022466-05-00		
CHECKED : TU. TANIGUCHI			20230606	PART NO.		HDEB-9PF(05)		
DESIGNED : KH. OKITA			20230606	CODE NO.		CL0211-0566-1-05		
DRAWN : KH. KOGI			20230606					