
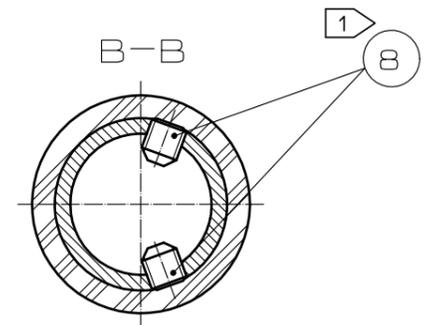
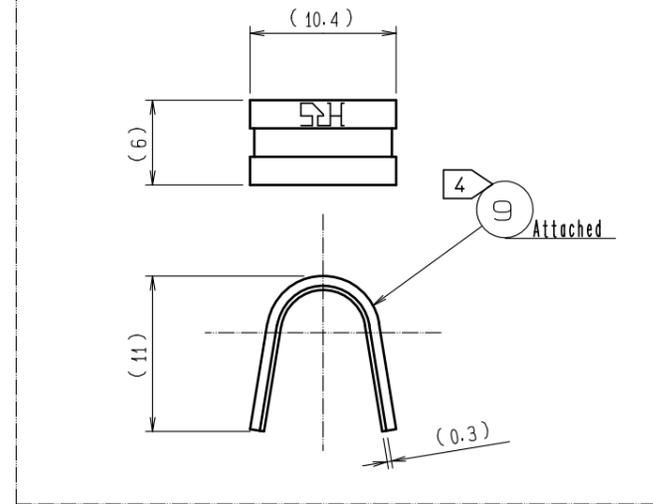


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

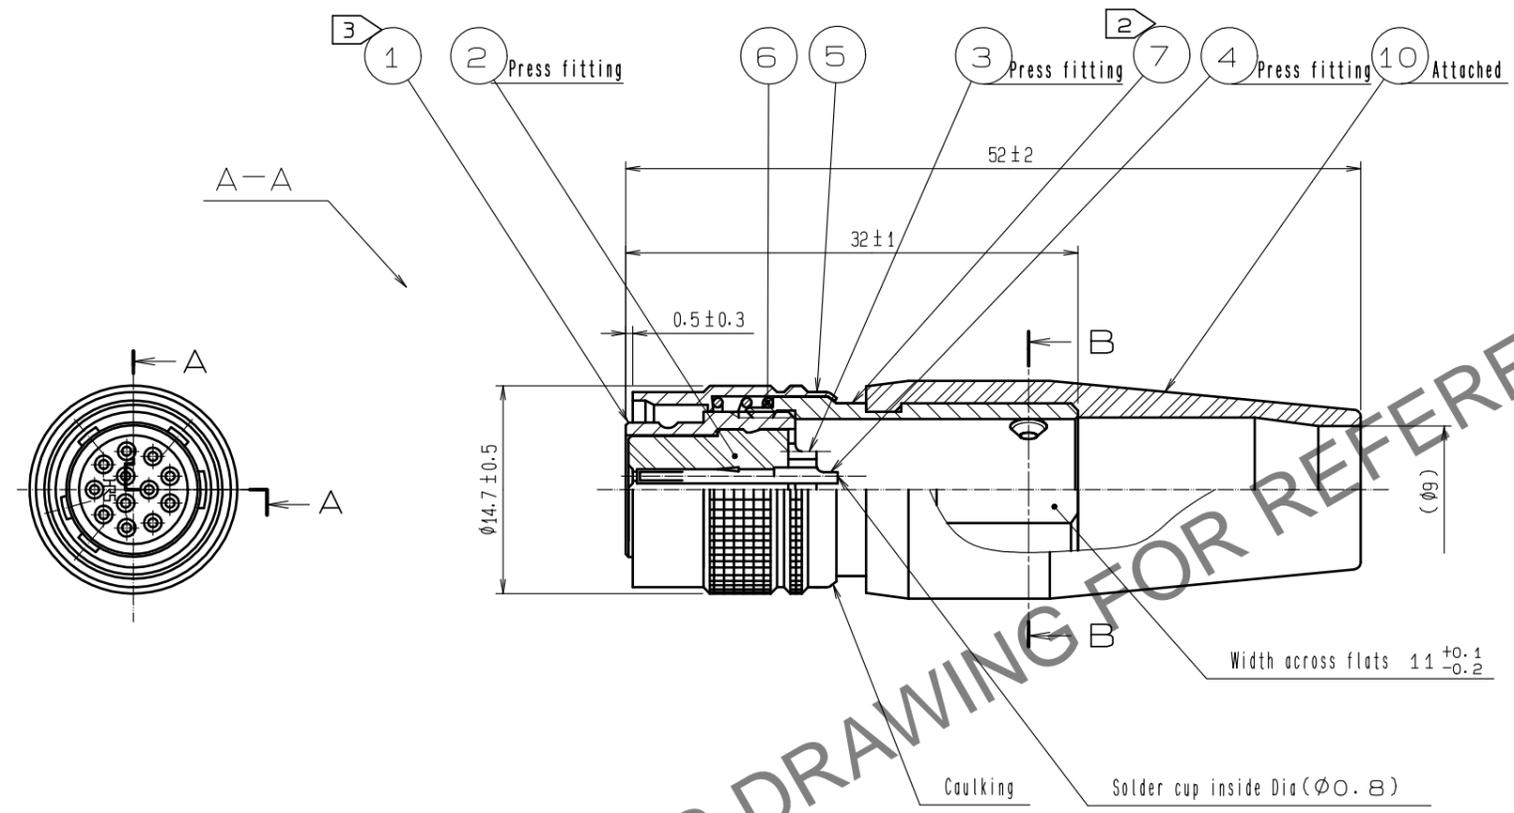

HRS DRAWING FOR REFERENCE

- Notes
- ① Across flats hexagon head of REF. NO. ⑧ : 1.27  
 The concave portion with REF. NO. ⑨ clamped to the cable.  
 The recommended tightening torque, REF. NO. ⑧ : 0.3 to 0.4 N·m.
  - ② The recommended tightening torque, REF. NO. ⑦ : 2 to 2.5 N·m.
  - ③ LOCTITE 263, HENKEL JAPAN or equivalent applies to prevent REF. NO. ⑧ for loosening.
  - ④ Applicable crimping tool of REF. NO. ⑨ : HR10A-TC-03(CCL150-0057-2)
  - 5 One example of the rotation of REF. NO. ⑦ to REF. NO. ① is shown.
  - 6 The cable pull and twisting strength and other characteristics may differ, depending on the cable structure. Please confirm before the use.
  - ⑦ The assembly this product applies to the manual ETAD-C0354-00.

NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
5	Brass	Matte finish nickel plated	10	Chloroprene rubber	(Black)
4	Phosphor bronze	Silver plating 2μm min.	9	Brass	
3	Phosphor bronze	Silver plating 2μm min.	8	Steel	Nickel plating M2.6×0.45×3
2	Polyamide	(Black) UL94V-0	7	Brass	Nickel plating
1	Zinc alloy	Matte finish nickel plated	6	Steel	Nickel plating

UNITS mm		SCALE 2 : 1	COUNT 3	DESCRIPTION OF REVISIONS DIS-C-00016953	DESIGNED HT. ZENBA	CHECKED EJ. KUNII	DATE 20240220
<b>HRS</b> HIROSE ELECTRIC CO., LTD.		APPROVED : EJ. KUNII 20150929	DRAWING NO. EDC-041594-73-73				
		CHECKED : EJ. KUNII 20150929	PART NO. HR10A-10PD-12S(73)				
		DESIGNED : TP. KOMATSU 20150929	CODE NO. CL0110-0449-3-73				
		DRAWN : TP. KOMATSU 20150929			①/1		