


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

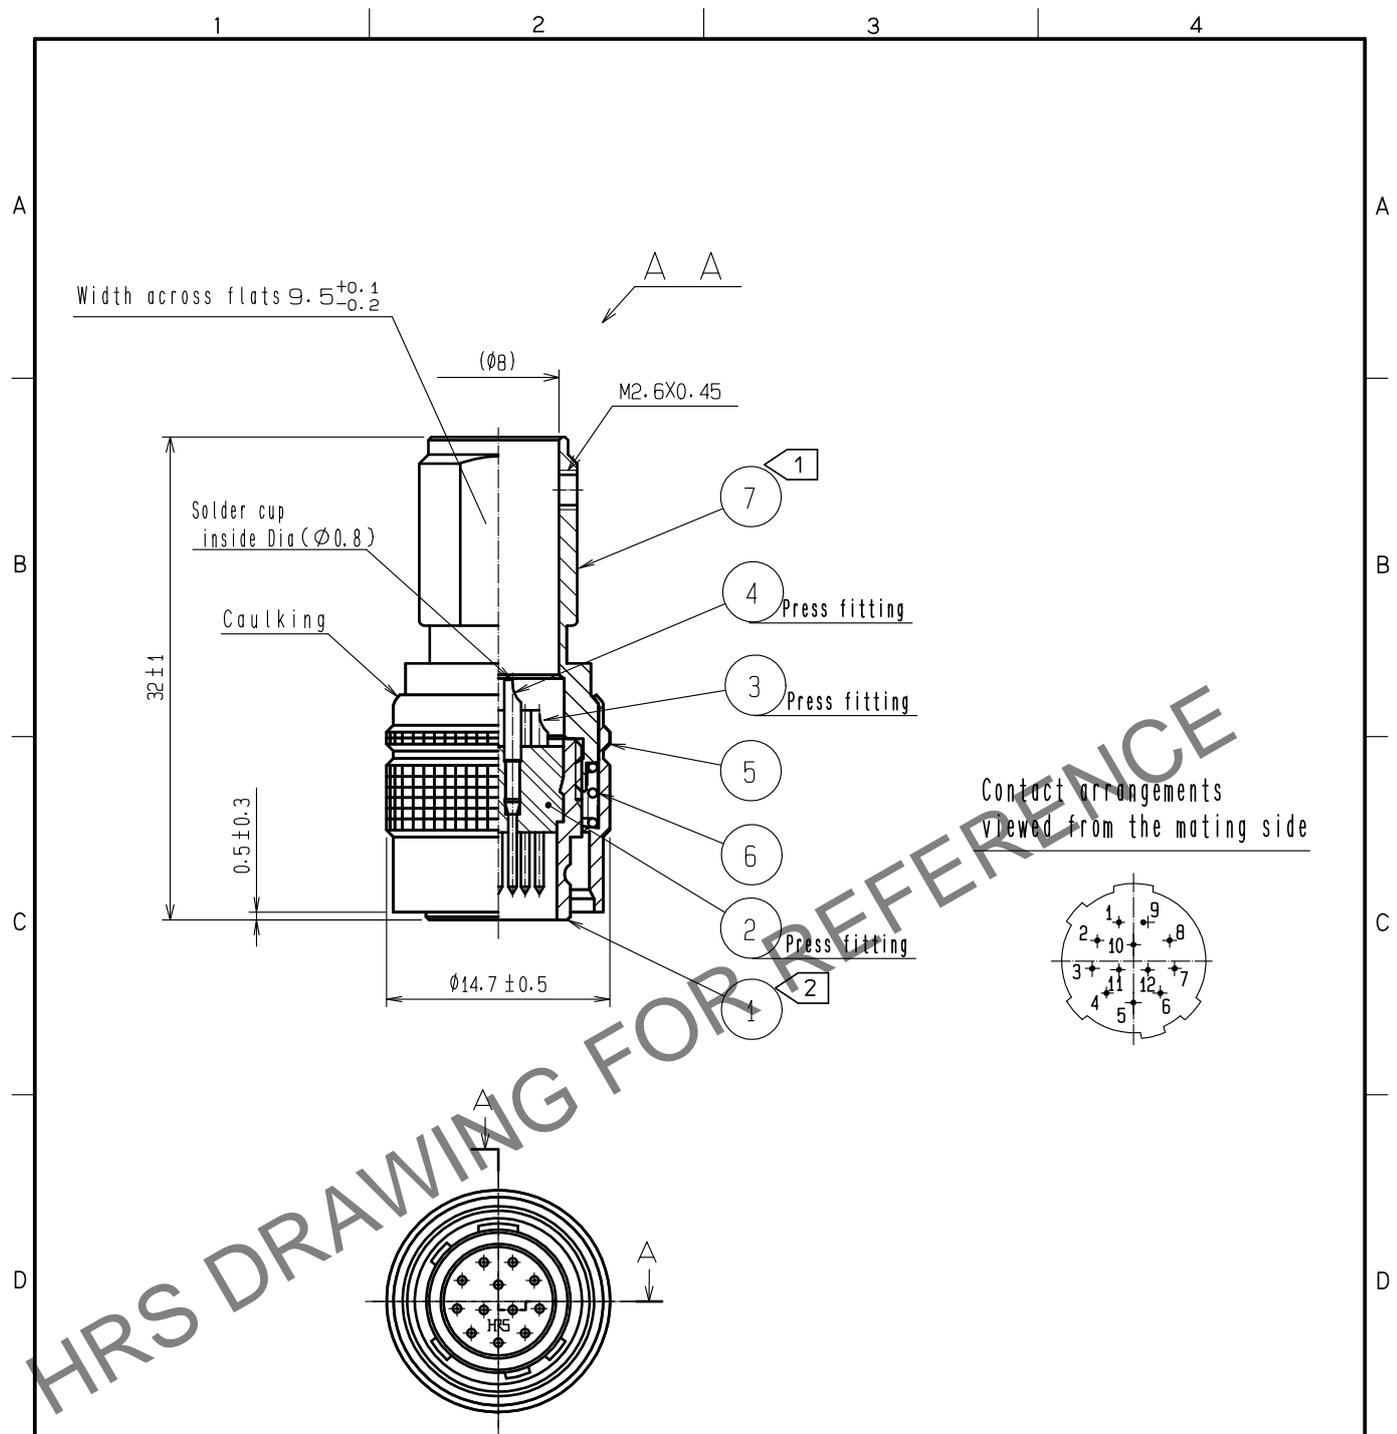

- Notes
- ① The recommended tightening torque, REF. NO. ⑦: 2 to 2.5 N · m.
  - ① ② LOCTITE 263, HENKEL JAPAN or equivalent applies to prevent REF. NO. ① for loosening.
  - ③ One example of the rotation of REF. NO. ⑦ to REF. NO. ① is shown.
  - ① ④ The assembly this product applies to the manual ETAD-C0354-00

NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
4	Brass	Gold plating 0.2μ min.	7	Brass	Nickel plating
3	Brass	Nickel under plating 2μ min.	6	Steel	Nickel plating
2	Polyamide	(Black) UL94V-0	5	Brass	Black Chromate Treatment (Trivalent Chrome)
1	Zinc alloy	Matte finish nickel plated			

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	2	DIS-C-00016953	HT. ZENBA	EJ. KUNII	20240220

<b>HIROSE ELECTRIC CO., LTD.</b>	APPROVED	•EJ. KUNII	20150929	DRAWING NO.	EDC-010386-78-78
	CHECKED	•EJ. KUNII	20150929	PART NO.	HR10A-10P-12P(78)
	DESIGNED	•TP. KOMATSU	20150929	CODE NO.	CL0110-0401-7-78
	DRAWN	•TP. KOMATSU	20150929		