

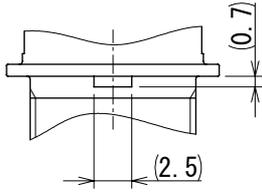
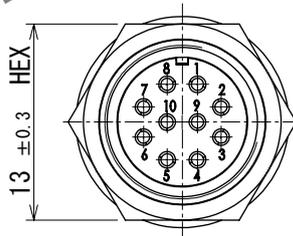


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

A
 Detail of mounting guide

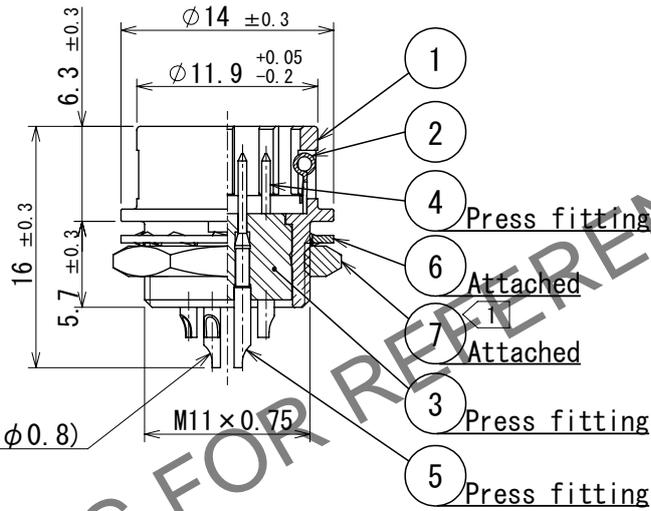

Panel cutout
 (t=0.7 to 2)

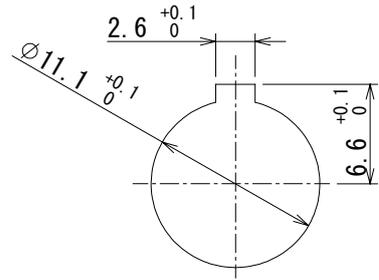

△ Note ① The recommended clamp torque of Ref.No. ⑦ to be 2N · m.
 Loctite 243, Henkel Japan or equivalent apply to prevent Ref.No. ⑦ from loosening.

△ CAD change

NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS
4	Brass	Silver plating	2μm min.	7	Brass	Nickel plating	
3	Polyamide	(Black) UL94V-0		6	Phosphor bronze	Nickel plating	
2	Stainless steel			5	Brass	Silver plating	2μm min.
1	Zinc alloy	Matte finish nickel plated					

		SCALE 2:1	COUNT 2	DESCRIPTION OF REVISIONS DIS-C-00020375	DESIGNED TY. SUZUKI	CHECKED HY. KOBAYASHI	DATE 2025. 07. 16	DRAWING NO. EDC-021369-73-73	PART NO. HR10A-10R-10P (73)	CODE NO. CL0110-0410-8-73	1