

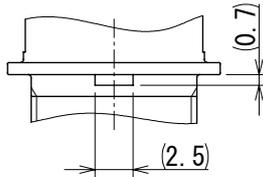


Sep.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

B Detail of mounting guide

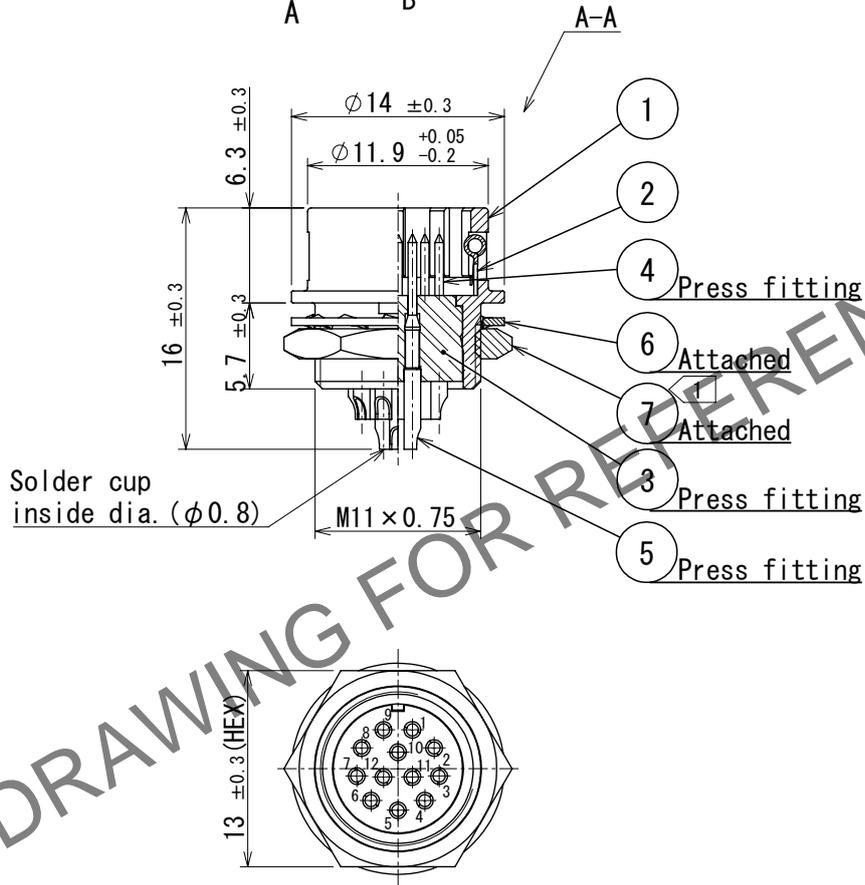

Panel cutout
(t=0.7 to 2)

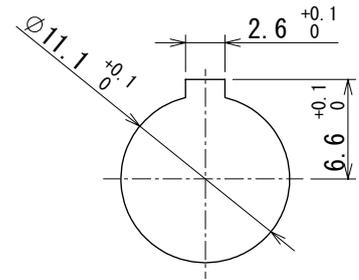

△ Note 1 The recommended clamp torque of Ref. No. ⑦ to be 2N · m.
Loctite 243, Henkel Japan or equivalent apply to prevent Ref. No. ⑦ from loosening.

△ CAD change

4	Brass	Silver plating 2μm min.					
3	Polyamide	(Black) UL94V-0	7	Brass	Nickel plating		
2	Stainless steel		6	Phosphor bronze	Nickel plating		
1	Zinc alloy	Matte finish nickel plated	5	Brass	Silver plating 2μm min.		
NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS

UNITS mm		SCALE 2:1	COUNT 2	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
				DIS-C-00019773		TY. SUZUKI	HY. KOBAYASHI	2025. 04. 25
HIROSE ELECTRIC CO., LTD.		APPROVED : MO. SATOH	2005. 10. 20	DRAWING NO.		EDC-020553-73-73		
		CHECKED : EJ. KUNII	2005. 10. 20	PART NO.		HR10A-10R-12P (73)		
		DESIGNED : DS. MATSUNE	2005. 10. 19	CODE NO.		CL0110-0404-5-73		
		DRAWN : DS. MATSUNE	2005. 10. 19					