


Feb. 1. 2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

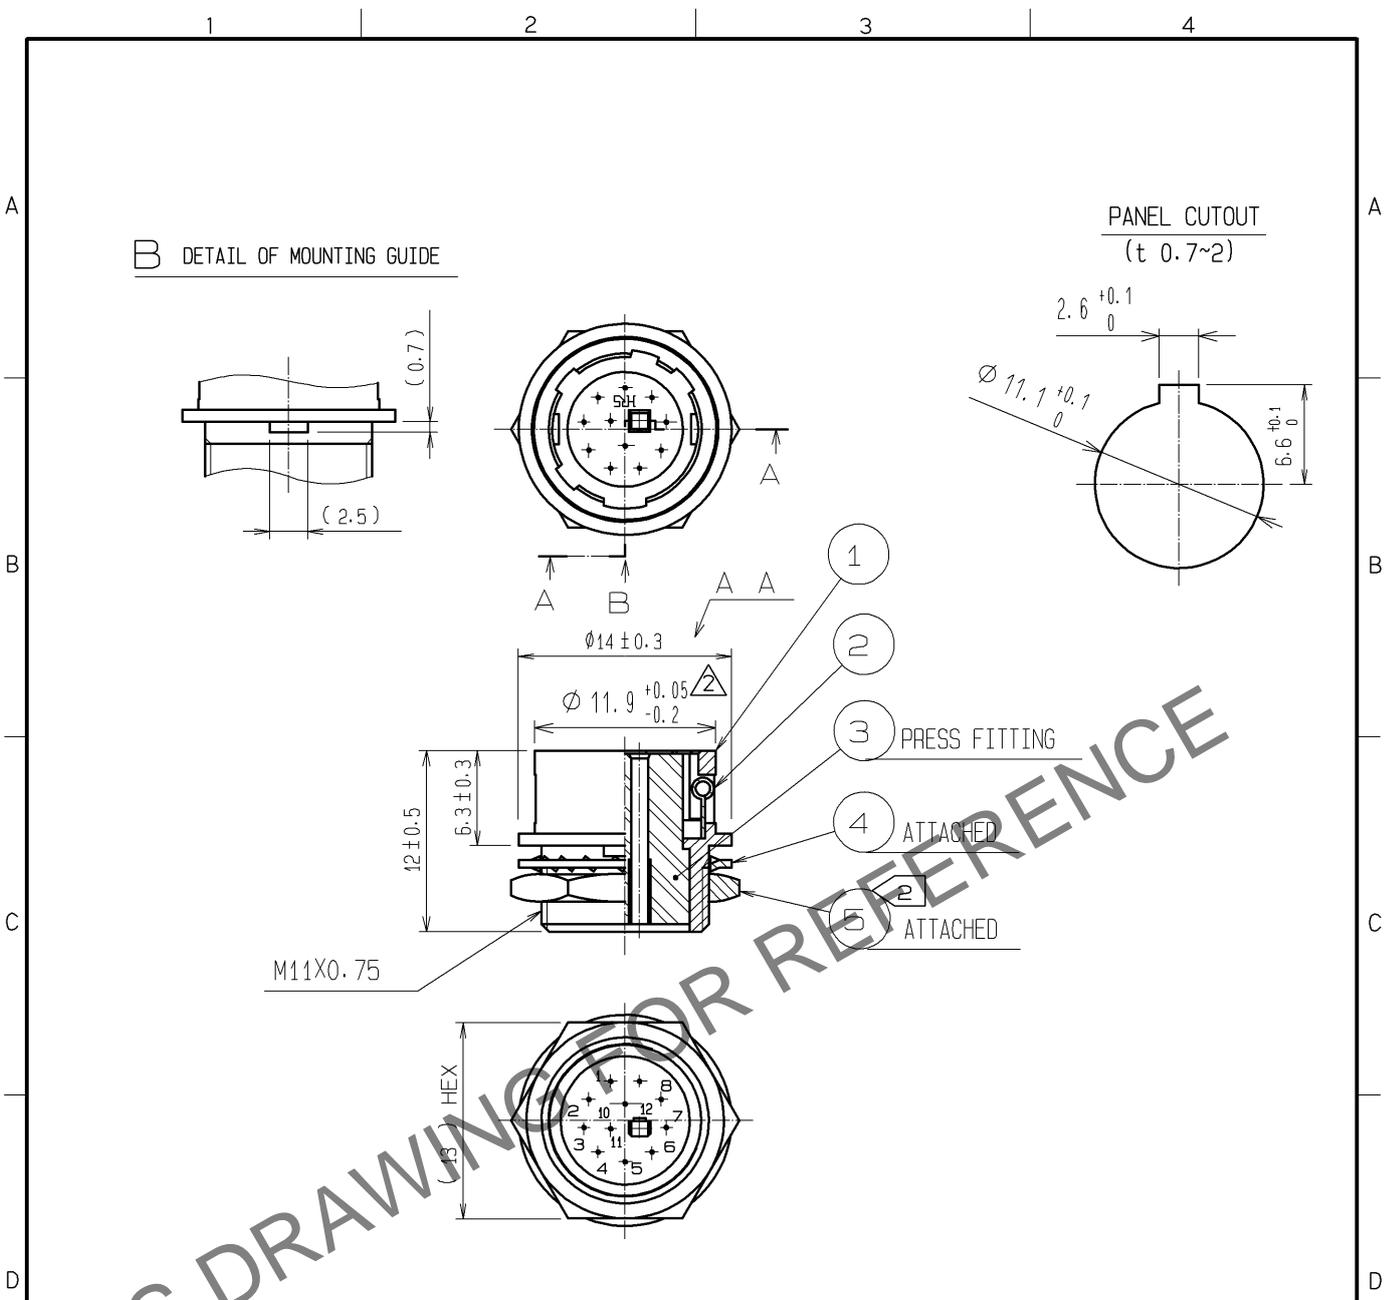

NOTES 1 APPLICABLE CRIMP CONTACT: HR12-SC-212
 (AWG#26 TO #30, INSULATION OUTER DIA Ø1 MAX)
 EXTRACTION TOOL: HR12-SC-TP

2 THE RECOMMENDED CLAMP TORQUE OF REF. NO. ⑤ : 2N·m
 LOCTITE 243, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO
 PREVENT REF. NO. ⑤ FROM LOOSENING.

NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
3	PBT	(BLACK) UL94V-0	5	BRASS	NICKEL PLATING
2	STAINLESS STEEL		4	PHOSPHOR BRONZE	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED			

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	2	DIS-C-003736	HR. SATO	HY. KISHI	14. 11. 25

HIROSE ELECTRIC CO., LTD.	APPROVED : MO. SATOH	06. 07. 23	DRAWING NO.	EDC4-021262-71
	CHECKED : EJ. KUNII	06. 07. 22	PART NO.	HR10A-10R-12SC(71)
	DESIGNED : TP. KOMATSU	06. 07. 19	CODE NO.	CL110-0608-5-71
	DRAWN : TP. KOMATSU	06. 07. 19		1/1