


Feb. 1. 2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△				..	△				..
△				..	△				..
△				..	△				..

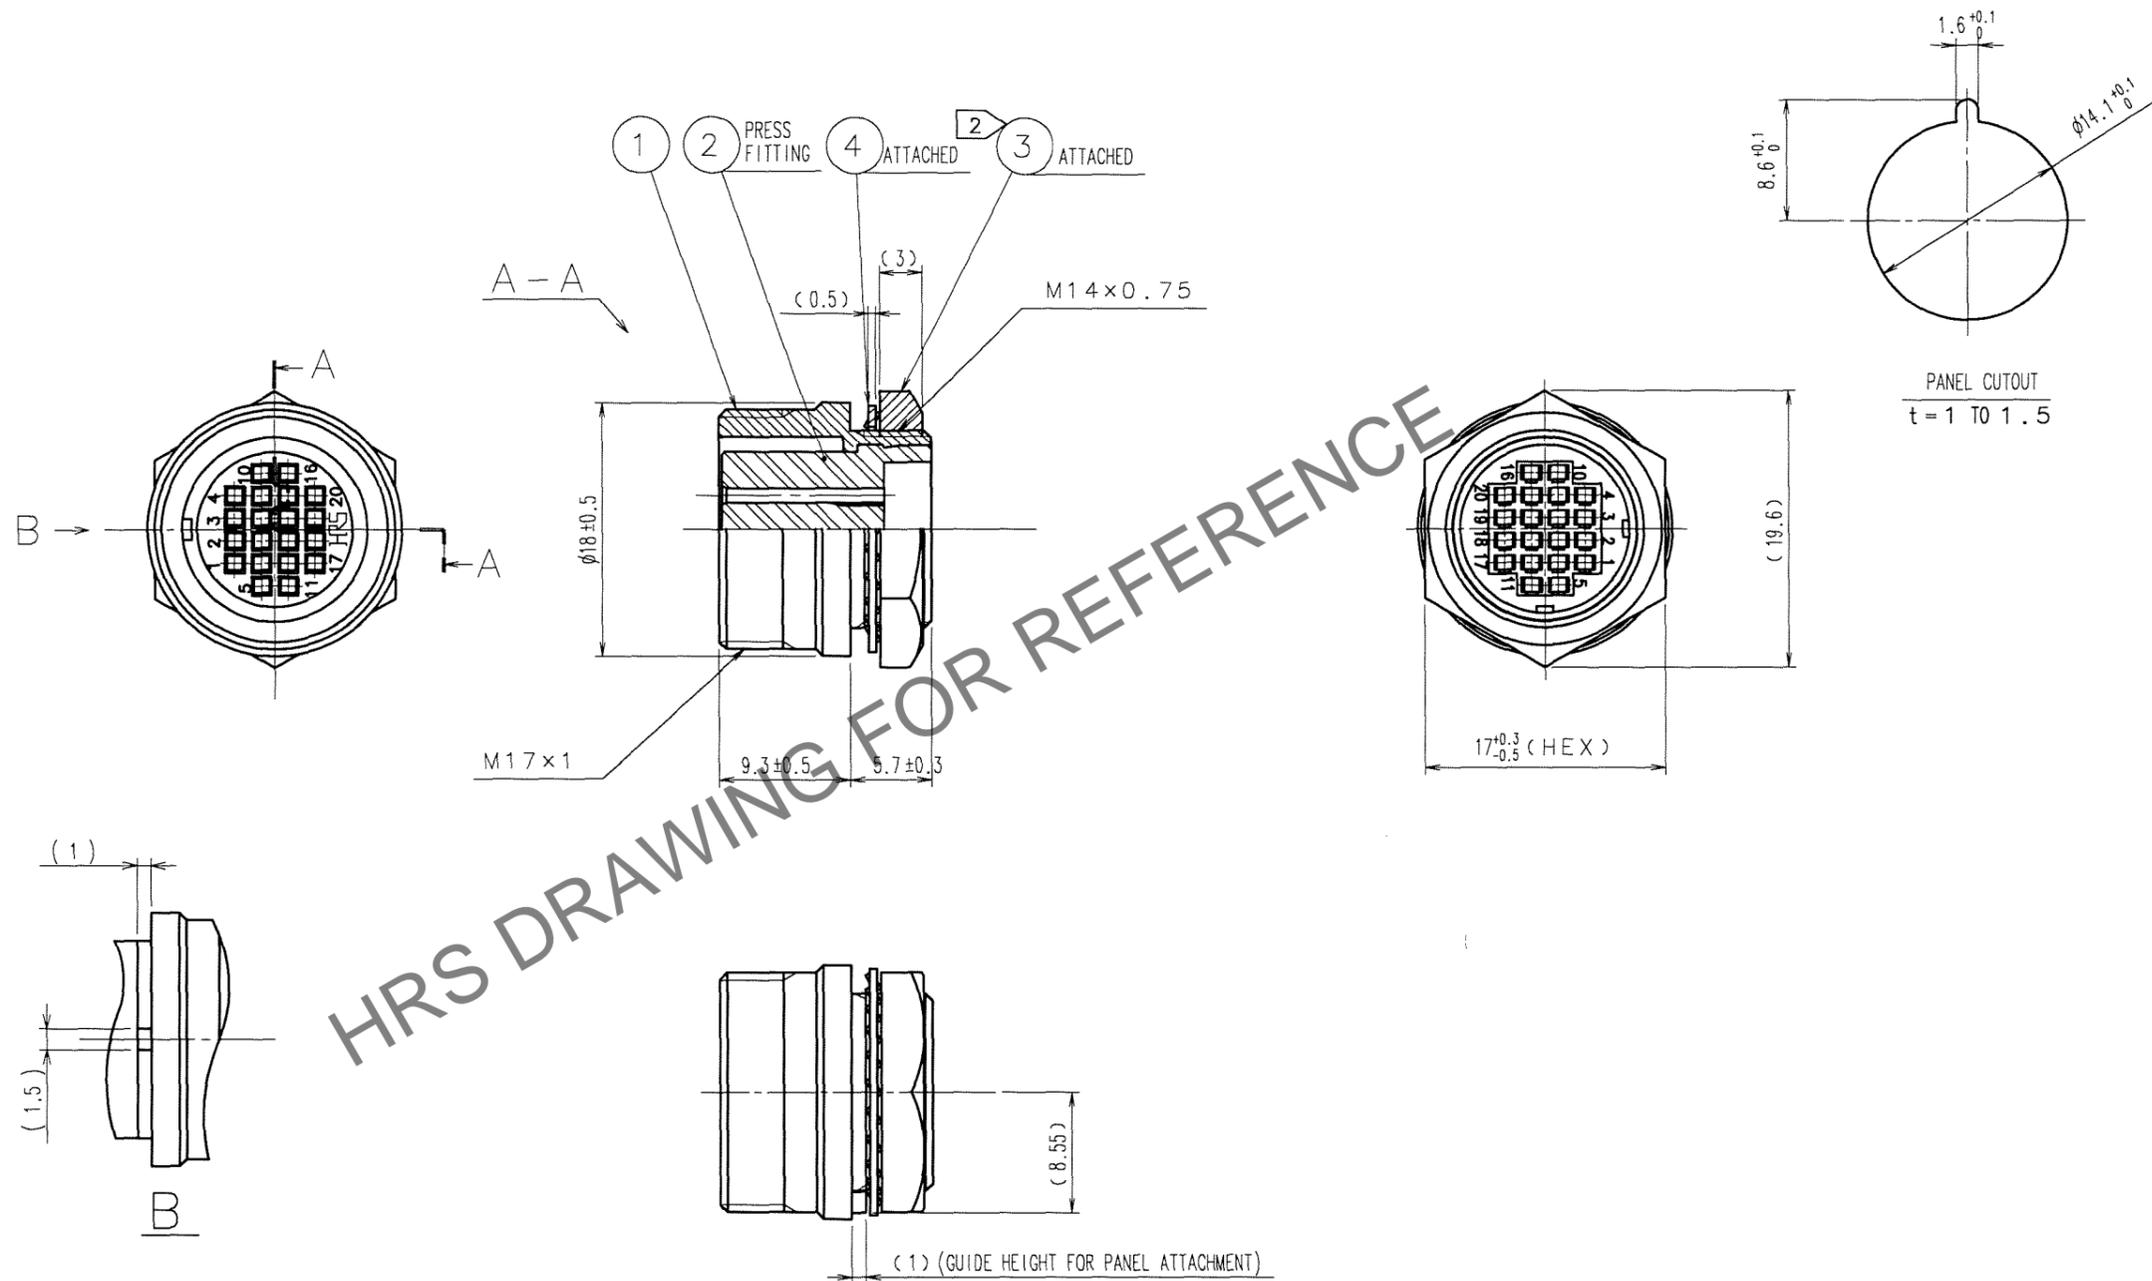

HRS DRAWING FOR REFERENCE

NOTES 1 APPLICABLE CRIMP CONTACT: HR12-SC-212 (CL112-0408-9)
 APPLICABLE WIRE: AWG#26 TO #30 (COVERED WIRE MAX, OUTSIDE DIA. φ 1)
 APPLICABLE CONTACT REMOVAL TOOL (EXTRACTION TOOL): HR12-SC-TP (CL150-0050-3)
 2 THE RECOMMENDED CLAMP TORQUE, REF. NO. 3 : 2 TO 2.5 N · m.
 LOCTITE 242, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT REF. NO. 3 FOR LOOSENING.

2	POLYBUTYLENE TEREPHTHALATE (BLACK) UL94V-0	4	PHOSPHOR BRONZE	NICKEL PLATING		
1	BRASS	NICKEL PLATING	3	BRASS	NICKEL PLATING	
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS	
CODE NO. (OLD) CL		DRAWN <i>M. Sato</i> 07.03.20	DESIGNED <i>T. Horie</i> 07.03.20	CHECKED <i>M. Sato</i> 07.03.22	APPROVED <i>M. Sato</i> 07.03.22	RELEASED ..
DRAWING NO. EDC3-027648-73			PART NO. HR10A-13TR-20SC(73)			
SCALE 2 : 1			CODE NO. CL110-1002-7-73			
UNITS mm			HRS HIROSE ELECTRIC CO., LTD			

TO
R